

LIQUID AND GASEOUS FUELS

Duoblock burners

CAPACITY 0.5 - 90 MW

บริษัท บุญเยี่ยมและสหาย จำกัด

BOONYIUM AND ASSOCIATES LTD.



1314-1322 ถ.ศรีนครินทร์

แขวงอ่อนนุช เขตสวนหลวง

กรุงเทพฯ 10250


1314-1322 SRINAKARIN Rd

ON-NUT SUANLUANG

BANGKOK 10250

Tel.02 322 1678 Fax.02 322 4329

www.boonyium.com

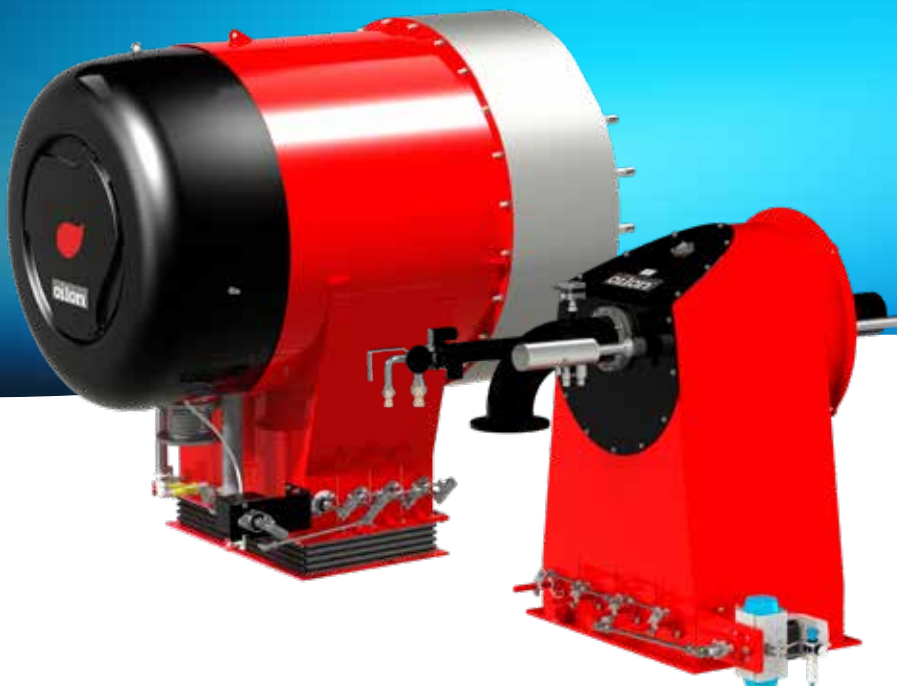

Low Emission Com-
bustion Technology



บริษัท บุญเยี่ยมและสหาย จำกัด



@boonyium



02-322 1678



info@boonyium.com

Table of contents

Oilon burners	4	LITEX burners	45
NOx emissions	5	Type labeling, LITEX burners	46
Flue gas recirculation (FGR)	6	Technical Data, LITEX burners	47
Oilon WiseDrive – High efficiency with advanced automation	9	Dimensions, LITEX burners	48
Oilon Selection Tool	14	K burners	49
Boilers and applications	15	Type labeling, K burners	50
ME burners	16	Technical data, K burners	51
Type labeling	17	Dimensions, K burners	53
Technical data	18	Lance burners	54
Dimensions	20	Type labeling, lance burners	55
Combustion head and masonry dimensions	21	Technical data, lance burners	56
Flame dimensions	22	Dimensions, lance burners	58
PI diagrams	23	Scope of delivery, S, LITEX, K, and lance burners	59
Gas valves	25	Options for S, LITEX, K, and lance burners	59
Gas elbow	26	PI diagrams for S, LITEX, K, and lance burners	60
Scope of delivery, GP/GKP/KP/RP/GRP-400...-2000 ME	27	Valve units for S, LITEX, K, and lance burners	65
Burner options, GP/GKP/KP/RP/GRP-400...-2000 ME	27	Accessories	68
Oilon ACE	28	Oilon customer service and webshop	86
Type labeling, Oilon ACE	29	Modern training facilities	87
Technical Data, Oilon ACE (Oilon standard solution)	30	Our sales and service network	88
Dimensions, Oilon ACE	33		
Boiler wall masonry, burner mounting	34		
Flame dimensions, Oilon ACE	34		
PI Diagrams, Oilon ACE	35		
Scope of delivery , Oilon ACE GT-6A...90 A, GKT/KT-6A...23A	38		
Options, Oilon ACEGT-6A...90 A, GKT/KT-6A...23A	38		
Scope of delivery, Oilon ACE GKT/KT-28A...90A, GRT-6A...90A	39		
Options, Oilon ACE GKT/KT-28A...90A, GRT-6A...90A	39		
S burners	40		
Type labeling, S burners	41		
Technical data, S burners	42		
Dimensions, S burners	44		

16 - 27

ME Burners
12 - 22.5 MW

28 - 39

Oilon ACE
0.8 - 90 MW

40-44

S burners
0.9 - 63 MW

45-48

LITEX burners
5 - 45 MW

49 - 53

K burners
0.5 - 31 MW

54 - 58

Lance burners
1.5 - 58 MW

The art of clean combustion

Oilon is an international energy technology company whose products support sustainable development by directly and measurably reducing emissions. Oilon's goal is to promote sustainable development and set a good example in the fight against climate change. As a 60-year-old family business, we find it important to preserve nature for future generations as well.

Oilon is a pioneer in first-rate low emission burner technology. Our selection of burners promotes the transition to cleaner and renewable fuels.

The excellent performance and reliability as well as the low emissions of Oilon burners are the result of decades of experience and long development. Depending on the solution, our burners can achieve the most stringent emission requirements in the world. Additionally, we provide combustion solutions for hydrogen, biogases, bio-oils, and other renewable fuels.

We have wide-ranging experience in firing different liquid and gaseous fuels. Thanks to our global dealer network, local presence on five continents, and extensive product approval and certification, we can offer burners and combustion technology to different customers and a wide range of applications across the globe.

Our modern research and development center in Lahti, Finland is equipped with the latest technology for combustion research, testing and data collection. In addition to testing, we simulate combustion processes with computational fluid dynamics (CFD) modeling.

We are especially committed to reducing nitrogen oxides (NOx) and particulate emissions.

Oilon Burners



Oilon burners for liquid and gaseous fuels are fully automatic, safe, and reliable. The burners are equipped with the latest digital technology.

Design

Oilon burners are designed for easy operation and maintenance with a particular focus on safety and minimizing environmental loads.

Applications

Oilon burners are suitable for various applications, such as hot water boilers, steam boilers, air heaters, and different process applications. They are used in, for example, fluidized bed boilers, grate boilers, and hot air generators.

Fuels

Oilon burners are suitable for various liquid and gaseous fuels, such as natural gas, LPG, biogases, hydrogen, various process gases, biooils, light fuel oil, and heavy fuel oil. Burners using other fuels are available on request.

Connectivity

Digital combustion management enables communication with external systems. Remote monitoring and diagnostics optimize operational efficiency.

Standards and legislation

We observe local rules, regulations and standards, such as EN and NFPA. Additionally, we offer burners that are compliant with marine classification society requirements.

An Oilon burner is the right choice!



NOx emissions

Nitrogen oxides (NOx) are compounds of nitrogen and oxygen, the most important of which are NO and NO2. Small amounts of nitrogen oxides occur in nature, but the majority of them originate from human action, mainly from traffic and energy production.

Nitrogen oxides are formed in all combustion processes when the nitrogen in the fuel or combustion air and the oxygen in the combustion air react at high temperatures.

Nitrogen oxides are harmful to humans and the environment in many ways. They are toxic and harmful to the respiratory system. Nitrogen oxides cause acidification and eutrophication of the environment, and they form ground-level ozone and harmful particulate emissions.

Governments around the world impose increasingly stringent emission limits to mitigate the adverse effects of nitrogen oxide emissions. Reducing nitrogen oxides is the key priority in lowering emissions from traffic and energy production.


We are especially committed to reducing nitrogen oxide (NOx) and particulate emissions. It is one of the most important objectives of our R&D processes.

Our burners achieve low NOx emissions thanks to innovative gas and air distribution and staging in the combustion head.

Another method we use to reduce NOx emissions is internal or external flue gas recirculation, which reduces flame peak temperatures and slows down the rate of reaction during combustion. Emission values depend on the furnace geometry, furnace load, and the temperature of the boiler heat transfer medium.

BURNER	NG emissions mg/Nm ³ , ref. 3% O ₂
ME	120 - 140
Oilon ACE with FGR	25 - 35
Oilon ACE without FGR	55 - 65
Litex	100 - 120

From the Oilon product portfolio, you'll find a suitable burner type for a wide range of emission level and other emission requirements.

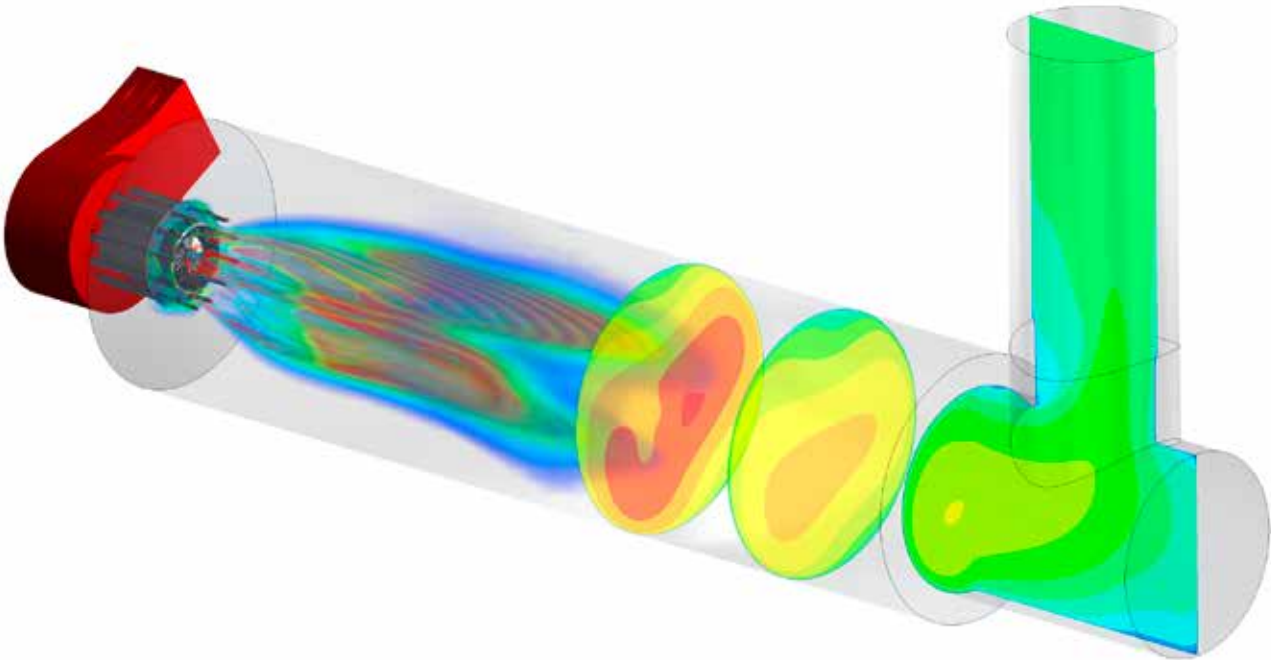


Flue Gas Recirculation (FGR) is an effective and economical solution to achieve extremely low NOx emission levels with various fuels.

In external FGR, a certain proportion of flue gas is led back to the furnace through the burner. This reduces peak temperatures in the flame and slows down combustion reactions, reducing NOx emissions.


Achievable reduction depends on many factors, including burner type, boiler, combustion air temperature, and the amount of flue gas being recirculated (see the diagram). When designing the configuration, it is important to note that flue gas recirculation reduces the burner's maximum output depending on the FGR rate and flue gas temperature.

FGR is available for a variety of new burners and in many cases, as a retrofit to an existing burner.

The effect of FGR in natural gas combustion

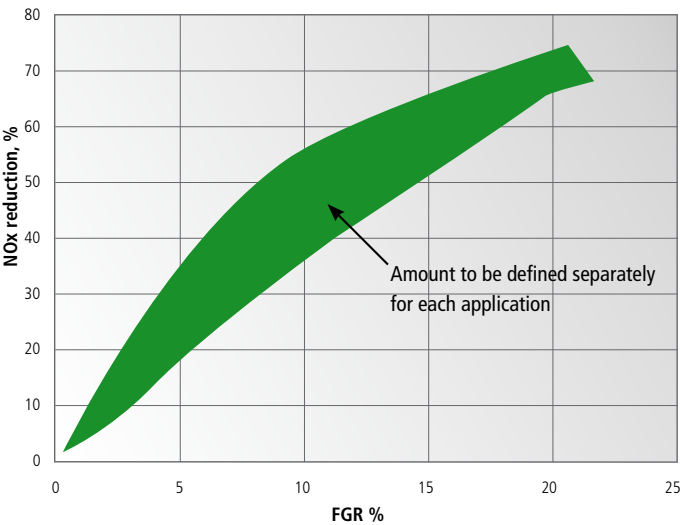


Example of gas mixture temperature in FGR application

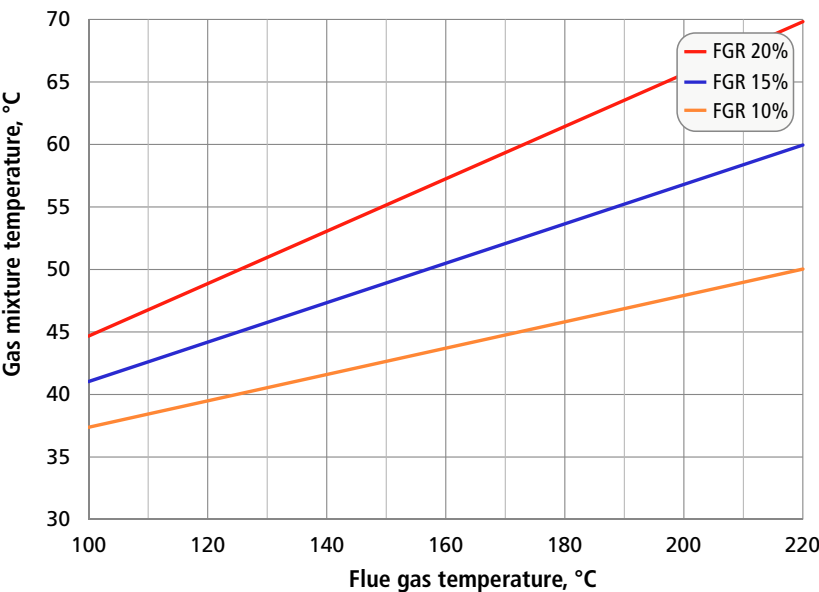

The diagram is valid when combustion air temperature is +35 °C.

An Oilon burner in an FGR application

1. FGR with valve

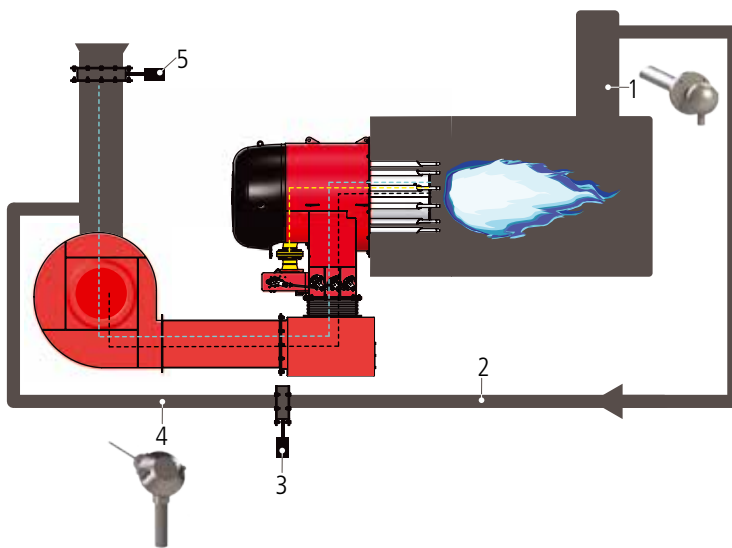


1. O₂ sensor (option)
2. Recirculation pipe
3. Flue gas valve
4. Temperature sensor (option)
5. Throttle damper

FGR feeds flue gas to the suction side of the combustion air fan.

- This solution is preferred when the amount of recirculated flue gas is low.
- An air throttle valve ensures sufficient FGR flow at all load points and when the pressure in the flue gas duct is lower than the air pressure before the fan.
- If combustion air is very cold, it is advisable to install a preheater. This will prevent condensation when flue gas and air is mixed.

2. FGR with FGR fan, feed from the suction side

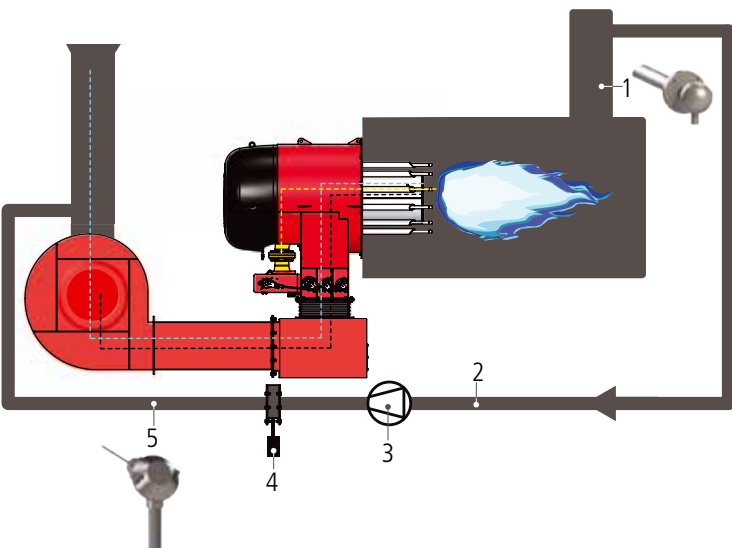


1. O₂ sensor (option)
2. Recirculation pipe
3. Flue gas fan
4. Flue gas valve
5. Temperature sensor (option)

Flue gas is fed to the suction side of the combustion air fan.

- This solution is preferred when the volume of recirculated flue gas is high.
- If combustion air is very cold, it is advisable to install a preheater. This will prevent condensation when flue gas and air is mixed.

3. FGR with FGR fan, feed from the pressure side

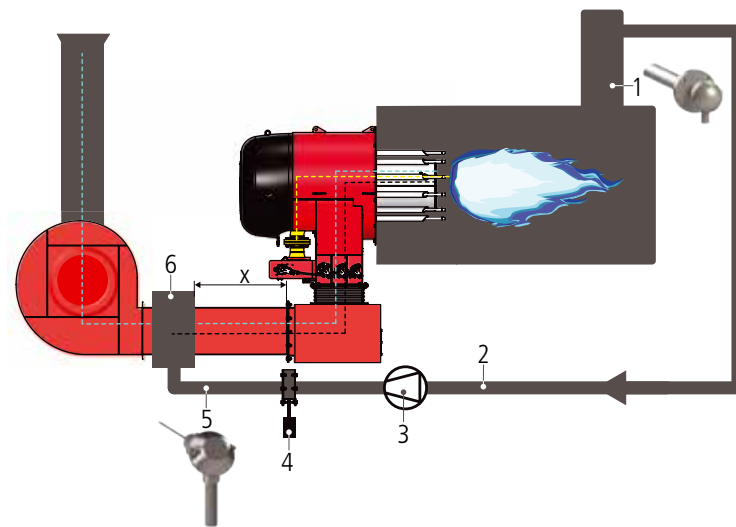





1. O₂ sensor (option)
2. Recirculation pipe
3. Flue gas fan
4. Flue gas valve
5. Temperature sensor (option)
6. Mixing chamber

Flue gas is fed to the pressure side of the combustion air fan.

- This solution is preferred in retrofit cases where the existing air fan has insufficient capacity for the new FGR system.
- One of the solution's benefits is that there will be no condensation in the combustion air fan even if combustion air is very cold and it isn't preheated.
- Combustion air and flue gas must be mixed together using a solution approved by Oilon.
- The FGR fan has to be equipped with a variable speed drive or suction vane controller.

8

FGR condensing zones

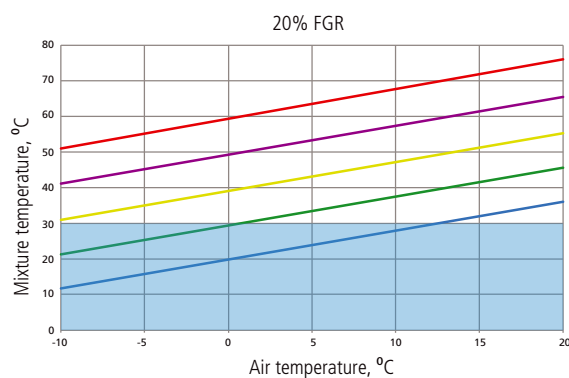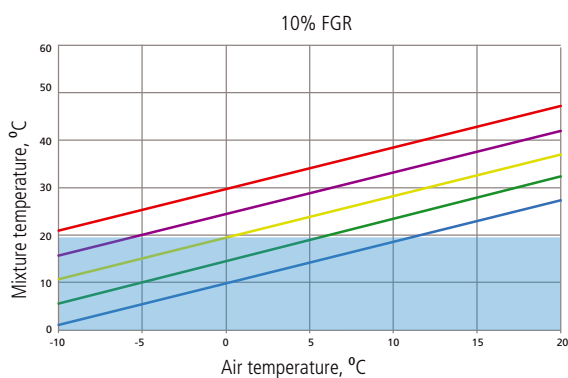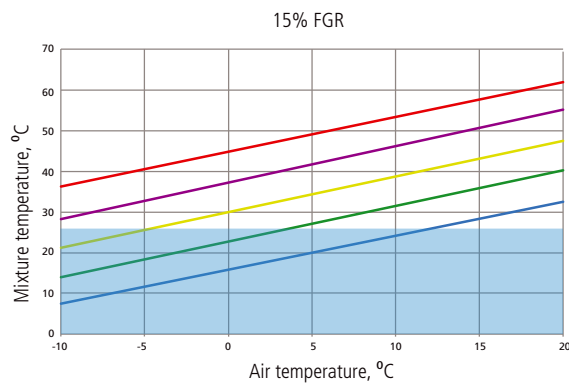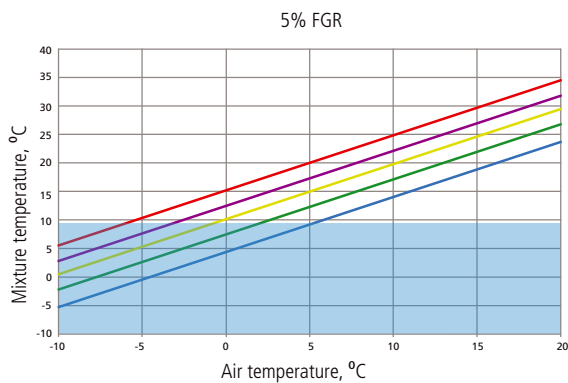

- FGR 100 °C
- FGR 150 °C
- FGR 200 °C
- FGR 250 °C
- FGR 300 °C
- Condensing zone



Oilon WiseDrive – High efficiency with advanced automation


Oilon WiseDrive is an electronic burner management system. In the WiseDrive system, combustion air dampers and control valves have their own actuators. The ratio between the fuel control valve and combustion air flow is adjusted electronically. The WiseDrive system handles the burner's control and safety functions and offers a range of other features.

High efficiency

Oilon WiseDrive control improves combustion efficiency and lowers emissions. In dual-fuel and multi-fuel burners, combustion can be optimized both for the main and the reserve fuel. O₂ control is also available for both. Additionally, significant energy savings can be achieved by fitting a variable speed drive (VSD) for the combustion air fan.

A versatile system

The Oilon WiseDrive system can be connected to external systems via a fieldbus connection. Data regarding burner status and combustion process can be read remotely. Additionally, the system supports remote control (start, stop, reset) and setting configuration (capacity controller, fuel selection) through a fieldbus.

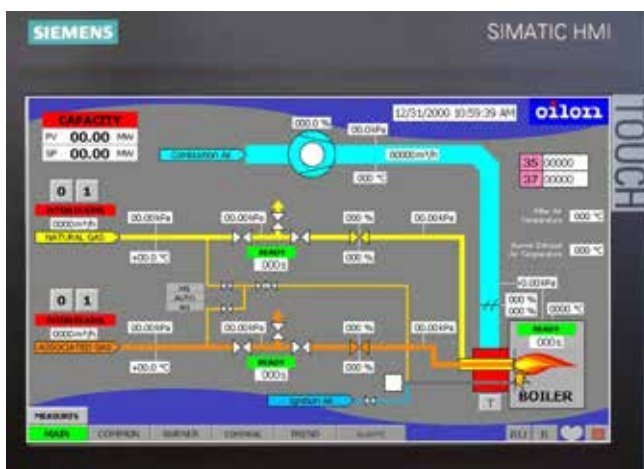

CONTROL SYSTEMS	WD100	WD200	WD1000	WD2000
OPERATIONAL PRINCIPLE	Electronic fuel/air	Electronic fuel/air	Electronic fuel/air	Electronic fuel/air
CONTROL UNIT	Siemens LMV51	Siemens LMV52	Lamtec control unit	Siemens PLC
AVAILABLE FOR FUELS	LFO HFO GAS LFO/GAS HFO/GAS	LFO HFO GAS LFO/GAS HFO/GAS	LFO HFO GAS LFO/GAS HFO/GAS	LFO HFO GAS LFO/GAS HFO/GAS
ATOMIZING METHOD	Pressure atomizing	Pressure atomizing	Air/steam atomizing	Air/steam atomizing
O ₂ CONTROL	Not available	Optional	Optional	Optional
CO CONTROL	Not available	Not available	Optional	Not available
VSD CONTROL	Not available	Optional	Included	Included
CONTROL PANEL INTERFACE	Text display	Text display	Text display (Touch panel, option)	Touch panel
EXTERNAL COMMUNICATION	Hardwired+Modbus Profibus (optional)	Hardwired+Modbus Profibus (optional)	Hardwired (+ optional fieldbus)	Hardwired+Profibus (or optional fieldbus)
CAPACITY CONTROL	Built in Pressure/Temperature	Built in Pressure/Temperature	Built in Pressure/Temperature or external reference	Built in Pressure/Temperature or external reference
FGR	Not available	Optional	Optional	Optional
CONTROL PRINCIPLE	Position control	Position control	Position control	Position control/flow control
SIMULTANEOUS FIRING	Not available	Not available	Optional	Included
BMS SUPPLY VOLTAGE	110 or 240 V AC	110 or 240 V AC	110 or 240 V AC	110 or 240 V AC
HAZARDOUS AREA CLASSIFICATION FOR THE SYSTEM	Not available	Not available	Optional *	Optional *


* The BMS cabinet itself isn't classified.



WiseDrive (WD) electronic burner management system – an energy-efficient and environmentally friendly solution

The Oilon WiseDrive system lowers flue gas emissions, decreases energy consumption, and gives the burner improved technical capabilities, such as more precise regulation. The WiseDrive system features electrical control sequences, fuel/air ratio and capacity control as well as all the necessary functions for safe and reliable operation. Our experts will determine the required level of safety and system redundancy based on the customer's process conditions and requirements. Oilon WiseDrive systems are factory tested (FAT) to guarantee quick and smooth start-up for the combustion equipment at the plant.


Oilon WiseDrive WD100/WD200, example

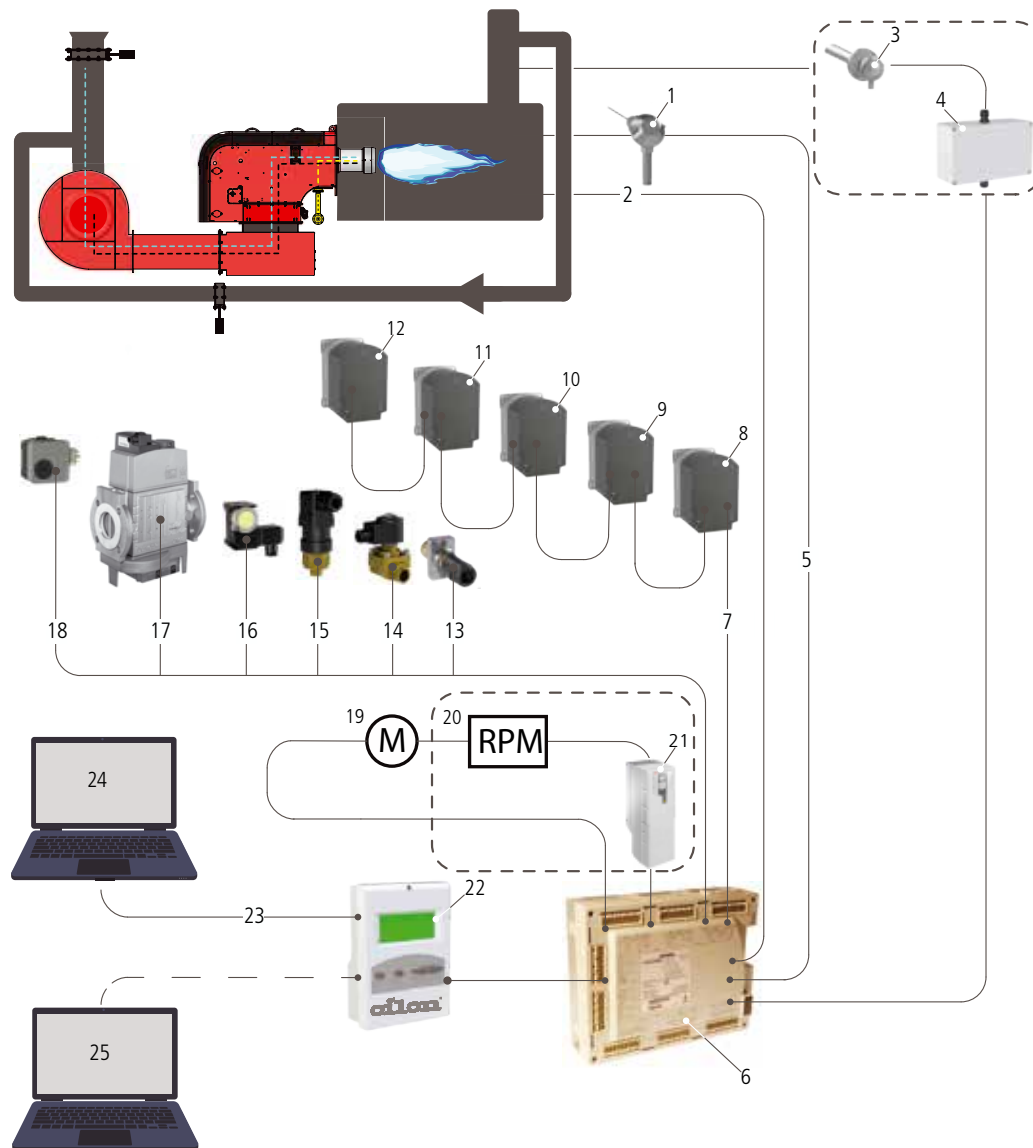


The images are for illustration purposes only.

- | | |
|--|--|
| 1. Boiler temperature | 17. Gas shut-off valves |
| 2. Safety devices | 18. Air pressure switch |
| 3. O ₂ sensor (option), WD200 | 19. Motor, WD200 |
| 4. O ₂ module (option), WD200 | 20. RPM (option), WD200 |
| 5. CAN bus | 21. Variable speed drive for speed control (option), WD200 |
| 6. Control unit | 22. User interface |
| 7. CAN bus for actuators | 23. Modbus |
| 8 - 12. Up to five actuators | 24. Control room |
| 13. Flame detector | 25. Service computer |
| 14. Oil shut-off valves | |
| 15. Oil pressure switch | |
| 16. Gas pressure switch | |

Oilon WiseDrive WD1000, example

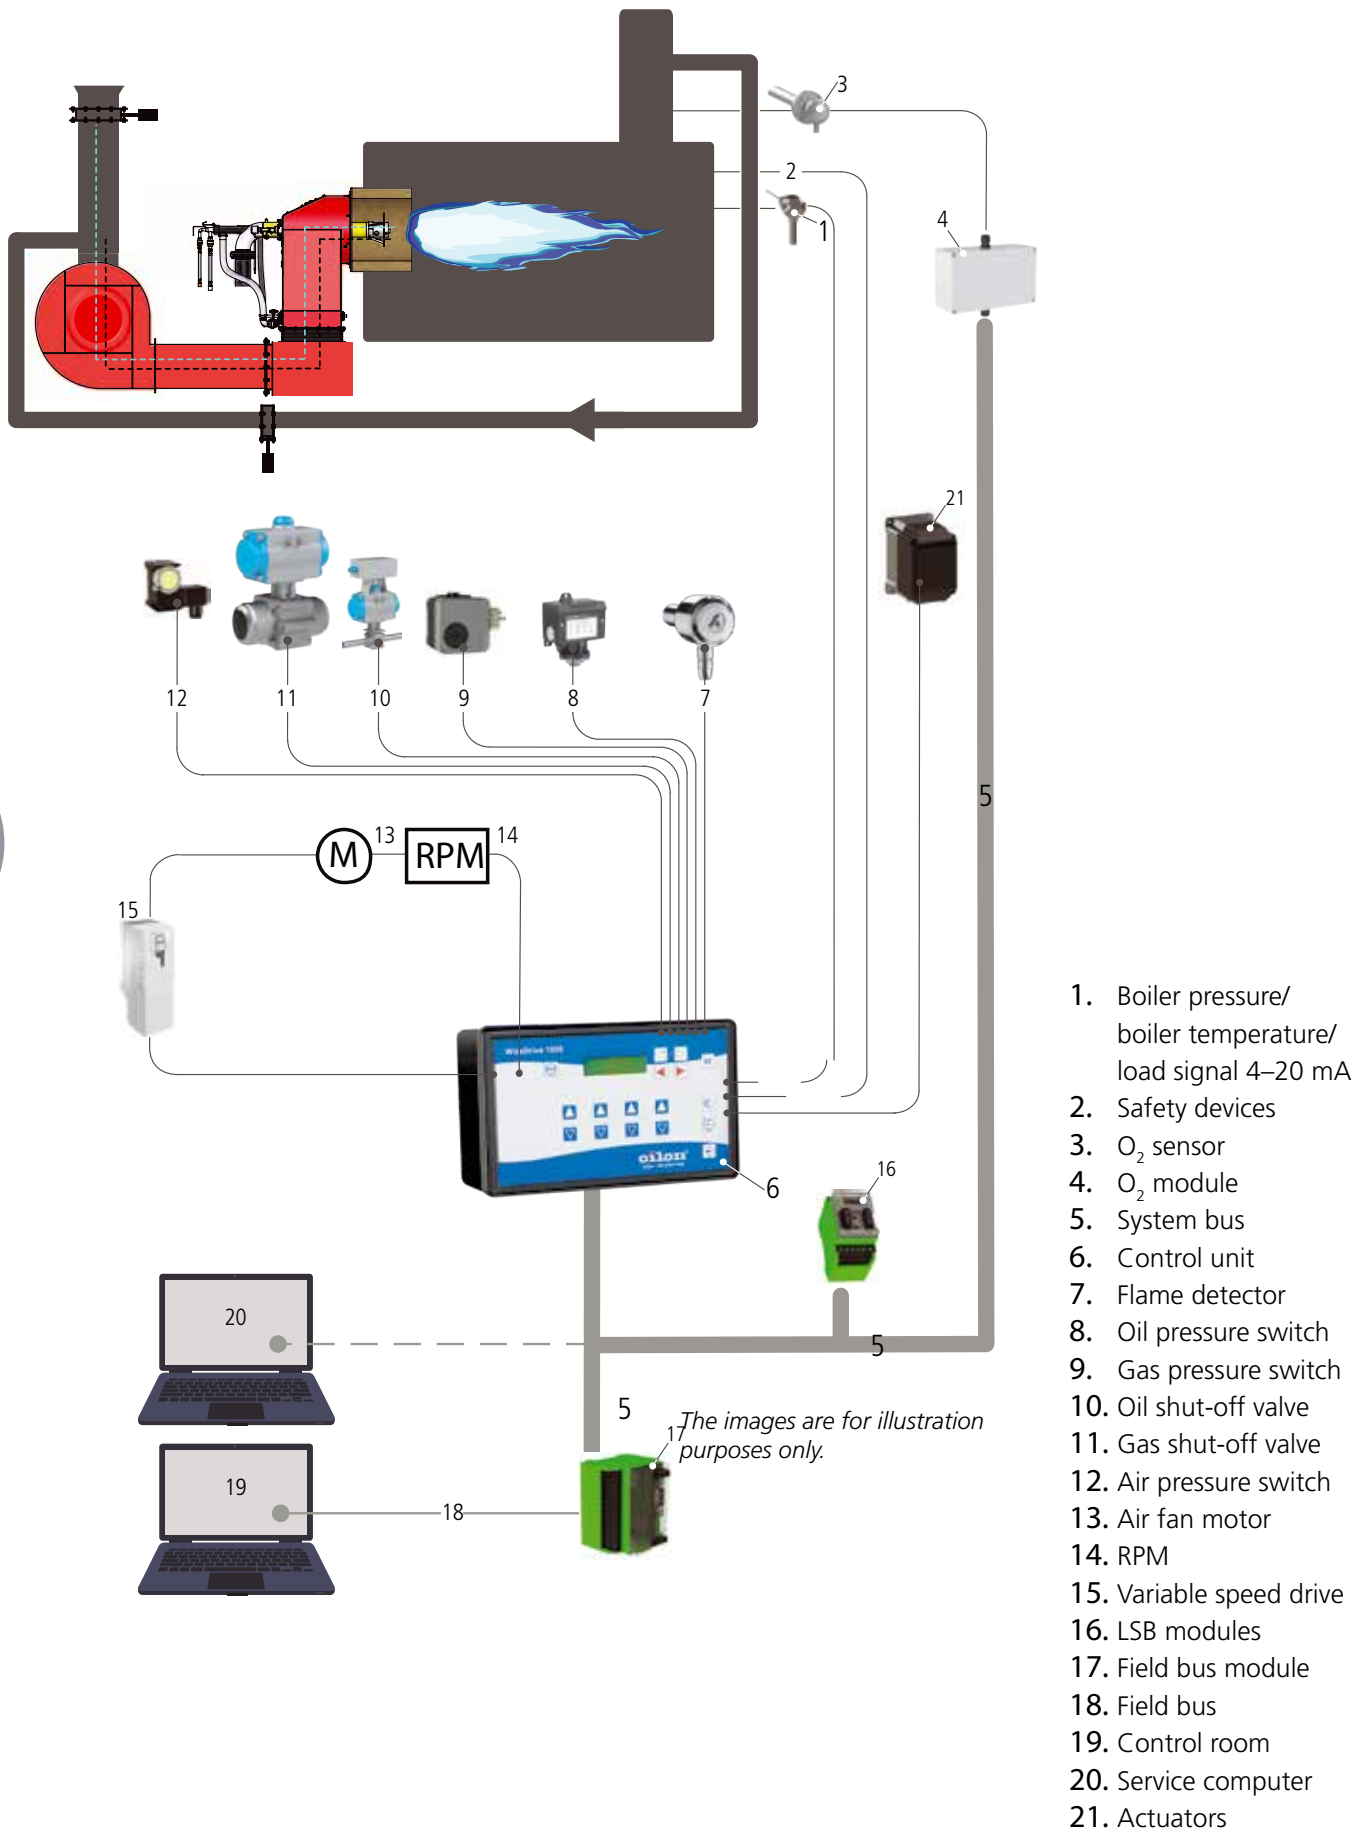

Oilon WiseDrive WD2000 (PLC), example

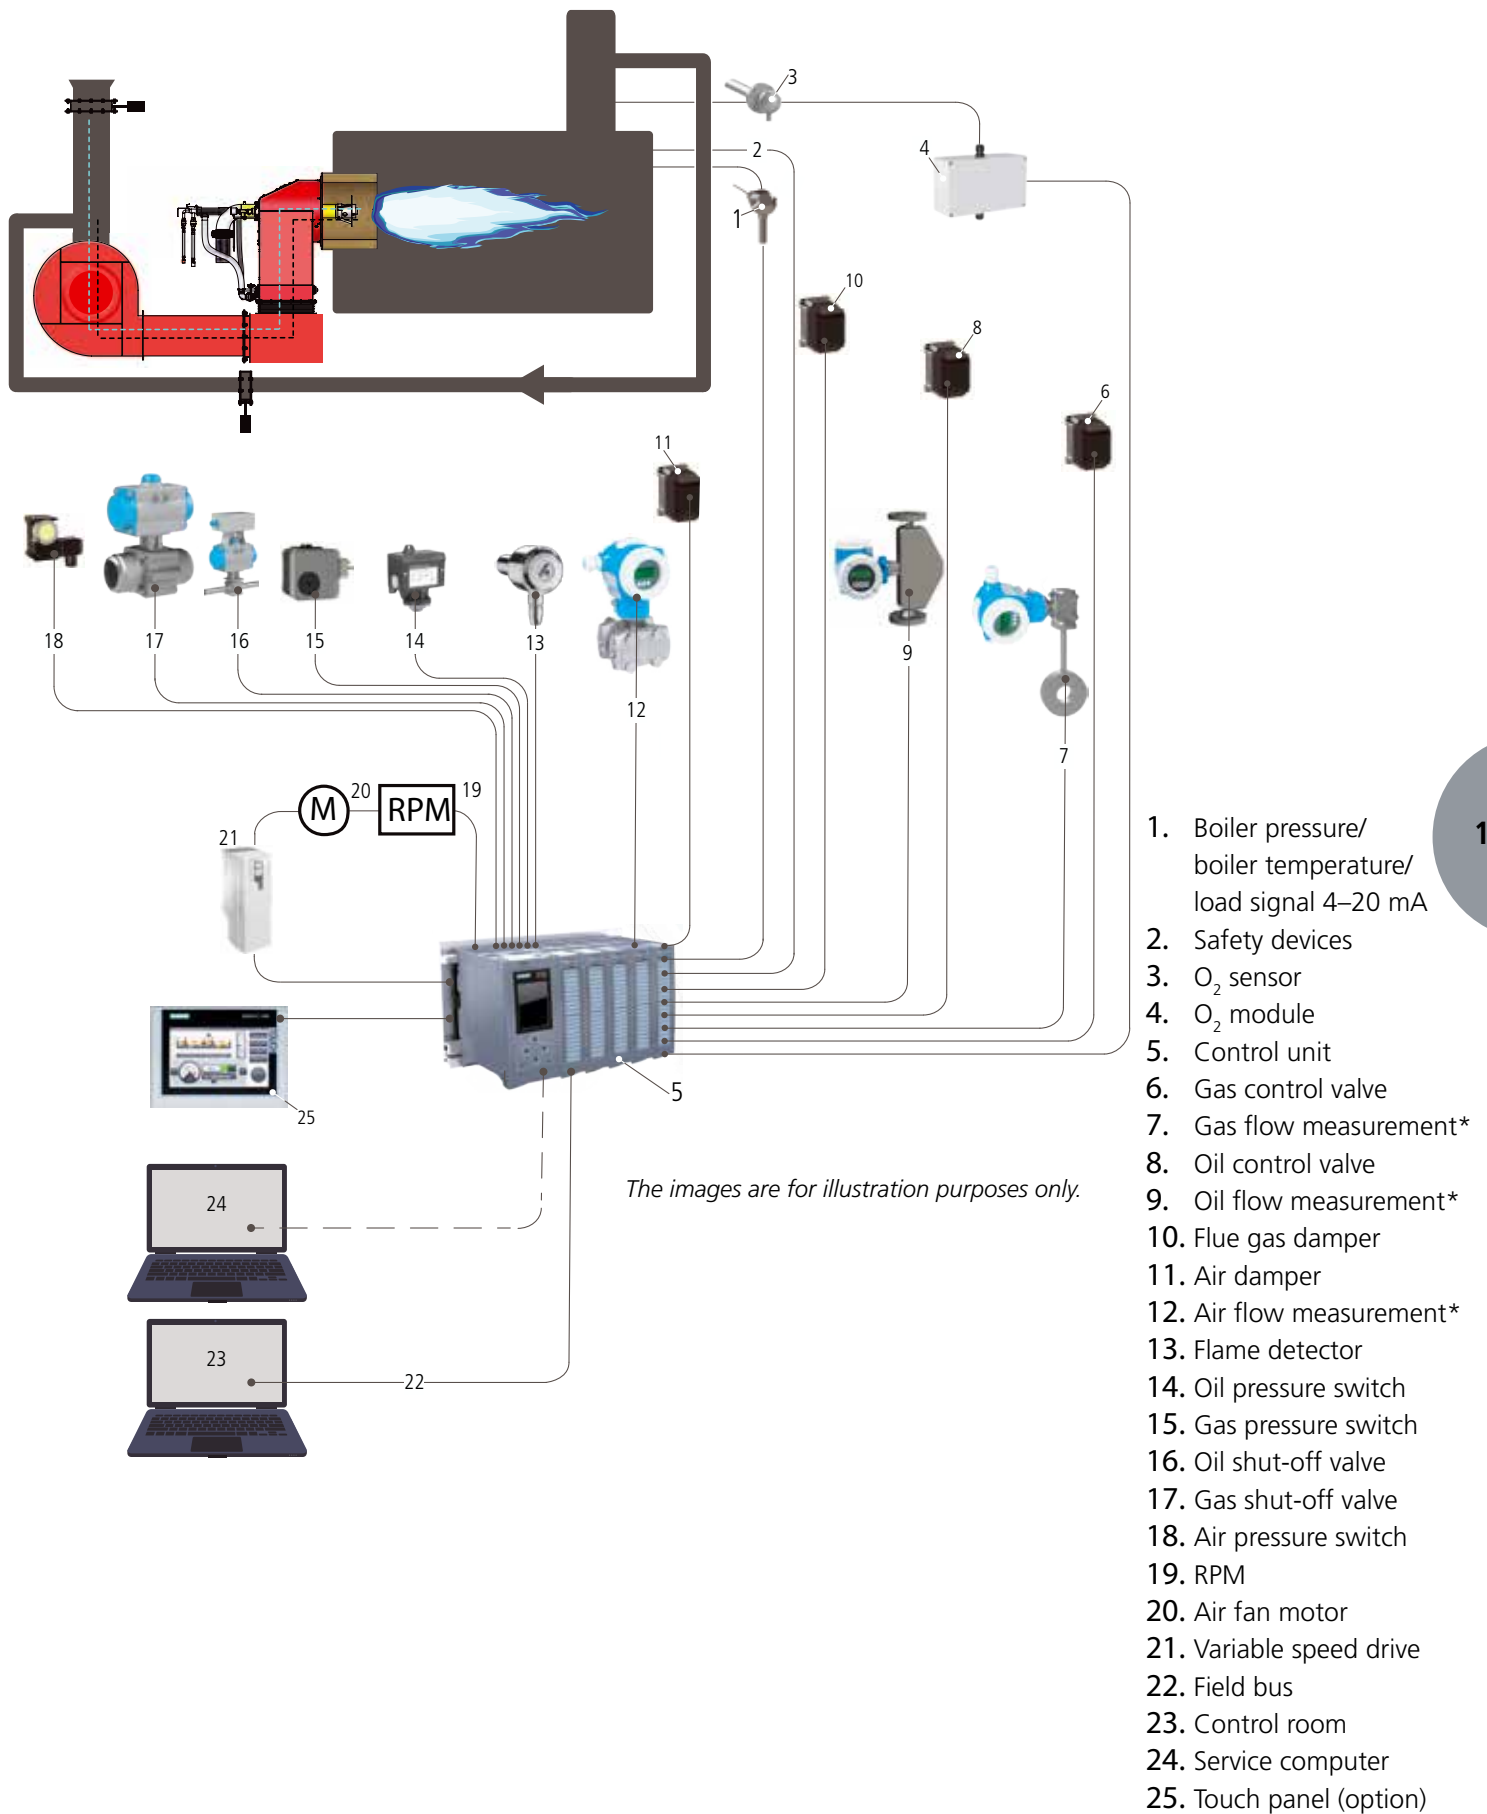



Oilon Selection Tool

Oilon selection Tool makes it easy to select the best product and the best accessories for the job from Oilon's extensive product range.

With our user-friendly software, you can select several products for quick comparison and perform advanced system calculations. Available in several languages, Oilon Selection Tool allows you to access an extensive range of product information and calculation results, and enables you to form detailed technical specifications.

Oilon Selection Tool is continuously updated as new products, features, functionalities and improvements are added. Automatic software updates ensure that you always have access to the latest features and product information.

Oilon Selection Tool can be downloaded from www.oilon.com and installed locally to your Windows, Mac or Linux computer.

Boilers and applications

	Burner type					
	ME	OILON ACE	LITEX	S BURNERS	K BURNERS	LANCE BURNERS
Boilers/furnaces						
Gas- or oil-fired boilers	O	O	O	O		
Thermal oil heaters	O	O	O	O	O	
Fluidized bed boilers		O		O		O
Recovery boilers				O	O	
Grate boilers		O		O	O	O
Rotary kilns					O	
Hot air generators	O	O		O	O	O
Process furnaces	O			O	O	O
Applications/ processes:						
District heating plants	O	O	O	O		O
Power plants	O	O	O	O	O	O
Pulp and paper		O		O	O	O
Waste-to-energy		O			O	O
Hazardous waste incineration					O	
Process industry	O			O	O	O
Chemical industry				O	O	O
Petrochemical industry		O		O	O	
Metallurgy					O	O
Marine	O	O	O	O		

A number of reference cases can be found at www.oilon.com




ME Burners

12 - 22.5 MW

ME burners are duoblock burners that can be used in various boiler and process heating applications. They have an excellent turndown ratio especially when firing gas, providing additional flexibility in steam boiler use. The burners can also be used with hot combustion air (+250 °C). Thanks to optimized design, ME burners are easy to operate and maintain.

Type labeling

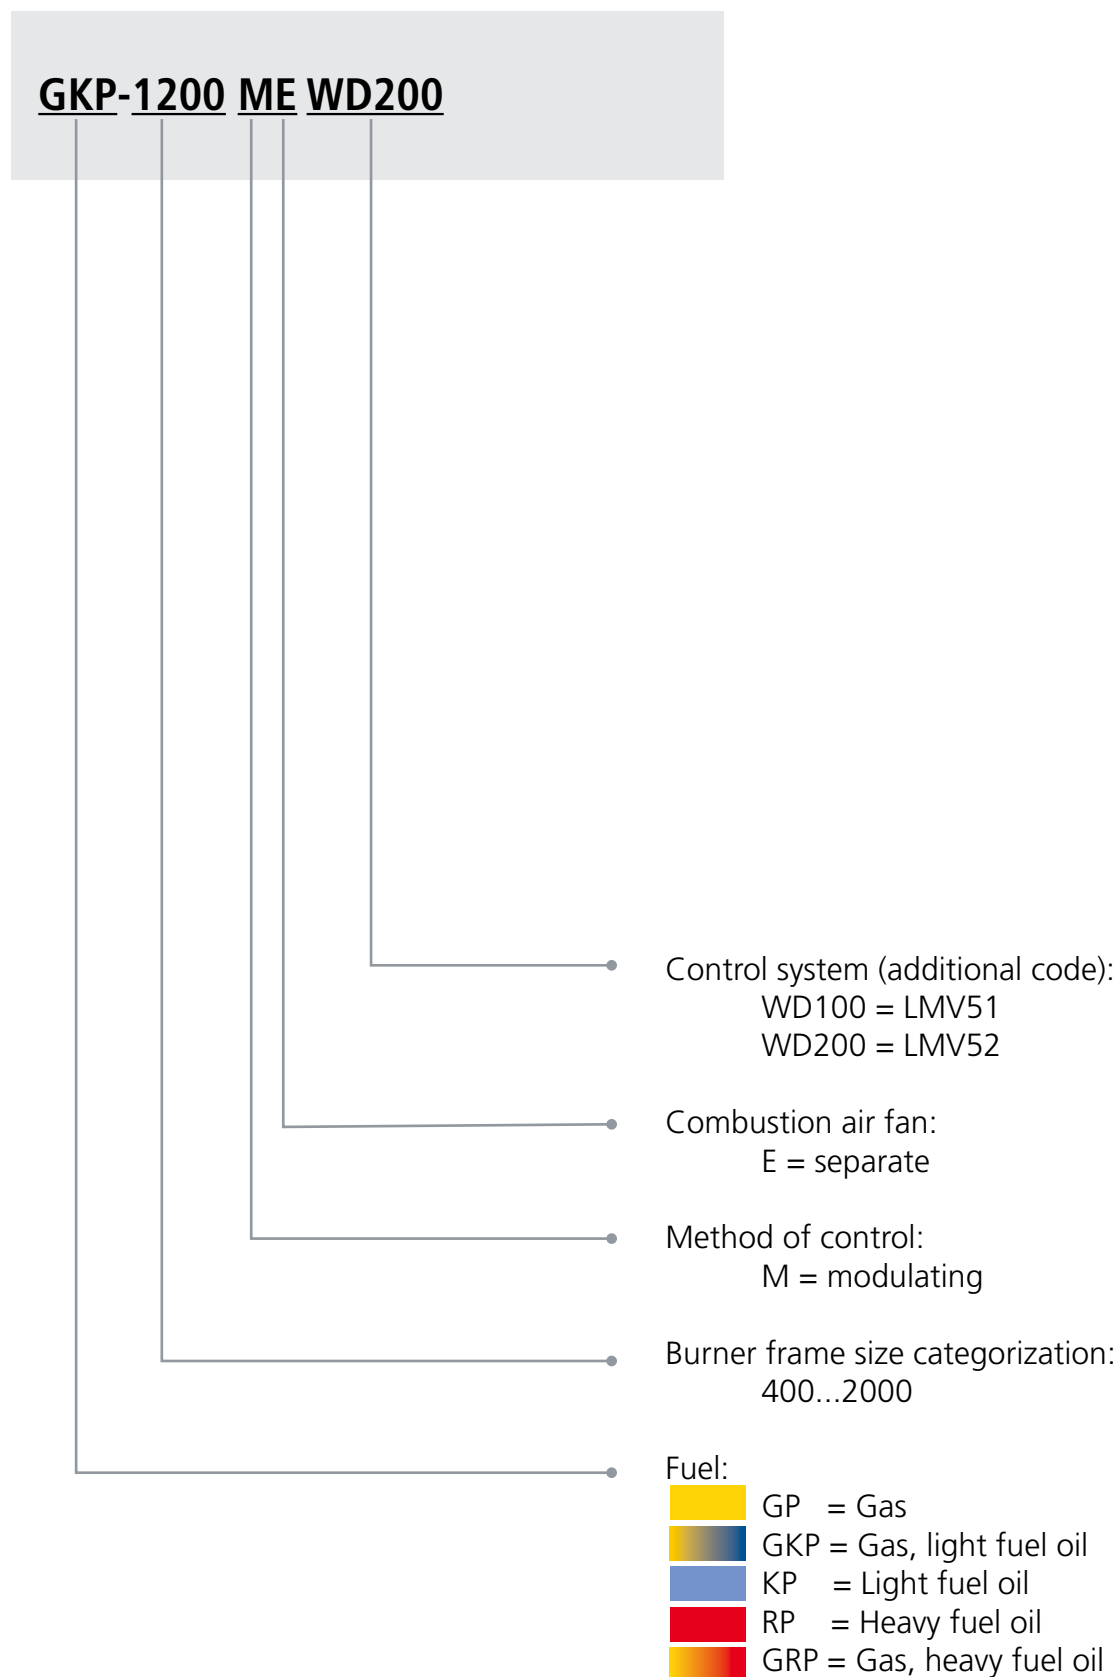

GP/GKP/KP/RP/GRP-400...-2000 ME

Technical data

BURNER	GP-400 ME	GP-600 ME	GP-800 ME	GP-1000 ME	GP-1200 ME	GP-1600 ME	GP-2000 ME
Capacity,* MW	1.2 - 5.0	1.7 - 6.8	1.9 - 9.5	2.0 - 12.0	2.8 - 14.0	3.3 - 16.5	4.5 - 22.5
Connections – gas	DN50 – 100	DN50 – 100	DN65 – 125	DN65 – 125	DN80 – 125	DN100 – 125	DN100 – 125
Pilot burner – fuel	NG						
Control unit	WD100/WD200						
Weight, kg	360	370	430	460	460	620	620

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

BURNER	GKP-400 ME	GKP-600 ME	GKP-800 ME	GKP-1000 ME	GKP-1200 ME	GKP-1600 ME	GKP-2000 ME
Capacity * – gas, MW – oil, MW kg/h	1.2 - 5.0 1.2 - 5.0 100 - 420	1.7 - 6.8 1.7 - 6.8 143 - 573	1.9 - 9.5 2.4 - 9.5 200 - 800	2.0 - 12.0 3.0 - 12.0 250 - 1000	2.8 - 14.0 3.5 - 14.0 300 - 1200	3.3 - 16.5 4.2 - 16.5 350 - 1400	4.5 - 22.5 5.6 - 22.5 470 - 1900
Connections – gas – oil	DN50 - 100 2 x Ø 22	DN50 - 100 2 x Ø 22	DN65 - 125 2 x Ø 22	DN65 - 125 2 x Ø 22	DN80 - 125 2 x Ø 22	DN100- 125 2 x Ø 22	DN100 - 125 2 x Ø 22
Pilot burner – fuel	NG		NG LFO or optionally LPG (connection size Ø 22)				
Atomizing method	Pressure atomization						
Control unit	WD100/WD200						
Weight, kg	390	400	480	490	490	690	690

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

BURNER	KP-400 ME	KP-600 ME	KP-800 ME	KP-1000 ME	KP-1200 ME	KP-1600 ME	KP-2000 ME
Capacity,* MW kg/h	1.2 - 5.0 100 - 420	1.7 - 6.8 143 - 573	2.4 - 9.5 200 - 800	3.0 - 12.0 250 - 1000	3.5 - 14.0 300 - 1200	4.2 - 16.5 350 - 1400	5.6 - 22.5 470 - 1900
Connections – oil	2 x Ø 22	2 x Ø 22	2 x Ø 22	2 x Ø 22	2 x Ø 22	2 x Ø 22	2 x Ø 22
Pilot burner – fuel	–	–	LFO or optionally LPG (connection size Ø 22)				
Atomizing method	Pressure atomization						
Control unit	WD100/WD200						
Weight, kg	370	380	460	470	470	670	670

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

BURNER	RP-400 ME	RP-600 ME	RP-800 ME	RP-1000 ME	RP-1200 ME	RP-1600 ME	RP-2000 ME
Capacity,* MW kg/h	1.2 - 4.7 106 - 417	1.7 - 6.8 150 - 600	2.2 - 9.0 200 - 800	2.8 - 11.0 250 - 1000	3.4 - 13.0 300 - 1200	3.9 - 15.5 350 - 1400	5.3 - 21.0 470 - 1900
Connections – oil	2 x Ø 22	2 x Ø 22	2 x Ø 22	2 x Ø 22	2 x Ø 22	2 x Ø 22	2 x Ø 22
Pilot burner – fuel	–	LPG (connection size Ø 18)	LPG (connection size Ø 22)				
Atomizing method	Pressure atomization						
Control unit	WD100/WD200						
Weight, kg	380	390	470	480	480	680	680


*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

BURNER	GRP-400 ME	GRP-600 ME	GRP-800 ME	GRP-1000 ME	GRP-1200 ME	GRP-1600 ME	GRP-2000 ME
Capacity – gas MW – oil MW kg/h	1.2 - 5.0 1.2 - 4.7 106 - 417	1.7 - 6.8 1.7 - 6.8 150 - 600	1.9 - 9.5 2.2 - 9.0 200 - 800	2.0 - 12.0 2.8 - 11.0 250 - 1000	2.8 - 14.0 3.4 - 13.0 300 - 1200	3.3 - 16.5 3.9 - 15.5 350 - 1400	4.5 - 22.5 5.3 - 21.0 470 - 1900
Connections – gas – oil	DN50 - 100 2 x Ø 22	DN50 - 100 2 x Ø 22	DN65 - 125 2 x Ø 22	DN65 - 125 2 x Ø 22	DN80 - 125 2 x Ø 22	DN100 - 125 2 x Ø 22	DN100 - 125 2 x Ø 22
Pilot burner – fuel	NG LPG (connection size Ø 18)		NG LPG (connection size Ø 22)				
Atomizing method	Pressure atomization						
Control unit	WD100/WD200						
Weight, kg	400	410	490	500	500	700	700

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.


Light fuel oil:	1 kg/h \cong 11.86 kW 1 kW \cong 860 kcal/h	Regulating range: Light fuel oil: 1:3 (100 - 33%) Heavy fuel oil: 1:2.5 (100 - 40%) Gas: 1:5 (100 - 20% , 1:4 /400/600)
Heavy fuel oil:	1 kg/h \cong 11.22 kW 1 kW \cong 860 kcal/h	
Natural gas:	caloric value $H_u = 9.5$ kWh/m ³ n (34.3 MJ/m ³ n) density $p = 0.723$ kg/m ³ n	

Dimensions

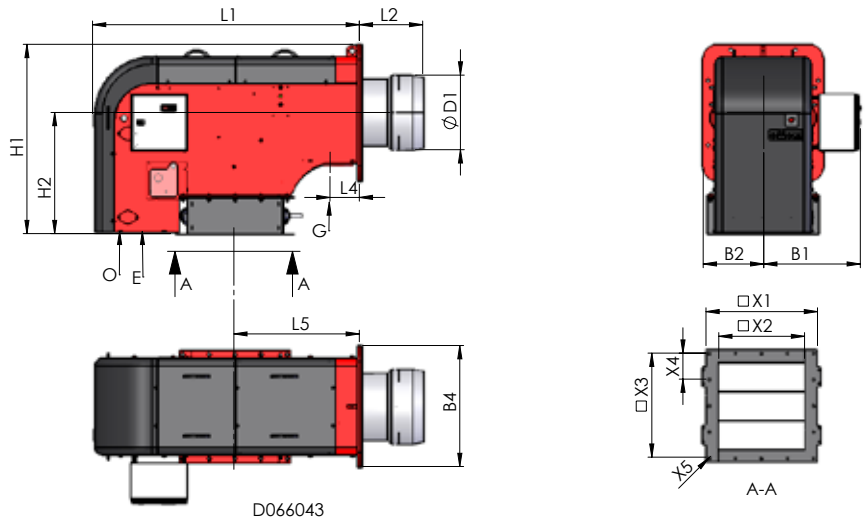

BURNER	L1	L2	L4	L5	H1	H2
400 ME	1410	325	155	664	1000	640
600 ME	1410	335	155	664	1000	640

BURNER	B1	B2	B4	Ø D1	□X1	□X2	□X3	X4	X5
400 ME	511	320	640	370	590	460	550	4 x 137.5	16 x Ø12
600 ME	511	320	640	395	590	460	550	4 x 137.5	16 x Ø12

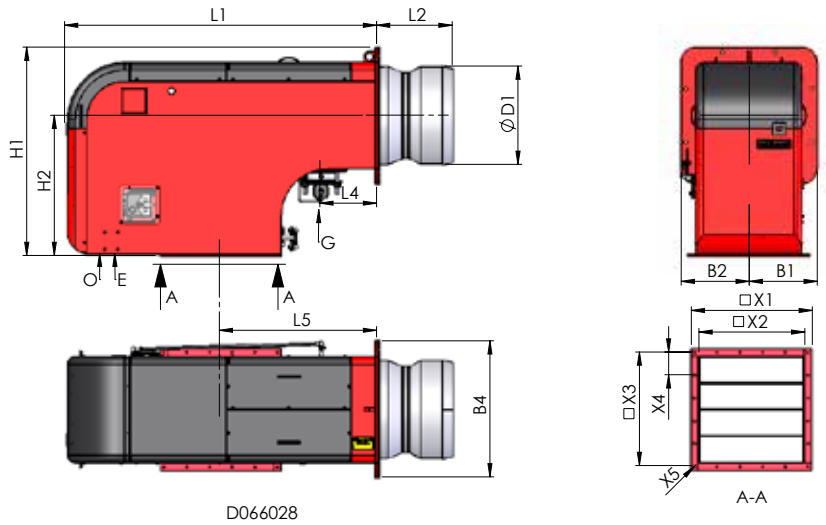

BURNER	L1	L2	L4	L5	H1	H2
800 ME	1650	360	300	832	1100	742
1000 ME	1650	390	300	832	1100	742
1200 ME	1650	400	300	832	1100	742
1600 ME	1917	450	385	1007	1330	852
2000 ME	1917	450	385	1007	1330	852

BURNER	B1	B2	B4	Ø D1	□X1	□X2	□X3	X4	X5
800 ME	360	360	720	422	640	560	600	5 x 120	20 x Ø12
1000 ME	360	360	720	496	640	560	600	5 x 120	20 x Ø12
1200 ME	360	360	720	520	640	560	600	5 x 120	20 x Ø12
1600 ME	480	480	960	594	800	720	750	6 x 125	24 x Ø12
2000 ME	480	480	960	650	800	720	750	6 x 125	24 x Ø12



Dimensions in mm.

Combustion head and masonry dimensions

Mounting plate


GP/GKP/KP/RP/GRP-400...1200 ME

GP/GKP/KP/RP/GRP-1600...2000 ME

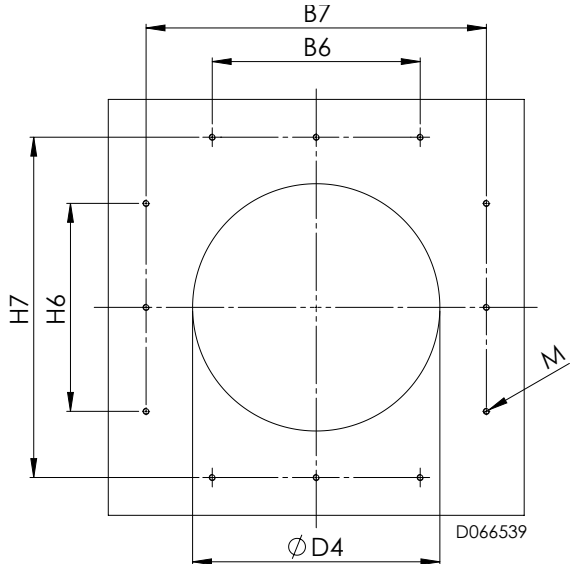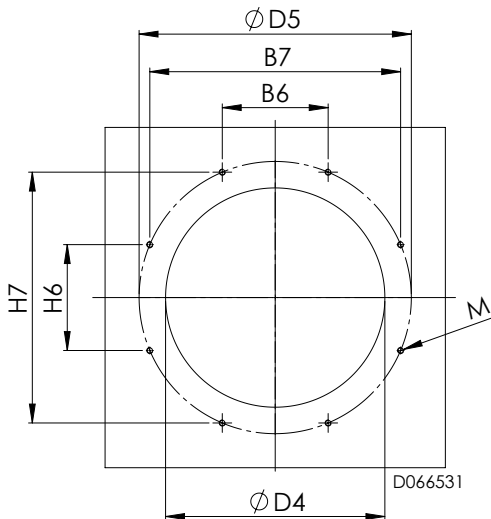

BURNER	B6	B7	H6	H7	ØD4	ØD5	M
400 ME	340	580	340	660	430	—	8xM16
600 ME	340	580	340	660	455	—	8xM16
800 ME	280	—	280	—	482	720	8xM16
1000 ME	280	—	280	—	556	720	8xM16
1200 ME	280	—	280	—	580	720	8xM16
1600 ME	550	900	550	900	654	—	12xM16
2000 ME	550	900	550	900	710	—	12xM16

Burner mounting

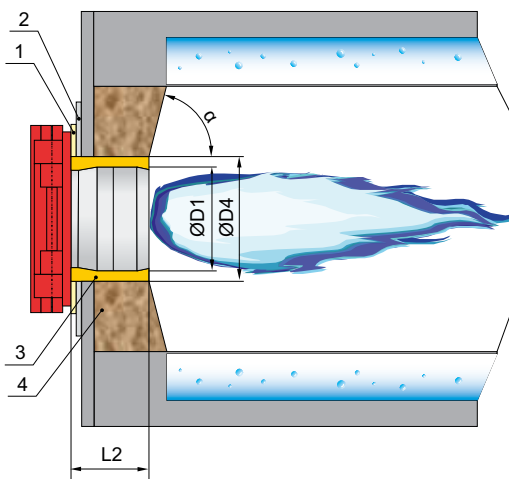


1. Gasket, thickness 8 mm
2. Mounting plate
3. Ceramic wool or similar
4. Masonry

BURNER	L2	ØD1	ØD4	α
400 ME	325	370	430	60° - 90°
600 ME	335	395	455	60° - 90°
800 ME	360	422	482	60° - 90°
1000 ME	390	496	556	60° - 90°
1200 ME	400	520	580	60° - 90°
1600 ME	450	594	654	60° - 90°
2000 ME	450	650	710	60° - 90°

Dimensions in mm.


Flame dimensions

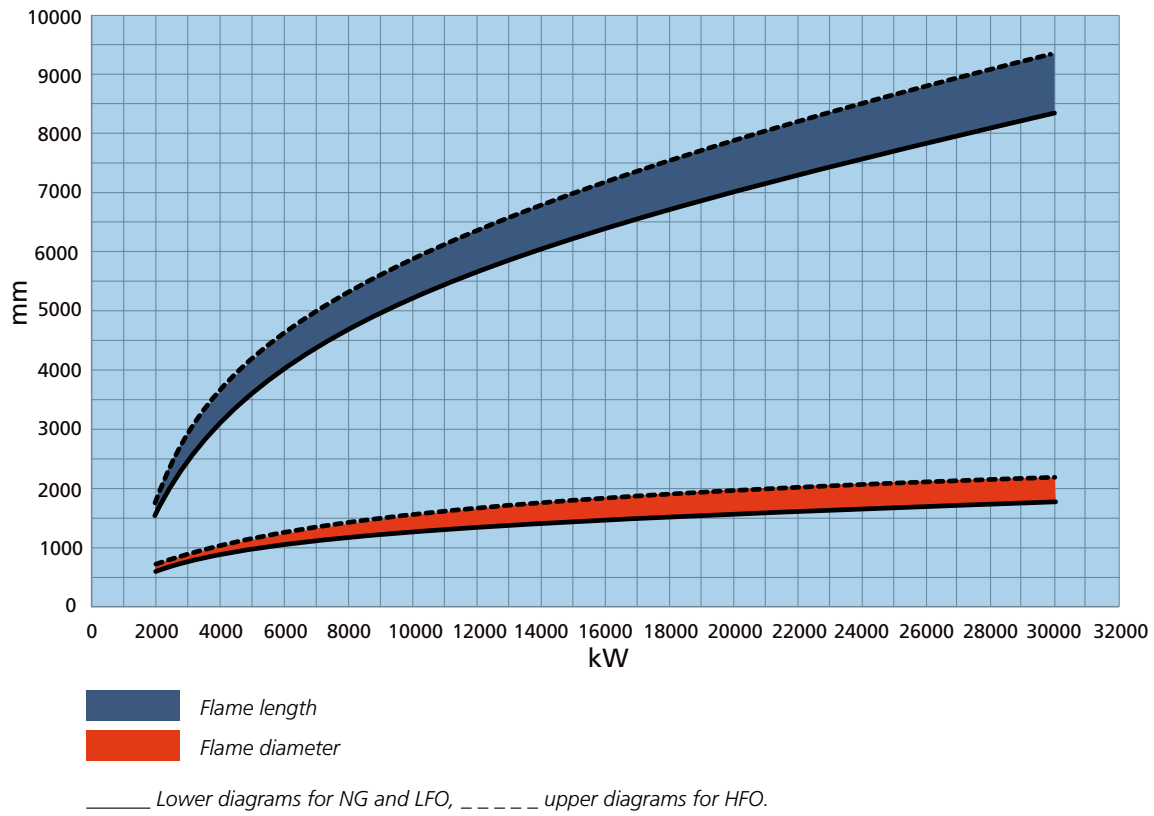

Flame dimensions ME burners

PI diagrams


GAS, DMV VALVE, ME BURNERS

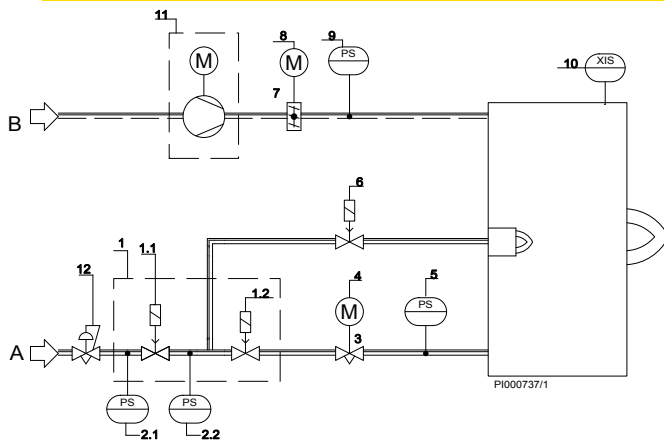

1. Double solenoid valve
 - 1.1 Safety shut-off valve
 - 1.2 Safety shut-off valve
2. Pressure switch
 - 2.1 Pressure switch, low
 - 2.2 Pressure switch
3. Gas control valve
4. Actuator
5. Pressure switch, high
6. Solenoid valve, ignition gas
7. Air damper
8. Actuator
9. Air pressure switch
10. Flame detector
11. Separate combustion air fan, optional
12. Pressure regulator (EN88-1), optional

A = Gas supply
B = Air supply


GAS, VGD VALVE, ME BURNERS

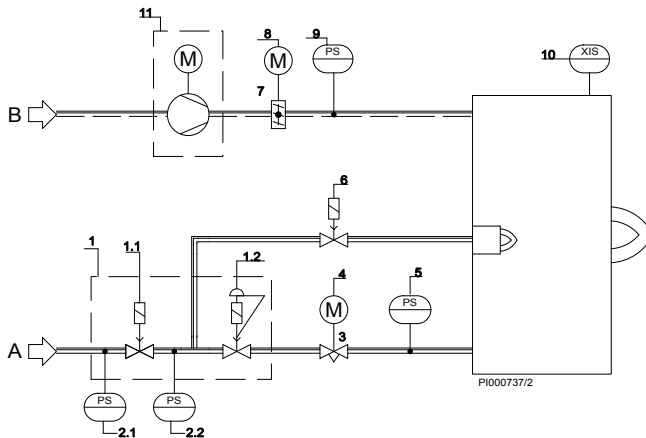

1. Double solenoid valve
 - 1.1 Safety shut-off valve
 - 1.2 Safety shut-off valve
2. Pressure switch
 - 2.1 Pressure switch, low
 - 2.2 Pressure switch
3. Gas control valve
4. Servomotor
5. Pressure switch, high
6. Solenoid valve, ignition gas
7. Air damper
8. Servomotor
9. Air pressure switch
10. Flame detector
11. Separate combustion air fan, optional

A = Gas supply
B = Air supply


LIGHT FUEL OIL, ME BURNERS

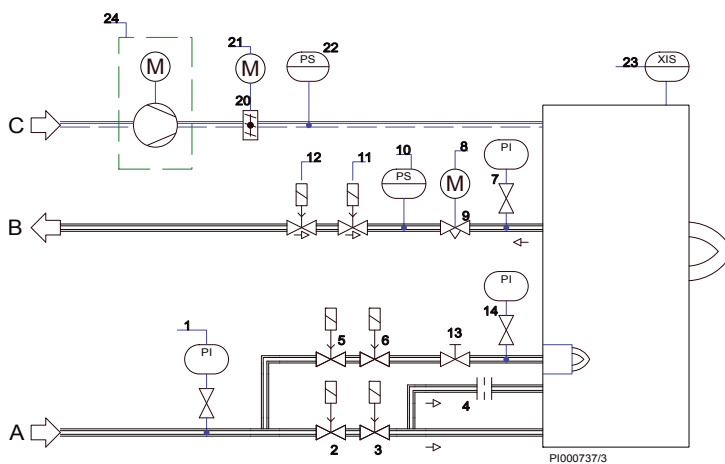

1. Pressure gauge
2. Safety shut-off valve (115 V)
3. Safety shut-off valve (115 V)
4. Throttle plug
5. Solenoid valve, ignition oil, NC
6. Solenoid valve, ignition oil, NC
7. Pressure gauge
8. Actuator
9. Oil control valve
10. Pressure switch
11. Solenoid valve, NC (115 V)
12. Solenoid valve, NC (115 V)
13. Needle valve
14. Pressure gauge
20. Air damper
21. Actuator
22. Air pressure switch
23. Flame detector
24. Separate combustion air fan, optional

A = Oil supply
B = Oil return
C = Air supply

HEAVY FUEL OIL, ME BURNERS

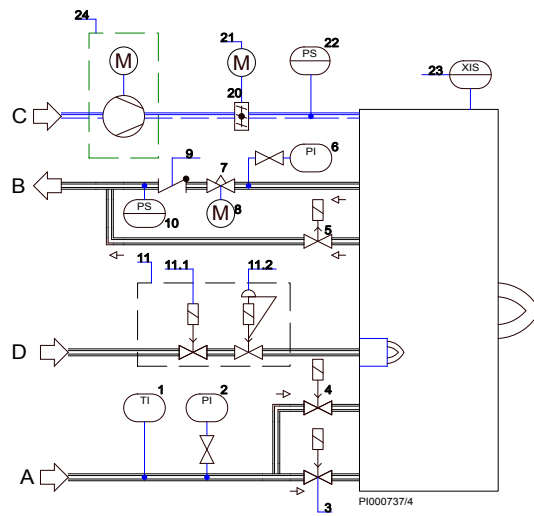

1. Thermometer
2. Pressure gauge
3. Solenoid valve, NC
4. Solenoid valve, NC
5. Solenoid valve, NO
6. Pressure gauge
7. Oil control valve
8. Actuator
9. Non-return valve
10. Pressure switch, max.
11. Double solenoid valve
 - 11.1 Safety shut-off valve
 - 11.2 Safety shut-off valve
20. Air damper
21. Actuator
22. Pressure switch, air
23. Flame detector
24. Separate combustion air fan, optional

A = Oil supply
 B = Oil return
 C = Air supply
 D = LPG supply

Gas valves

BURNER	GAS VALVE		BURNER MAX. CAPACITY, kW **			
	SIZE DN	TYPE*	GAS INLET PRESSURE, mbar			
			100	150	200	250
GP/GKP/GRP-400 ME	50	DMV-D5050/11	3100	3900	4600	5000
	65	DMV-5065/11	4700	5000	5000	5000
GP/GKP/GRP-600 ME	65	DMV-5065/11	4700	5900	6800	6800
	80	DMV-5080/11	6800	6800	6800	6800
GP/GKP/GRP-800 ME	80	DMV-5080/11	7400	9200	9500	9500
	100	DMV-5100/11	9500	9500	9500	9500
GP/GKP/GRP-1000 ME	80	DMV-5080/11	7800	9700	11400	12000
	100	DMV-5100/11	10300	12000	12000	12000
	125	DMV-5125/11	12000	12000	12000	12000
GP/GKP/GRP-1200 ME	100	DMV-5100/11	10300	12900	14000	14000
	125	DMV-5125/11	14000	14000	14000	14000
GP/GKP/GRP-1600 ME	100	DMV-5100/11	9300	11600	13700	15600
	125	DMV-5125/11	12200	15300	16500	16500
GP/GKP/GRP-2000 ME	125	DMV-5125/11	11900	14900	17500	20000
GP/GKP/GRP-400 ME	50	VGD40.050	3800	4800	5000	5000
	65	VGD40.065	5000	5000	5000	5000
GP/GKP/GRP-600 ME	65	VGD40.065	5900	6800	6800	6800
	80	VGD40.080	6800	6800	6800	6800
GP/GKP/GRP-800 ME	65	VGD40.065	6200	7700	9100	9500
	80	VGD40.080	8500	9500	9500	9500
	100	VGD40.100	9500	9500	9500	9500
GP/GKP/GRP-1000 ME	80	VGD40.080	9200	11500	12000	12000
	100	VGD40.100	12000	12000	12000	12000
	125	VGD40.125	12000	12000	12000	12000
GP/GKP/GRP-1200 ME	80	VGD40.080	9200	11500	13500	14000
	100	VGD40.100	12800	14000	14000	14000
	125	VGD40.125	14000	14000	14000	14000
GP/GKP/GRP-1600 ME	100	VGD40.100	11100	13800	16200	16500
	125	VGD40.125	13100	16400	16500	16500
GP/GKP/GRP-2000 ME	125	VGD40.125	12700	15900	18700	21300
	150	VGD40.150	13500	16800	20000	22500

NOTE! The max. capacities shown in the table are achieved when the boiler back pressure is 0.


Natural gas 1m³ n/h \cong 10 kW

* or corresponding type

** Gas inlet pressure (Pmax) at burner

- max. 500 mbar when using DMV-(D) valve

Gas elbow

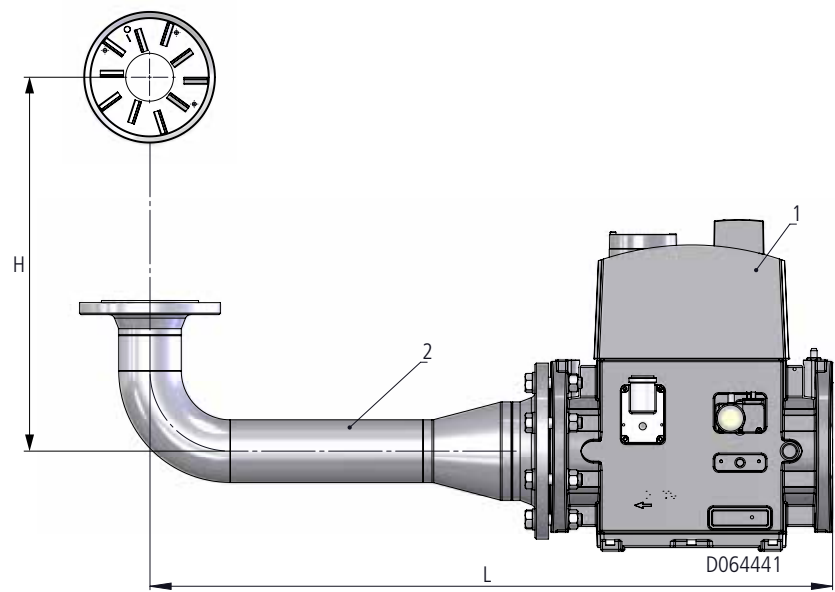

- 1. Gas valve
- 2. Gas elbow

	GAS ELBOW DIMENSIONS WITH DIFFERENT VALVES					
		DN50	DN65	DN80	DN100	DN125
	H	L	L	L	L	L
GP/GKP/GRP-400/600 ME	535	635	690	710	750	–
GP/GKP/GRP-800 ME	663	–	805	730	772	825
GP/GKP/GRP-1000...1200 ME	620	–	805	730	772	825
GP/GKP/GRP-1600...2000 ME	700	–	–	–	772	825

Other dimensions available on request.

Dimensions in mm.

Scope of delivery GP/GKP/KP/RP/GRP-400...-2000 ME

	GP-... ME	GKP-... ME	KP-... ME	RP-... ME	GRP-... ME
Burner flange gasket	•	•	•	•	•
Ignition transformer	•	•	•	•	•
Ignition cables and electrodes	•	•	•	•	•
Flame sensor	•	•	•	•	•
WiseDrive (electronic ratio control) for regulating the air/gas ratio, incl.: - gas butterfly valve - actuator for gas butterfly valve - actuator for air dampers - actuator for combustion head regulation	•	–	–	–	–
WiseDrive (electronic ratio control) for regulating the air/oil/gas ratio, incl.: - oil regulator - gas butterfly valve - actuators for oil regulator and gas butterfly valve - actuator for air dampers - actuator for combustion head regulation	–	•	–	–	•
WiseDrive (electronic ratio control) for regulating the air/oil ratio, incl.: - oil regulator - actuator for oil regulator - actuator for air dampers - actuator for combustion head regulation	–	–	•	•	–
Air pressure switch	•	•	•	•	•
Gas nozzle	•	•	–	–	•
Gas pressure switch, max.	•	•	–	–	•
Gas elbow 90°	•	•	–	–	•
Double solenoid valve for gas incl.: - gas pressure switch, min. - 2 gas valves	– •	– •	– –	– –	– •
Solenoid valve for ignition gas (NG)	•	•	–	–	•
Solenoid valves for ignition gas (LPG)	–	–	–	•	•
Oil nozzle	–	•	•	•	•
Solenoid valves for oil	–	•	•	•	•
Non-return valve	–	•	•	•	•
2 pressure gauges for oil	–	•	•	•	•
Pressure switch for return oil	–	•	•	•	•
Solenoid valves for light fuel oil ignition (LFO)	–	•	•	–	–
Heating cartridge for oil nozzle	–	–	–	•	•
Heating cartridge for oil nozzle valve	–	–	–	•	•
Heating cartridge for solenoid valves	–	–	–	•	•
Thermometer	–	–	–	•	•
Operation and maintenance manual	•	•	•	•	•

• Standard

Burner options, GP/GKP/KP/RP/GRP-400...-2000 ME

	GP-... ME	GKP-... ME	KP-... ME	RP-... ME	GRP-... ME
FGR equipment	o	o	o	o	o
Pressure gauge for fan pressure	o	o	o	o	o
Pressure gauge for measuring the pressure in gas nozzle	o	o	–	–	o
Thermometer	–	o	o	–	–
Electric tracing cables for burner oil pipes	–	–	–	o	o

o Accessories




Oilon ACE

0.8 - 90 MW

Oilon ACE represents the latest in low emission technology. Typical NO_x emissions are less than 60 mg/nm³, ref. 3% O₂ and less than 30 mg/nm³ with external Flue Gas Recirculation (FGR). Thanks to efficient combustion, CO emissions remain low. Oilon ACE burners are primarily used in water tube and fire tube boilers, but they are also well suited for a variety of other applications.

Type labeling, Oilon ACE

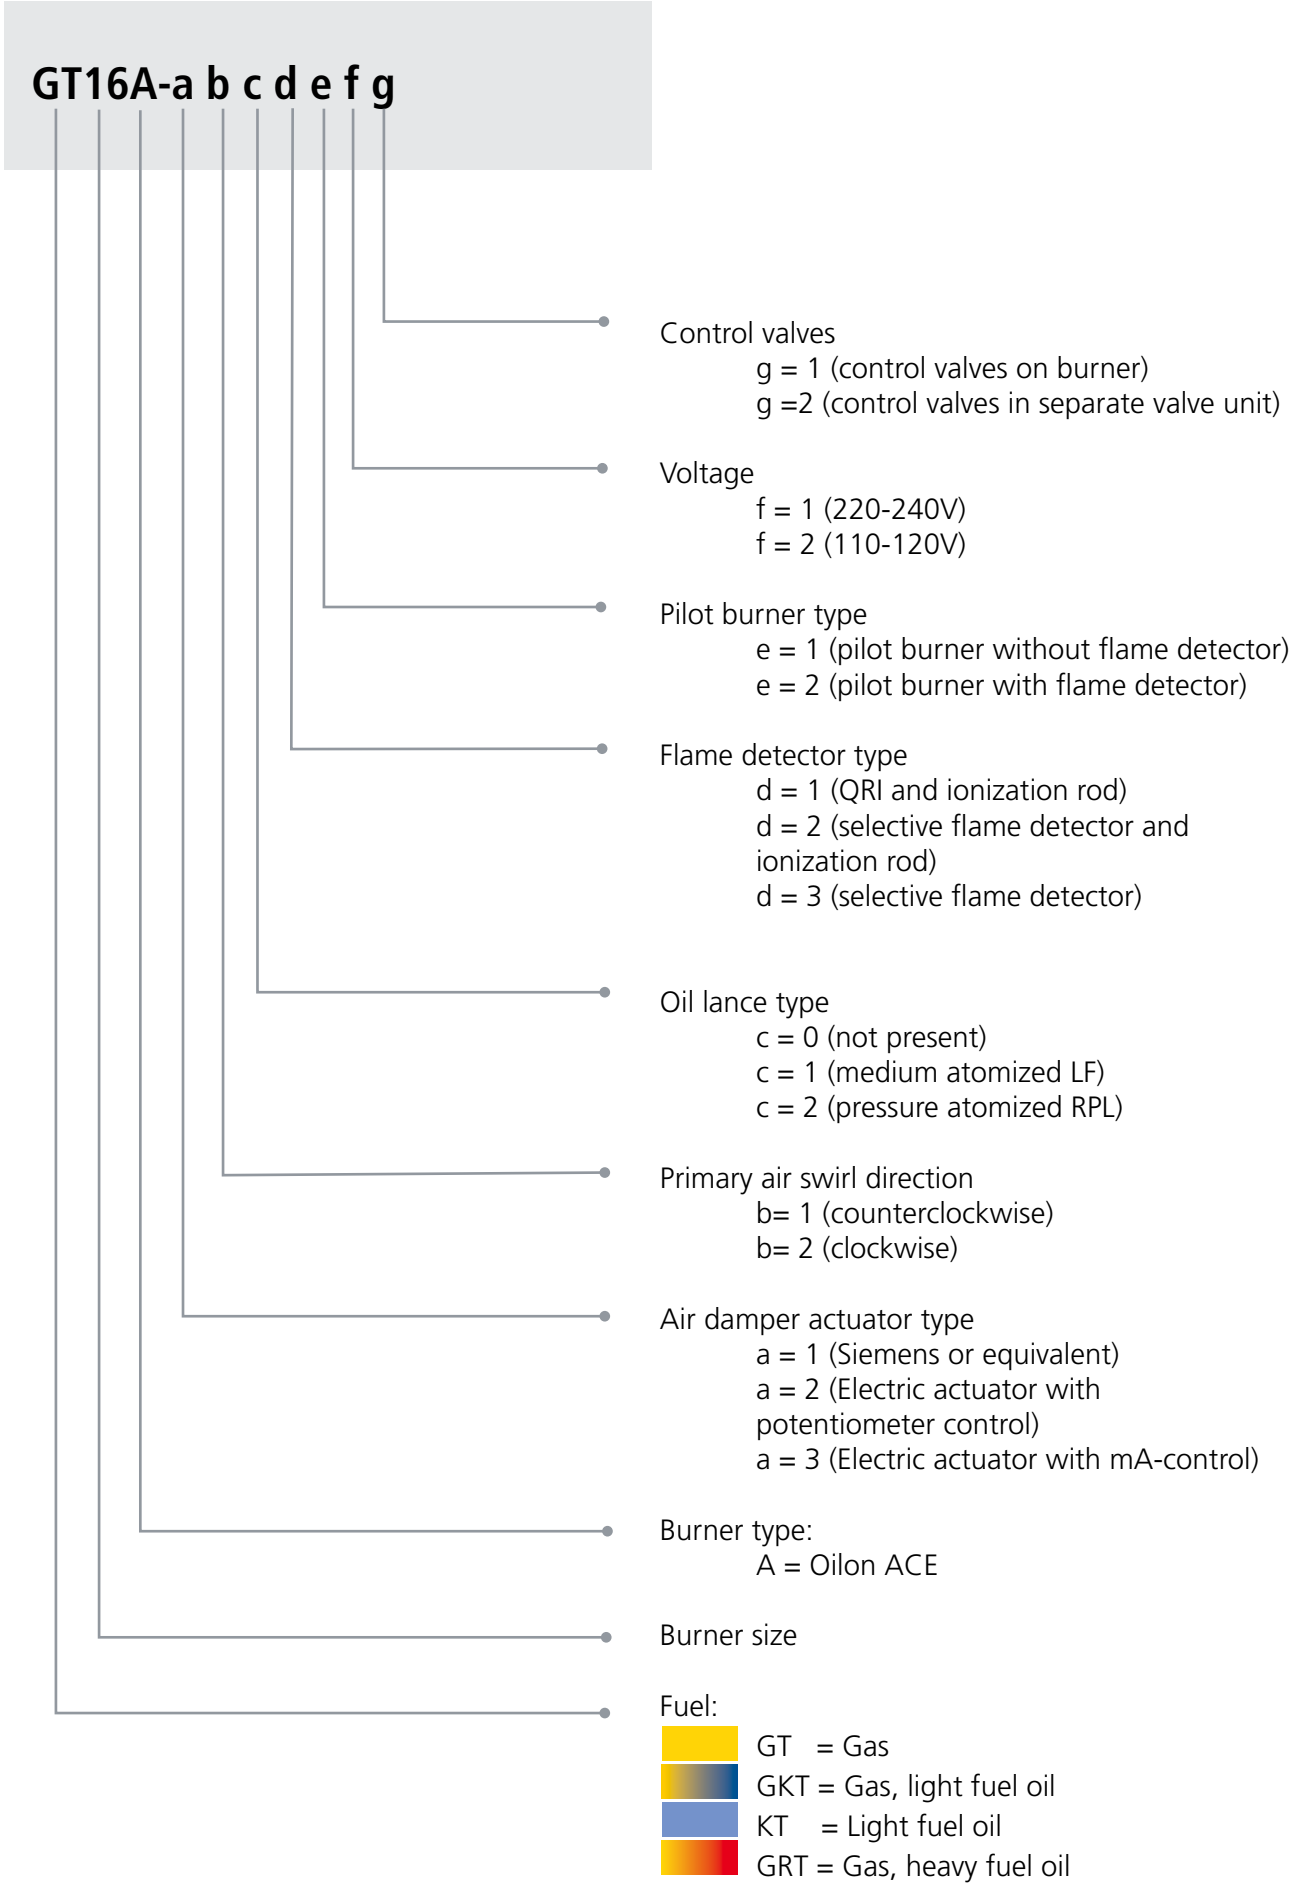

GT/GKT/KT/GRT-6A...90A, Oilon ACE

Technical Data, Oilon ACE (Oilon standard solution)

BURNER	GT-6A	GT-8A	GT-10A	GT-13A	GT-16A	GT-19A	GT-23A
Capacity,* MW	0.8 - 6.5	1.0 - 8.0	1.3 - 10.0	1.6 - 13.0	2.0 - 16.0	2.4 - 19.0	2.9 - 23.0
Connections – gas, burner	DN65	DN80	DN80	DN100	DN100	DN125	DN125
Pilot burner	NG						
Control unit	WD200						
Weight, kg	330	340	490	510	680	710	1150

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

BURNER	GT-28A	GT-35A	GT-42A	GT-50A	GT-70A	GT-90A
Capacity,* MW	3.5 - 28.0	4.4 - 35.0	5.3 - 42.0	6.3 - 50.0	8.8 - 70.0	11.3 - 90.0
Connections – gas, burner	DN150+DN80	DN150+DN80	DN200+DN100	DN200+DN100	DN250+DN125	DN250+DN125
Pilot burner	GPB20					
Control unit	WD200 **					
Weight, kg	1090	1140	2110	2200	2360	2510

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

**Other burner control systems are also available, such as WD1000 or WD2000.

BURNER	GKT-6A	GKT-8A	GKT-10A	GKT-13A	GKT-16A	GKT-19A	GKT-23A
Capacity,* MW – gas – oil	0.8 - 6.5 2.6 - 6.5	1.0 - 8.0 3.2 - 8.0	1.3 - 10.0 4.0 - 10.0	1.6 - 13.0 5.2 - 13.0	2.0 - 16.0 6.4 - 16.0	2.4 - 19.0 7.6 - 19.0	2.9 - 23.0 9.2 - 23.0
Connections – gas, burner – oil, burner	DN65 R3/4"	DN80 R3/4"	DN80 R3/4"	DN100 R3/4"	DN100 R3/4"	DN125 R3/4"	DN125 R3/4"
Pilot burner	GPB20						
Atomizing meth- od, liquid fuel	Pressure atomizing						
Control unit	WD200						
Weight, kg	420	430	580	610	780	810	1250

*Gas capacity range with VSD. Without VSD, the turndown ratio is 1:5.

Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

BURNER	GKT-28A	GKT-35A	GKT-42A	GKT-50A	GKT-70A	GKT-90A
Capacity,* MW – gas – oil	3.5 - 28.0 5.6 - 28.0	4.4 - 35.0 7.0 - 35.0	5.3 - 42.0 8.4 - 42.0	6.3 - 50.0 10.0 - 50.0	8.8 - 70.0 ***	11.3 - 90.0 ***
Connections – gas, burner – oil, burner	DN150+DN80 G1"	DN150+DN80 G1"	DN200+DN100 G1"	DN200+DN100 G1"	DN250+DN125 G1"	DN250+DN125 G1"
Pilot burner	GPB20					
Atomizing method, liquid fuel	Air atomizing					
Control unit	WD1000**					
Weight, kg	1110	1160	2130	2230	2390	2550

*Gas capacity range with VSD. Without VSD, the turndown ratio is 1:5.

Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD2000.

***Confirm the capacity from Oilon Selection Tool.

BURNER	KT-6A	KT-8A	KT-10A	KT-13A	KT-16A	KT-19A	KT-23A
Capacity,* MW	2.6 - 6.5	3.2 - 8.0	4.0 - 10.0	5.2 - 13.0	6.4 - 16.0	7.6 - 19.0	9.2 - 23.0
Connections – oil	R3/4"	R3/4"	R3/4"	R3/4"	R3/4"	R3/4"	R3/4"
Pilot burner	GPB20						
Atomizing method, liquid fuel	Pressure atomizing						
Control unit	WD200						
Weight, kg	280	290	440	450	610	640	1050

*Gas capacity range with VSD. Without VSD, the turndown ratio is 1:5.

Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

BURNER	KT-28A	KT-35A	KT-42A	KT-50A	KT-70A	KT-90A
Capacity,* MW	5.6 - 28.0	7.0 - 35.0	8.4 - 42.0	10.0 - 50.0	***	***
Connections – oil	G1"	G1"	G1"	G1"	G1"	G1"
Pilot burner	GPB20					
Atomizing method Liquid fuel	Air atomizing					
Control unit	WD1000**					
Weight, kg	820	860	1750	1850	1990	2150

*Gas capacity range with VSD. Without VSD, the turndown ratio is 1:5.

Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD2000.

***Confirm the capacity from Oilon Selection Tool.

BURNER	GRT-6A	GRT-8A	GRT-10A	GRT-13A	GRT-16A	GRT-19A	GRT-23A
Capacity,* MW – gas – oil	0.8 - 6.5 1.3 - 6.5	1.0 - 8.0 1.6 - 8.0	1.3 - 10.0 2.0 - 10.0	1.6 - 13.0 2.6 - 13.0	2.0 - 16.0 3.2 - 16.0	2.4 - 19.0 3.8 - 19.0	2.9 - 23.0 4.6 - 23.0
Connections – gas, burner – oil, burner	DN65 R3/4"	DN80 R3/4"	DN80 R3/4"	DN100 R3/4"	DN100 R3/4"	DN125 R3/4"	DN125 R3/4"
Pilot burner	GPB20						
Atomizing method, liquid fuel	Steam/air atomizing						
Control unit	WD1000***						
Weight, kg	420	430	580	610	780	810	1250

***Can be delivered with WD2000.

BURNER	GRT-28A	GRT-35A	GRT-42A	GRT-50A	GRT-70A	GRT-90A
Capacity,* MW – gas – oil	3.5 - 28.0 5.6 - 28.0	4.4 - 35.0 7.0 - 35.0	5.3 - 42.0 8.4 - 42.0	6.3 - 50.0 ****	8.8 - 70.0 ****	11.3 - 90.0 ****
Connections – gas, burner – oil, burner	DN150+DN80 G1"	DN150+DN80 G1"	DN200+DN100 G1"	DN200+DN100 G1"	DN250+DN125 G1"	DN250+DN125 G1"
Pilot burner	GPB20					
Atomizing method, liquid fuel	Steam/air atomizing					
Control unit	WD1000***					
Weight, kg	1110	1160	2130	2230	2390	2550



***Can be delivered with WD2000.

****Confirm the capacity from Oilon Selection Tool.

*Gas capacity range with VSD. Without VSD, the turndown ratio is 1:5.

Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

Dimensions, Oilon ACE

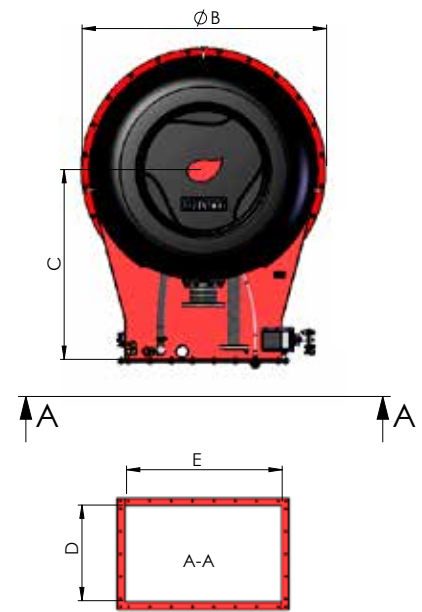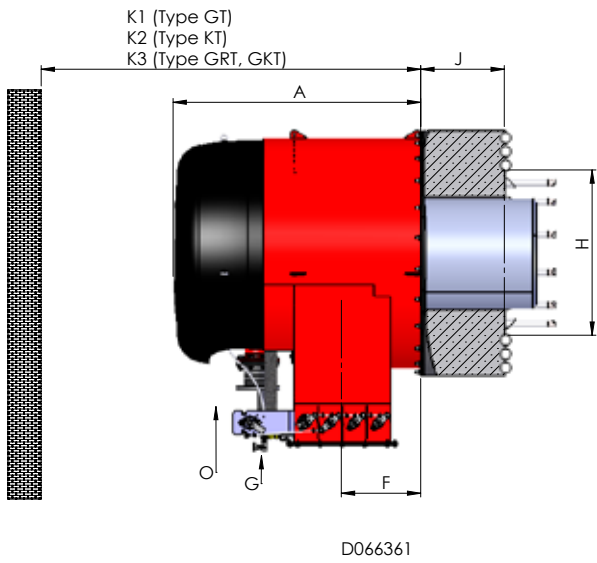

G = Gas inlet
O = Oil inlet/return


BURNER	A	ØB	C	D	E	F	J	H	K1	K2	K3
GT/KT/GRT/GKT-6A	1055	860	780	310	500	285	310	502	1900	2600	2600
GT/KT/GRT/GKT-8A	1055	860	780	310	500	285	340	591	1900	2600	2600
GT/KT/GRT/GKT-10A	1250	1020	856	395	625	317	360	613	2100	2800	2800
GT/KT/GRT/GKT-13A	1250	1020	856	395	625	317	400	685	2100	2800	2800
GT/KT/GRT/GKT-16A	1410	1210	990	470	750	386	420	765	2400	3100	3100
GT/KT/GRT/GKT-19A	1410	1210	990	470	750	386	440	823	2400	3100	3100
GT/KT/GRT/GKT-23A	1630	1610	1250	630	1025	525	475	907	3000	3700	3700
GT/KT/GRT/GKT-28A	1630	1610	1250	630	1025	525	500	988	3000	3700	3700
GT/KT/GRT/GKT-35A	1630	1610	1250	630	1025	525	550	1089	3000	3700	3700
GT/KT/GRT/GKT-42A	2170	2235	1660	950	1450	755	600	1206	4000	4900	4900
GT/KT/GRT/GKT-50A	2170	2235	1660	950	1450	755	700	1302	4000	4900	4900
GT/KT/GRT/GKT-70A	2170	2235	1660	950	1450	755	750	1512	4000	4900	4900
GT/KT/GRT/GKT-90A	2170	2235	1660	950	1450	755	750	1700	4000	4900	4900

Dimensions in mm.


Boiler wall masonry, burner mounting

Oilon ACE

Alternative A

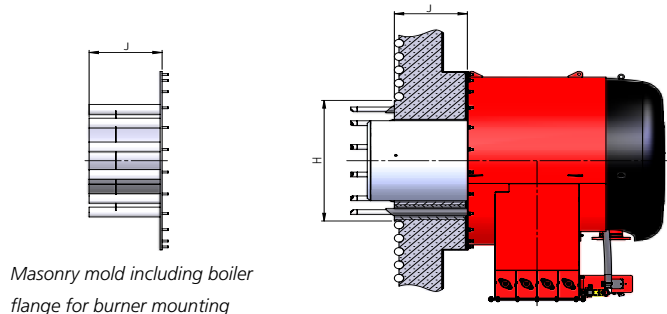

Alternative B

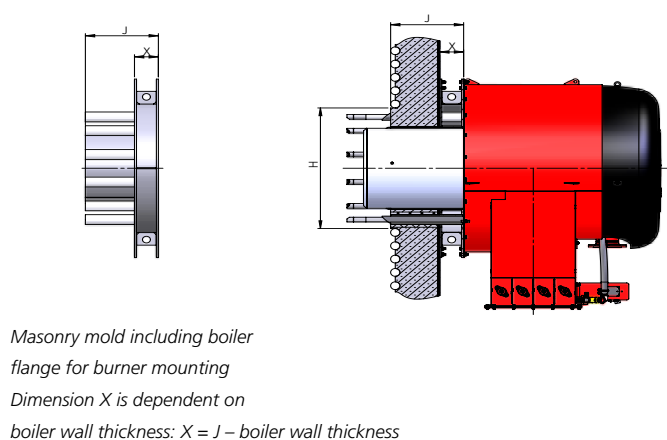


The drawing of selected masonry mold alternative will be provided by Oilon.
The mold itself is an optional part.

34

Flame dimensions, Oilon ACE


Estimated flame dimensions for NG, LFO and HFO

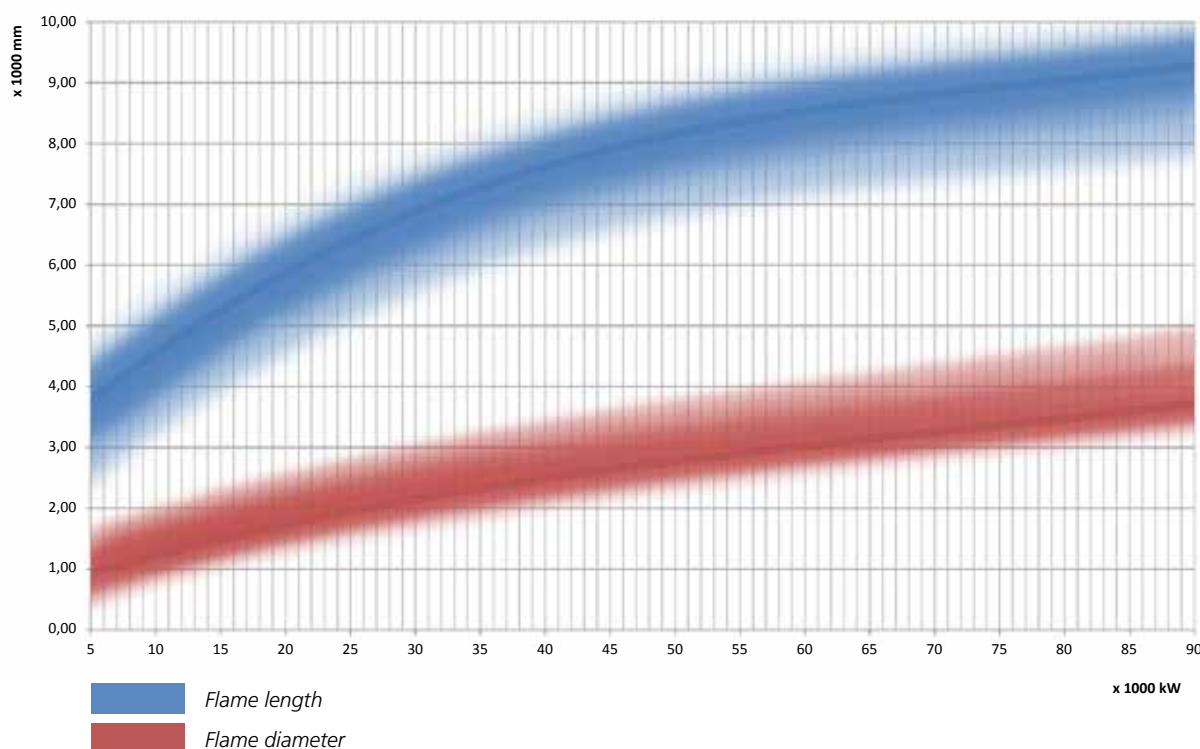

Note: flame dimensions are dependent on the furnace dimensions and burner adjustments.

PI diagrams, Oilon ACE

GAS, Oilon ACE, 6A...23A

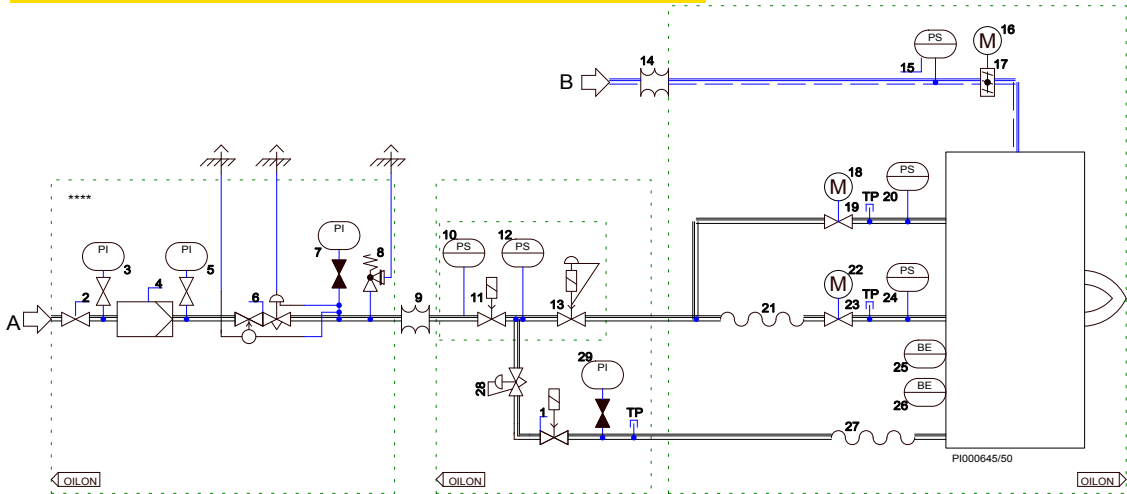

1. Solenoid valve, NC
2. Manual shut-off valve
3. Pressure gauge
4. Gas filter
5. Pressure gauge
6. Pressure regulator with safety shut-off
7. Pressure gauge
8. Safety relief valve
9. Bellow***
10. Pressure switch / low
11. Solenoid valve, NC
12. Pressure switch / low & high
13. Pressure regulation valve, NC
14. Bellow***
15. Pressure switch, low
16. Actuator

17. Combustion air damper
18. Actuator
19. Gas control valve
20. Pressure switch, high
21. Flexible hose
22. Actuator
23. Gas control valve
24. Pressure switch, high
25. Flame detector
26. Flame detector
27. Flexible hose
28. Pressure regulator
29. Pressure gauge


A = Gas supply
B = Air supply

TP = Test point. In standard solution, integrated in the pressure switch

***Necessary part. Not included in Oilon delivery.

****not included in standard delivery.

GAS, Oilon ACE, 28A...90A

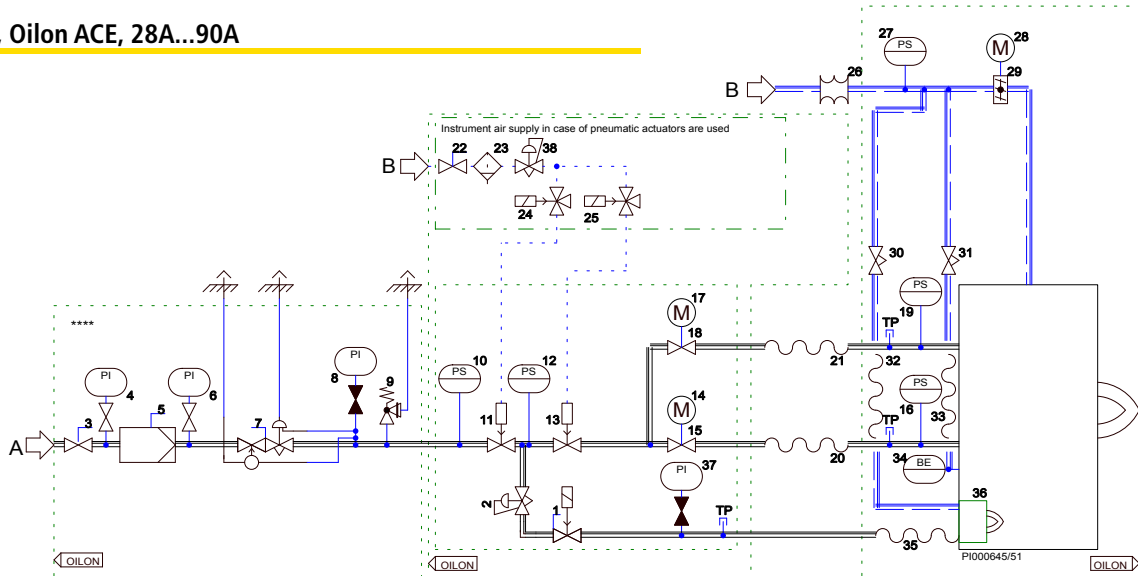

1. Solenoid valve, NC
2. Pressure regulator
3. Manual shut-off valve
4. Pressure gauge
5. Gas filter
6. Pressure gauge
7. Pressure regulator with safety shut-off
8. Pressure gauge
9. Safety relief valve
10. Pressure switch, low
11. Solenoid valve, NC
12. Pressure switch, low and high
13. Pressure regulating valve, NC
14. Actuator
15. Gas control valve
16. Pressure switch, high
17. Actuator
18. Gas control valve
19. Pressure switch, high
20. Flexible hose*
21. Flexible hose*
22. Manual shut-off valve***
23. Air filter**
24. Solenoid valve**
25. Solenoid valve**
26. Bellow*
27. Pressure switch, low
28. Actuator
29. Combustion air damper
30. Needle valve
31. Needle valve
32. Flexible hose
33. Flexible hose
34. Flame detector
35. Flexible hose
36. Pilot burner with flame detector
37. Pressure gauge
38. Pressure regulator**

A = Gas supply
B = Air supply


TP = Test point. In standard solution, integrated in the pressure switch

*Necessary part. Not included in Oilon delivery.

**Instrument air components in case pneumatic actuators are used

***not included in standard delivery.

GAS/LIGHT OIL, Oilon ACE 6A...23A

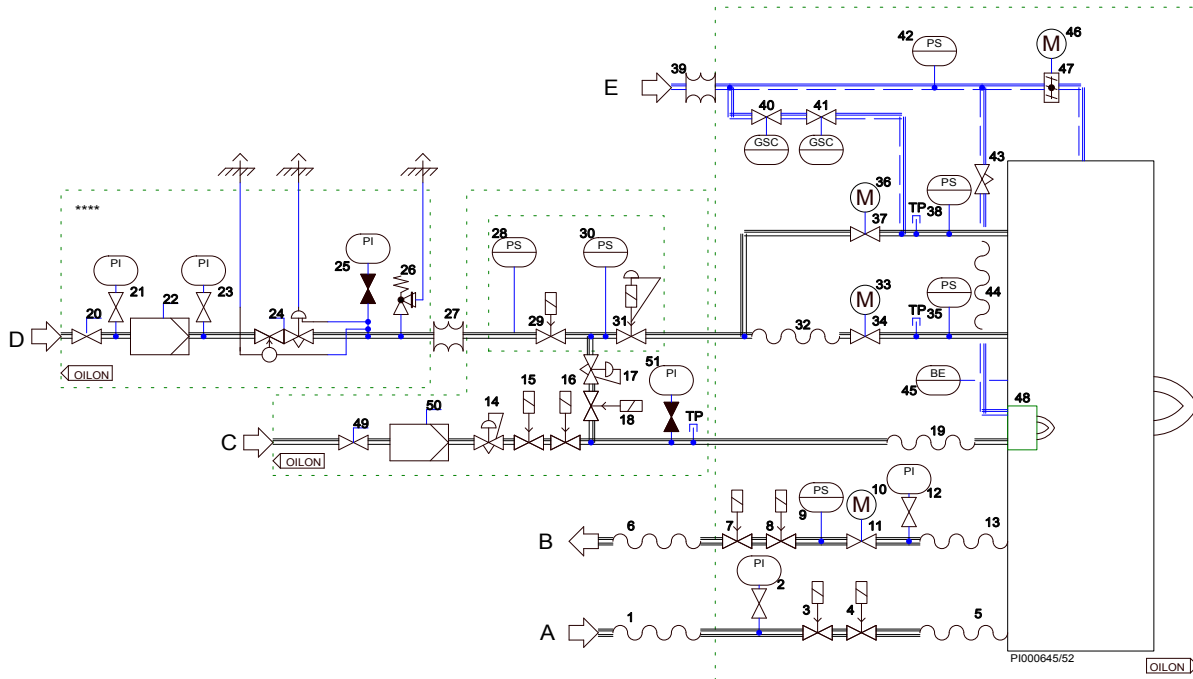

1. Flexible hose ***
2. Pressure gauge
3. Safety shut-off valve (115 V)
4. Safety shut-off valve (115 V)
5. Flexible hose
6. Flexible hose***
7. Solenoid valve (115 V)
8. Solenoid valve (115 V)
9. Pressure switch, high
10. Actuator
11. Oil control valve
12. Pressure gauge
13. Flexible hose
14. Pressure regulation valve
15. Solenoid valve, NC
16. Solenoid valve, NC
17. Pressure regulation valve
18. Solenoid valve, NC
19. Flexible hose

20. Manual shut-off valve
21. Pressure gauge
22. Gas filter
23. Pressure gauge
24. Pressure regulator with safety shut-off
25. Pressure gauge
26. Safety relief valve
27. Bellow***
28. Pressure switch, low
29. Safety shut-off valve
30. Pressure switch, low and high
31. Safety shut-off valve
32. Flexible hose
33. Actuator
34. Gas control valve
35. Pressure switch, high
36. Actuator


37. Gas control valve
38. Pressure switch, high
39. Bellow***
40. Cooling air valve
41. Cooling air valve
42. Pressure switch, low
43. Needle valve
44. Flexible hose
45. Flame detector
46. Actuator
47. Combustion air damper
48. Pilot burner with flame detector
49. Manual shut-off valve, optional
50. Gas filter
51. Pressure gauge

- A = Oil supply
B = Oil return
C = LPG
D = Natural gas
E = Air supply

TP = Test point. In standard solution, integrated in the pressure switch

***Necessary part. Not included in Oilon delivery.
****not included in standard delivery.

GAS/LIGHT OIL, Oilon ACE 28A...90A
GAS/HEAVY OIL, Oilon ACE 6A...90A

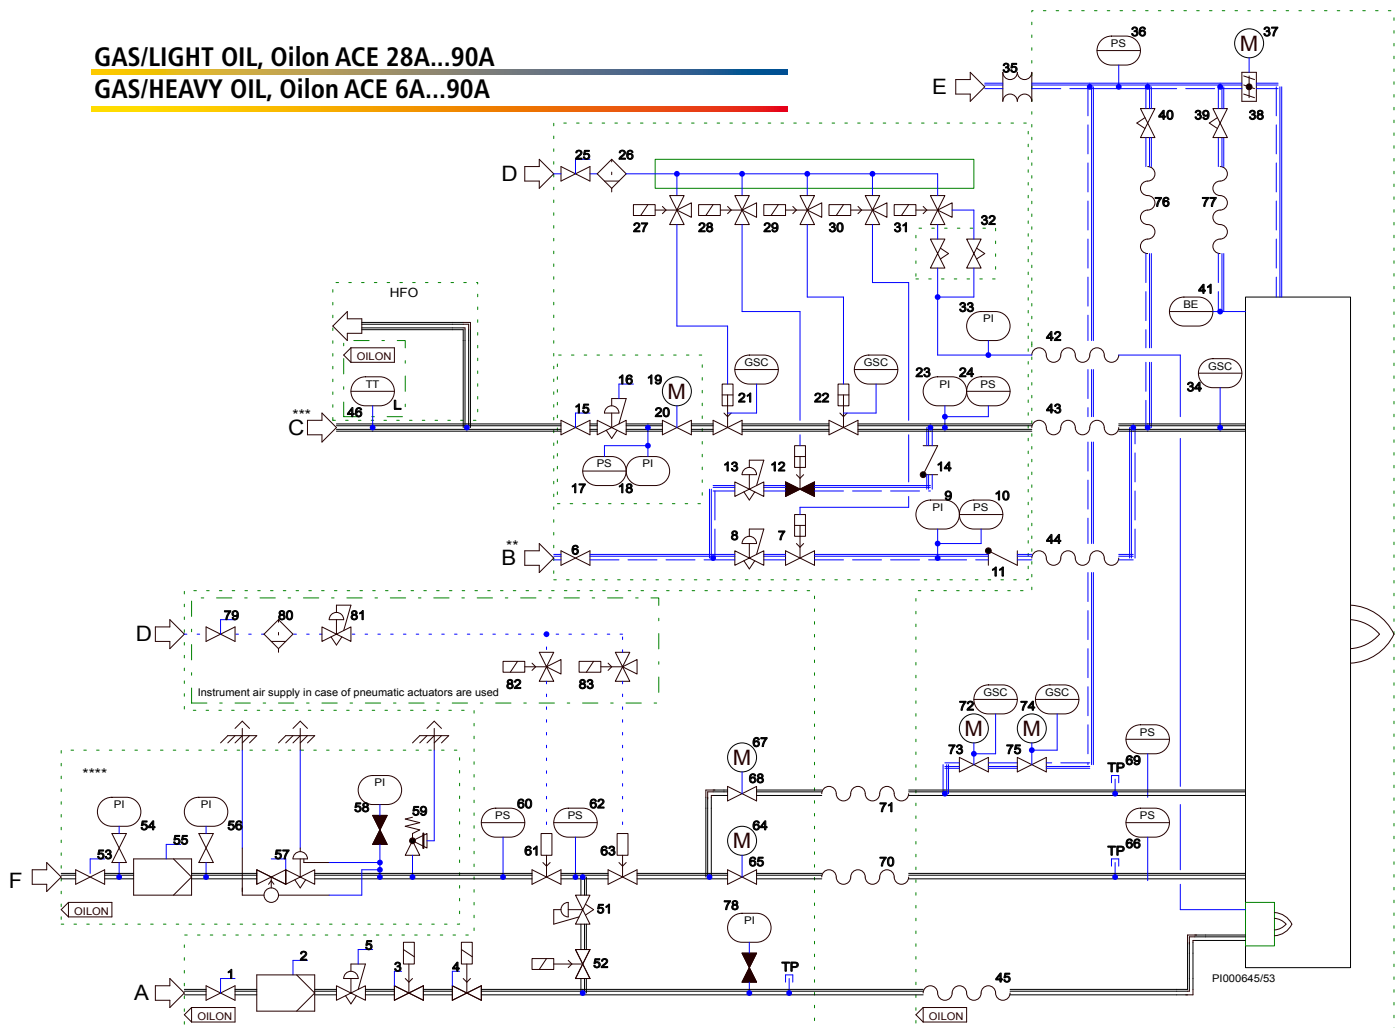

1. Manual shut-off valve
2. Gas filter
3. Solenoid valve, NC
4. Solenoid valve, NC
5. Pressure regulator
6. Manual shut-off valve
7. Shut-off valve, NC
8. Manual control valve
9. Pressure gauge
10. Pressure switch, low
11. Non-return valve
12. Shut-off valve, NC
13. Manual control valve
14. Non-return valve
15. Manual shut-off valve
16. Pressure regulator
17. Pressure switch, high
18. Pressure gauge
19. Actuator
20. Oil control valve
21. Safety shut-off valve
22. Safety shut-off valve
23. Pressure gauge
24. Pressure switch, high
25. Manual shut-off valve
26. Air filter
27. Solenoid valve
28. Solenoid valve
29. Solenoid valve
30. Solenoid valve
31. Solenoid valve
32. Manual control valve
33. Pressure gauge

34. Limit switch
35. Bellow*
36. Pressure switch, low
37. Actuator
38. Combustion air damper
39. Needle valve
40. Needle valve
41. Flame detector
42. Flexible hose
43. Flexible hose
44. Flexible hose
45. Flexible hose
46. Temperature transmitter, low (optional)
51. Pressure regulator
52. Solenoid valve, NC
53. Manual shut-off valve
54. Pressure gauge
55. Gas filter
56. Pressure gauge
57. Pressure regulator with safety shut-off
58. Pressure gauge
59. Safety relief valve
60. Pressure switch, low
61. Safety shut-off valve
62. Pressure switch, low and high
63. Safety shut-off valve
64. Actuator
65. Gas control valve
66. Pressure switch, high
67. Actuator
68. Gas control valve
69. Pressure switch, high
70. Flexible hose*

71. Flexible hose*
72. Actuator
73. Cooling air valve
74. Actuator
75. Cooling air valve
76. Flexible hose
77. Flexible hose
78. Pressure gauge
79. Manual shut-off valve
80. Air filter
81. Pressure regulator
82. Solenoid valve
83. Solenoid valve

A = Ignition gas
 B = Atomizing medium
 C = Heavy fuel oil
 D = Instrument air
 E = Combustion air
 F = Gas

TP = Test point. In standard solution, integrated in the pressure switch

*Necessary part. Not included in Oilon delivery.

** = Insulation of atomizing steam line. Not in Oilon delivery.

*** = Trace heating and insulation of oil line. Not in Oilon delivery.

****not included in standard delivery.

Scope of delivery Oilon ACE GT-6A...90 A, GKT/KT-6A...23A

	GT	GKT	KT
WiseDrive (electronic ratio control) *** for regulating the air/oil/gas ratio, incl.:			
– Oil regulator+actuator	–	•	•
– Gas butterfly valve+actuator	•	•	–
– Air dampers+actuator	•	•	•
Pressure switch, combustion air	•	•	•
Main flame detector, self checking	•	•	•
Gas pilot burner with integrated transformer	•	•	–
Sight glass	•	•	•
Air duct counter flange	•	•	•
Gasket, boiler/burner connection	•	•	•
Gasket, air duct/burner connection	•	•	•
Integrated cooling air supply for components*	•	•	•
Steel hose, ignition gas	•	•	–
Steel hose, liquid fuel**	–	•	•
Pressure switch for return oil	–	•	•
Operation and maintenance manual	•	•	•

• Standard

*possible when combustion air temperature is < 50 °C

**In liquid fuel burners

***Check the price for a separate control panel (WDx00) from the Accessories section.

Options, Oilon ACE GT-6A...90 A, GKT/KT-6A...23A

	GT/ GKT	KT
FGR: *		
DN200	o	o
DN250	o	o
DN300	o	o
DN350	o	o
DN400	o	o
DN500	o	o
DN600	o	o
Steel hose, main gas:		
DN80	o	–
DN100	o	–
DN125	o	–
DN150	o	–

o Option

*The scope of an FGR kit, loose delivery:

- Flue gas control with servomotor
- Extra air damper with servomotor for regulating combustion air vs. flue gas

Scope of delivery, Oilon ACE GKT/KT-28A...90A, GRT-6A...90A

	GT	GKT	KT	GRT
Electric actuator, combustion air damper	•	•	•	•
Pressure switch, combustion air	•	•	•	•
Main flame detector, self checking	•	•	•	•
Gas pilot burner with integrated transformer	•	•	•	•
Flame detector integrated in gas pilot burner	•	•	•	•
Limit switch, liquid lance coupled*	–	•	•	•
Steel hose, liquid fuel*	–	•	•	•
Steel hose, atomizing medium*	–	•	•	•
Steel hose, ignition gas	•	•	–	•
Steel hose, ignition air	•	•	•	•
Sight glass	•	•	•	•
Air duct counter flange	•	•	•	•
Gasket, boiler/burner connection	•	•	•	•
Gasket, air duct/burner connection	•	•	•	•
Integrated cooling air supply for components**	•	•	•	•
Operation and maintenance manual	•	•	•	•

• Standard


*In liquid fuel burners

**Possible when combustion air temperature is < 50 °C

Options, Oilon ACE GKT/KT-28A...90A, GRT-6A...90A

	GT	GKT	KT	GRT
Pneumatic actuator, combustion air damper	•	•	•	•
Light fuel oil pilot burner	•	•	•	•
Electric igniter, incl. own retraction and limit switches	•	•	•	•
Steel hose, main gas*	•	•	•	•
Steel hose, primary gas*	•	•	•	•
Boiler flange	•	•	•	•
Cooling air from instrument/plant air	•	•	•	•
Dual liquid fuel lance	•	•	•	•
Simultaneous combustion	•	•	•	•
Hazardous area classification	•	•	•	•
SIL 2 components	•	•	•	•
SIL 3 components	•	•	•	•
FGR	•	•	•	•

* in gas burners

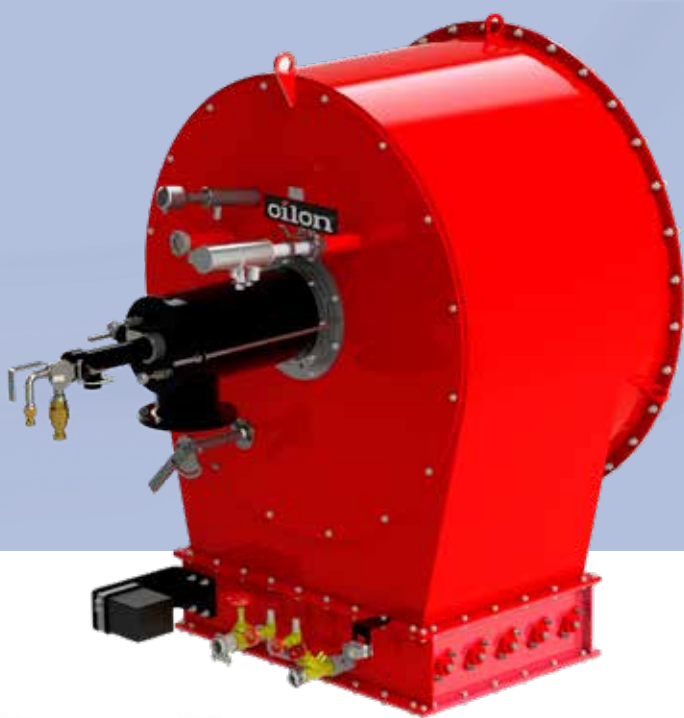


S burners

0.9 - 63 MW

S burners are typically used in water tube and fire tube boilers, but they can also be used in other boiler types. They are compatible with many special fuels and well-suited for process industry applications. Thanks to extensive flame adjustment options, the burner's flame geometry can be optimized for various furnace dimensions.

Type labeling, S burners

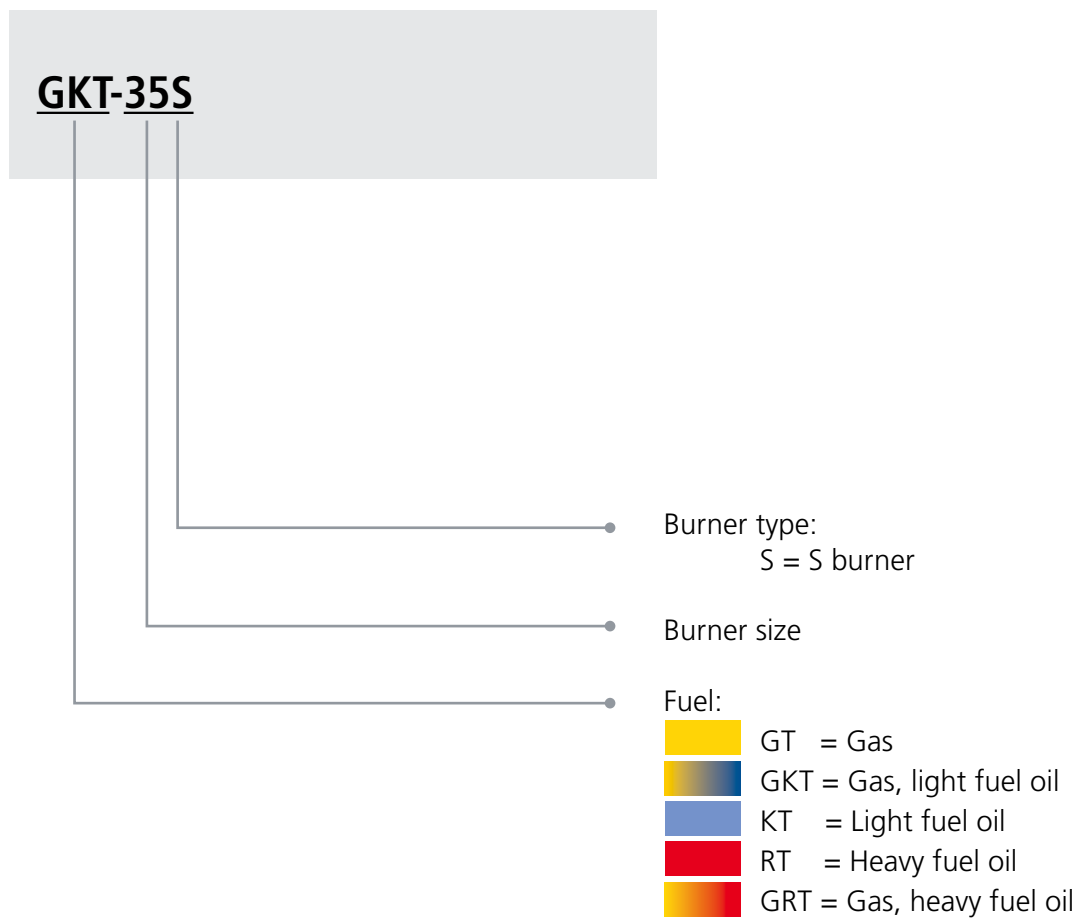

GT/GKT/KT/RT/GRT-5S...70S S burners

Technical Data, S burners

BURNER	GT-5S	GT-8S	GT-12S	GT-18S	GT-25S	GT-35S	GT-50S	GT-70S
Capacity,* MW	0.8 - 3.9	1.2 - 6.1	2.0 - 10.0	3.0 - 15.0	4.4 - 22.0	5.8 - 29.0	8.4 - 42.0	12.6 - 63.0
Connections – gas, burner	DN65	DN80	DN100	DN125	DN150	DN150	DN200	DN200
Pilot burner	GPB20							
Control unit	WD200**							
Weight, kg	280	360	480	600	940	1450	1700	2150

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD1000 or WD2000.

BURNER	GKT-5S	GKT-8S	GKT-12S	GKT-18S	GKT-25S	GKT-35S	GKT-50S	GKT-70S
Capacity,* MW	0.8 - 3.9	1.2 - 6.1	2.0 - 10.0	3.0 - 15.0	4.4 - 22.0	5.8 - 29.0	8.4 - 42.0	12.6 - 63.0
Connections – gas, burner – oil, burner	DN65 G1/2"	DN80 G1/2"	DN100 G1/2"	DN125 G3/4"	DN150 G3/4"	DN150 G1"	DN200 G1"	DN200 G1"
Pilot burner	GPB20							
Atomizing meth- od, liquid fuel	Air atomizing							
Control unit	WD1000**							
Weight, kg	300	410	500	620	960	1480	1730	2180

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD2000.

BURNER	KT-5S	KT-8S	KT-12S	KT-18S	KT-25S	KT-35S	KT-50S	KT-70S
Capacity,* MW	0.9 - 4.4	1.3 - 6.6	2.2 - 11.0	3.2 - 16.0	4.6 - 23.0	6.2 - 31.0	8.6 - 43.0	12.8 - 64.0
Connections – oil, burner	G1/2"	G1/2"	G1/2"	G3/4"	G3/4"	G1"	G1"	G1"
Pilot burner	GPB20							
Atomizing method, liquid fuel	Air atomizing							
Control unit	WD1000**							
Weight, kg	280	350	470	580	870	1370	1610	2070

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD2000.

BURNER	RT-5S	RT-8S	RT-12S	RT-18S	RT-25S	RT-35S	RT-50S	RT-70S
Capacity,* MW	0.9 - 4.4	1.3 - 6.6	2.2 - 11.0	3.2 - 16.0	4.6 - 23.0	6.2 - 31.0	8.6 - 43.0	12.8 - 64.0
Connections – oil, burner	G1/2"	G1/2"	G1/2"	G3/4"	G3/4"	G1"	G1"	G1"
Pilot burner	GPB20							
Atomizing method, liquid fuel	Steam/air atomizing							
Control unit	WD1000**							
Weight, kg	280	350	470	580	870	1370	1610	2070

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.


**Can be delivered with WD2000.

BURNER	GRT-5S	GRT-8S	GRT-12S	GRT-18S	GRT-25S	GRT-35S	GRT-50S	GRT-70S
Capacity,* MW	0.8 - 3.9	1.2 - 6.1	2.0 - 10.0	3.0 - 15.0	4.4 - 22.0	5.8 - 29.0	8.4 - 42.0	12.6 - 63.0
Connections – gas, burner – oil, burner	DN65 G1/2"	DN80 G1/2"	DN100 G1/2"	DN125 G3/4"	DN150 G3/4"	DN150 G1"	DN200 G1"	DN200 G1"
Pilot burner	GPB20							
Atomizing method, liquid fuel	Steam/air atomizing							
Control unit	WD1000**							
Weight, kg	300	410	500	620	960	1480	1730	2180

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD2000.

Dimensions, S burners

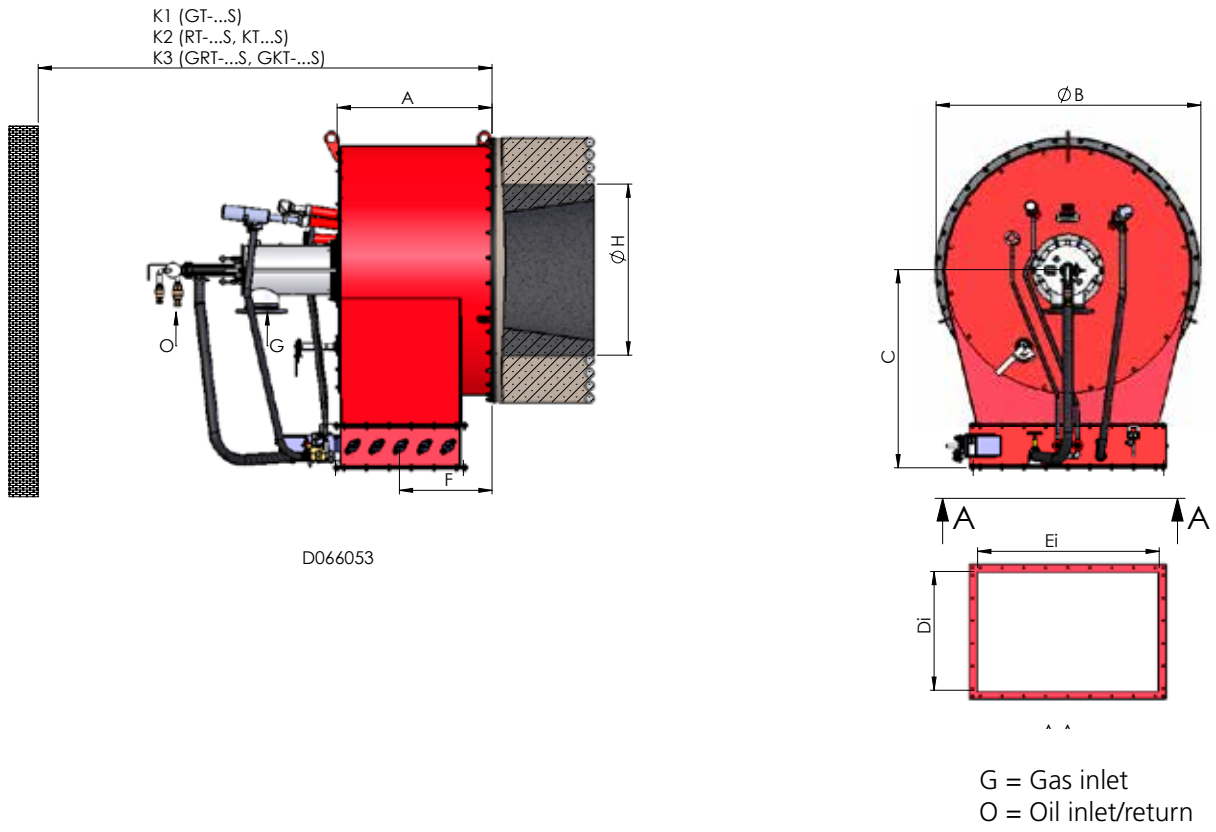

D066053

BURNER	A	ØB	C	Di	Ei	F	ØH	K1	K2	K3
GT/RT/KT/GRT/GKT-5S	390	735	740	260	425	244	520	1700	2100	2700
GT/RT/KT/GRT/GKT-8S	460	865	795	310	500	289	600	1900	2300	2900
GT/RT/KT/GRT/GKT-12S	540	995	865	395	625	327	710	2100	2500	3300
GT/RT/KT/GRT/GKT-18S	586	1155	980	470	750	335	820	2500	2900	3500
GT/RT/KT/GRT/GKT-25S	739	1315	1100	530	900	454	940	2600	2900	4000
GT/RT/KT/GRT/GKT-35S	853	1610	1250	630	1025	530	1030	2900	3500	4300
GT/RT/KT/GRT/GKT-50S	1024	1750	1300	785	1200	610	1220	3250	3500	4650
GT/RT/KT/GRT/GKT-70S	1212	2100	1500	1050	1550	713	1410	3500	4100	4700

Dimensions in mm.




LITEX burners

5 - 45 MW

Litex burners have a wind box that combines unique design with optimal combustion air flow. The burners are light and compact for their capacity level. By standard, the burners come with a masoned combustion head; steel combustion heads are offered as an alternative. The Litex series is primarily intended for use in water and fire tube boilers.

Type labeling, LITEX burners

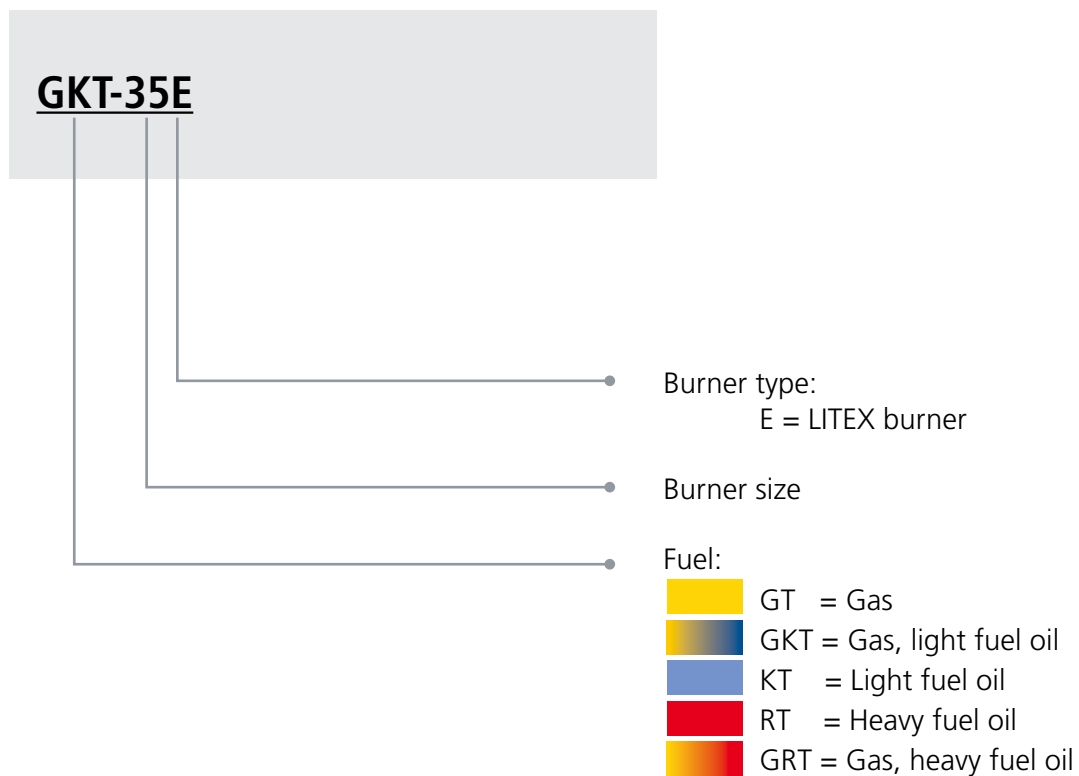

GT/GKT/KT/RT/GRT-35E/45E, LITEX burners

Technical Data, LITEX burners

BURNER	GT-35E	GT-45E
Capacity,* MW	5 - 35	6.5 - 45
Connections – gas, burner	DN150	DN150
Pilot burner	GPB20	
Control unit	WD200**	
Weight, kg	420	610

*Valid when combustion air temperature is +35 °C,
 $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD1000 or WD2000.

BURNER	GKT-35E	GKT-45E
Capacity,* MW – gas – oil	5 - 35 7 - 35	6.5 - 45 9 - 45
Connections – gas, burner – oil, burner	DN150 1"	DN150 1"
- gas, gas valve	DN150	DN150
Pilot burner	GPB20	
Atomizing meth- od, liquid fuel	Air atomizing	
Control unit	WD1000***	
Weight, kg	470	770

*Valid when combustion air temperature is +35 °C,
 $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

***Can be delivered with WD2000.

BURNER	KT-35E	KT-45E
Capacity,* MW	7 - 35	9 - 45
Connections – oil, burner	1"	1"
Pilot burner	GPB20	
Atomizing meth- od, liquid fuel	Air atomizing	
Control unit	WD1000***	
Weight, kg	400	590

*Valid when combustion air temperature is +35 °C,
 $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

***Can be delivered with WD2000.

BURNER	RT-35E	RT-45E
Capacity,* MW	7 - 35	9 - 45
Connections – oil, burner	1"	1"
Pilot burner	GPB20	
Atomizing meth- od, liquid fuel	Steam/air atomizing	
Control unit	WD1000***	
Weight, kg	400	590

*Valid when combustion air temperature is +35 °C,
 $\lambda = 1.17$, and ambient air pressure 1.013 bar a.


**Can be delivered with WD2000.

BURNER	GRT-35E	GRT-45E
Capacity,* MW – gas – oil	5 - 35 7 - 35	6.5 - 45 9 - 45
Connections – gas, burner – oil, burner	DN150 1"	DN150 1"
Pilot burner	GPB20	
Atomizing meth- od, liquid fuel	Steam/air atomizing	
Control unit	WD1000***	
Weight, kg	470	800

*Valid when combustion air temperature is +35 °C,
 $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

***Can be delivered with WD2000.

Dimensions, LITEX Burners

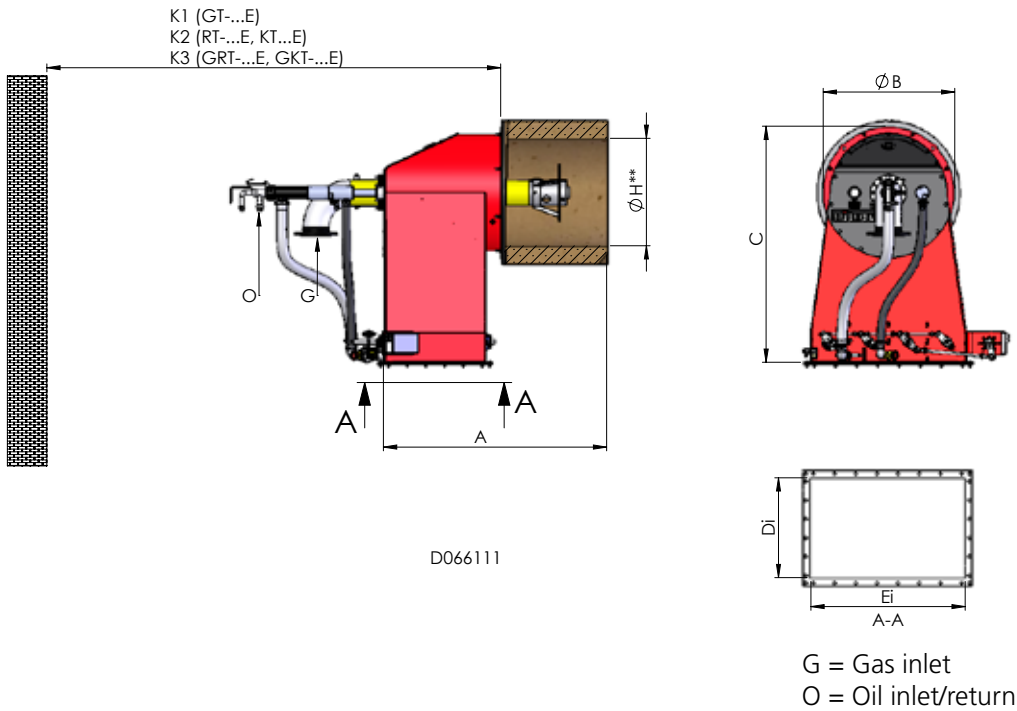

BURNER	A	ØB	C	Di	No	ØH	K1	K2	K3
GT/RT/KT/GRT/GKT-35E	1470	870	1560	660	1020	710	2700	3300	4100
GT/RT/KT/GRT/GKT-45E	1830	990	1895	830	1250	830	3450	4050	4850

ØH = Combustion head inner diameter
Dimensions in mm.



K burners

0.5 - 31 MW

K burners are the right choice for many demanding industrial processes, such as hazardous waste incineration. Thanks to tangential combustion air feeding and optimized air registers, the flame remains very stable even in case of large fluctuations in furnace pressure or other process conditions. The burner has a robust construction, ensuring high availability in extreme conditions.

Type labeling, K burners

GKT-35K

Burner type:
K = K burners

Burner size

Fuel:



GT = Gas

GKT = Gas, light fuel oil

KT = Light fuel oil

RT = Heavy fuel oil

GRT = Gas, heavy fuel oil

GT/GKT/KT/RT/GRT-3K...35K, K burners

Technical Data, K burners

BURNER	GT-3K	GT-5K	GT-8K	GT-12K	GT-18K	GT-25K	GT-35K
Capacity,* MW	0.5 - 2.7	0.9 - 4.5	1.4 - 7.0	2.2 - 11.0	3.2 - 16.0	4.4 - 22.0	6.2 - 31.0
Connections – gas, burner	DN65	DN65	DN80	DN80	DN100	DN125	DN150
Pilot burner	GPB20						
Control unit	WD200**						
Weight, kg	180	220	290	390	540	690	1020

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD1000 or WD2000.

BURNER	GKT-3K	GKT-5K	GKT-8K	GKT-12K	GKT-18K	GKT-25K	GKT-35K
Capacity,* MW	0.5 - 2.7	0.9 - 4.5	1.4 - 7.0	2.2 - 11.0	3.2 - 16.0	4.4 - 22.0	6.2 - 31.0
Connections – gas, burner – oil, burner	DN65 1/2"	DN65 1/2"	DN80 1/2"	DN80 1/2"	DN100 3/4"	DN125 3/4"	DN150 1"
Pilot burner	GPB20						
Atomizing meth- od, liquid fuel	Air atomizing						
Control unit	WD1000**						
Weight, kg	190	230	300	420	560	720	1060

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD2000.

BURNER	KT-3K	KT-5K	KT-8K	KT-12K	KT-18K	KT-25K	KT-35K
Capacity,* MW	0.5 - 2.7	0.9 - 4.5	1.4 - 7.0	2.2 - 11.0	3.2 - 16.0	4.4 - 22.0	6.2 - 31.0
Connections – oil, burner	1/2 "	1/2 "	1/2 "	1/2 "	3/4 "	3/4 "	1 "
Pilot burner	GPB20						
Atomizing meth- od, liquid fuel	Air atomizing						
Control unit	WD1000**						
Weight, kg	180	220	290	390	530	680	990

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD2000.

BURNER	RT-3K	RT-5K	RT-8K	RT-12K	RT-18K	RT-25K	RT-35K
Capacity,* MW	0.5 - 2.7	0.9 - 4.5	1.4 - 7.0	2.2 - 11.0	3.2 - 16.0	4.4 - 22.0	6.2 - 31.0
Connections – oil, burner	1/2 "	1/2 "	1/2 "	1/2 "	3/4 "	3/4 "	1 "
Pilot burner	GPB20						
Atomizing meth- od, liquid fuel	Steam/air atomizing						
Control unit	WD1000**						
Weight, kg	180	220	290	390	530	680	990

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.


**Can be delivered with WD2000.

BURNER	GRT-3K	GRT-5K	GRT-8K	GRT-12K	GRT-18K	GRT-25K	GRT-35K
Capacity,* MW	0.5 - 2.7	0.9 - 4.5	1.4 - 7.0	2.2 - 11.0	3.2 - 16.0	4.4 - 22.0	6.2 - 31.0
Connections – gas, burner – oil, burner	DN65 1/2 "	DN65 1/2 "	DN80 1/2 "	DN80 1/2 "	DN100 3/4 "	DN125 3/4 "	DN150 1 "
Pilot burner	GPB20						
Atomizing meth- od, liquid fuel	Steam/air atomizing						
Control unit	WD1000**						
Weight, kg	190	230	300	420	560	720	1060

*Valid when combustion air temperature is +35 °C, $\lambda = 1.17$, and ambient air pressure 1.013 bar a.


**Can be delivered with WD2000.

Dimensions, K-Burners

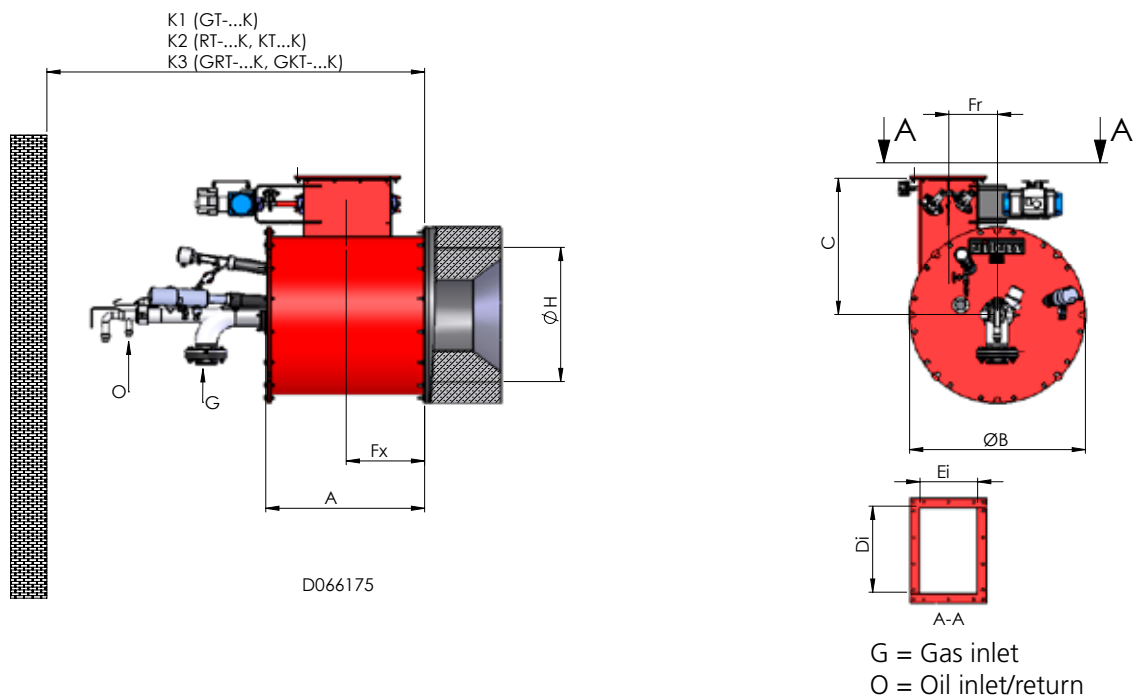

BURNER	A	ØB	C	Di	Ei	Fx	Fr	ØH	K1	K2	K3
GT/RT/KT/GRT/GKT-3K	430	520	520	230	155	210	128	500	2050	2400	2900
GT/RT/KT/GRT/GKT-5K	550	640	580	295	190	270	170	580	2150	2500	3100
GT/RT/KT/GRT/GKT-8K	690	780	710	375	250	340	210	670	2400	2700	3300
GT/RT/KT/GRT/GKT-12K	840	930	725	455	305	415	258	770	2800	2950	3550
GT/RT/KT/GRT/GKT-18K	1020	1110	815	555	370	505	215	900	3200	3500	4300
GT/RT/KT/GRT/GKT-25K	1200	1290	905	675	450	595	365	1030	3700	3900	4900
GT/RT/KT/GRT/GKT-35K	1410	1510	1050	820	540	700	430	1170	4100	4500	5500

Dimensions in mm.

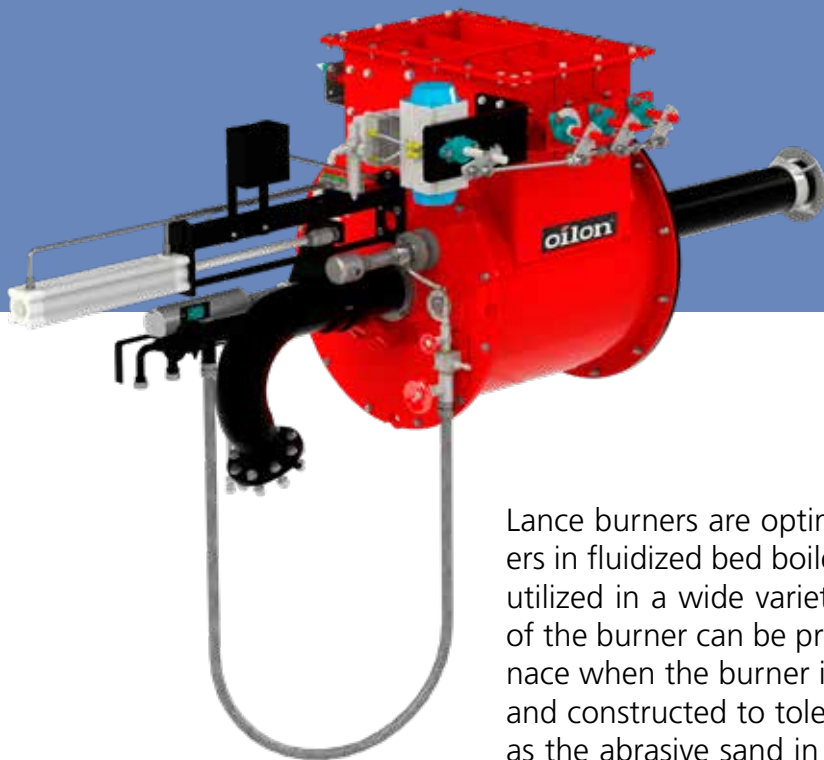


Lance Burners

1.5 - 58 MW

Lance burners are optimal for use as start-up and support burners in fluidized bed boilers and grate boilers, but they can also be utilized in a wide variety of other applications. The critical parts of the burner can be protected by retracting them out of the furnace when the burner is on standby. Lance burners are designed and constructed to tolerate demanding furnace conditions, such as the abrasive sand in fluidized bed boilers, ash, and other particles.

Type labeling, lance burners

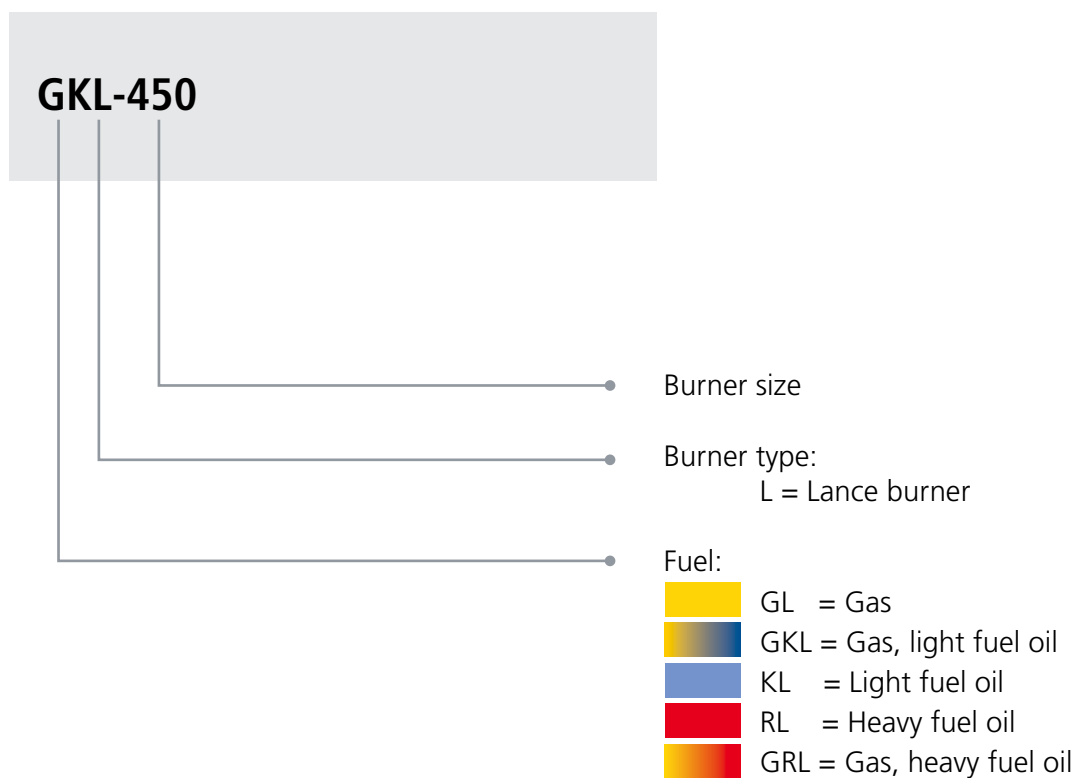

GL/GKL/KL/RL/GRL-250...750, lance burners

Technical Data, lance burners

BURNER	GL-250	GL-350	GL-450	GL-550	GL-650	GL-750
Capacity,* MW	1.5 - 6.1	3.1 - 12.5	5.3 - 21.0	7.8 - 31.0	11.5 - 46.0	14.5 - 58.0
Connections – gas, burner	DN65	DN80	DN125	DN150	DN200	DN200
Pilot burner	GPB20					
Control unit	WD200**					
Weight, kg	250	350	440	530	700	960

*Valid when combustion air temperature is +35 °C, $\lambda=0.8$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD1000 or WD2000.

BURNER	GKL-250	GKL-350	GKL-450	GKL-550	GKL-650	GKL-750
Capacity,* MW	1.5 - 6.1	3.1 - 12.5	5.3 - 21.0	7.8 - 31.0	11.5 - 46.0	14.5 - 58.0
Connections – gas, burner – oil, burner	DN65 R1/2"	DN80 R1/2"	DN125 R3/4"	DN150 R1"	DN200 R1"	DN200 R1"
Pilot burner	GPB20					
Atomizing method, liquid fuel	Air atomizing					
Control unit	WD1000**					
Weight, kg	250	330	500	560	720	980

*Valid when combustion air temperature is +35 °C, $\lambda=0.8$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD2000.

BURNER	KL-250	KL-350	KL-450	KL-550	KL-650	KL-750
Capacity,* MW	1.5 - 6.1	3.1 - 12.5	5.3 - 21.0	7.8 - 31.0	11.5 - 46.0	14.5 - 58.0
Connections – oil, burner	R1/2"	R1/2"	R3/4"	R1"	R1"	R1"
Pilot burner	GPB20					
Atomizing method, liquid fuel	Air atomizing					
Control unit	WD1000**					
Weight, kg	240	320	420	500	650	900

*Valid when combustion air temperature is +35 °C, $\lambda=0.8$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD2000.

BURNER	RL-250	RL-350	RL-450	RL-550	RL-650	RL-750
Capacity,* MW	1.5 - 6.1	3.1 - 12.5	5.3 - 21.0	7.8 - 31.0	11.5 - 46.0	14.5 - 58.0
Connections – oil, burner	R1/2"	R1/2"	R3/4"	R1"	R1"	R1"
Pilot burner	GPB20					
Atomizing method, liquid fuel	Steam/air atomizing					
Control unit	WD1000**					
Weight, kg	240	320	420	500	650	900

*Valid when combustion air temperature is +35 °C, $\lambda=0,8$ and ambient air pressure 1.013 bar a.



**Can be delivered with WD2000.

BURNER	GRL-250	GRL-350	GRL-450	GRL-550	GRL-650	GRL-750
Capacity,* MW	1.5 - 6.1	3.1 - 12.5	5.3 - 21.0	7.8 - 31.0	11.5 - 46.0	14.5 - 58.0
Connections – gas, burner – oil, burner	DN65 R1/2"	DN80 R1/2"	DN125 R3/4"	DN150 R1"	DN200 R1"	DN200 R1"
Pilot burner	GPB20					
Atomizing method, liquid fuel	Steam/air atomizing					
Control unit	WD1000**					
Weight, kg	250	330	500	560	720	980

*Valid when combustion air temperature is +35 °C, $\lambda=0.8$, and ambient air pressure 1.013 bar a.

**Can be delivered with WD2000.

Dimensions, Lance Burners

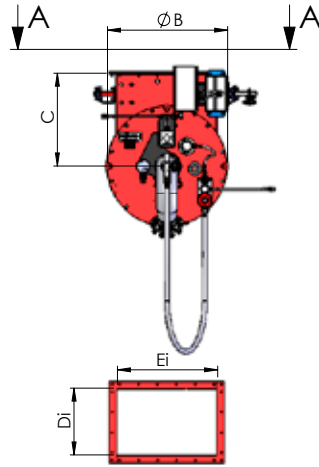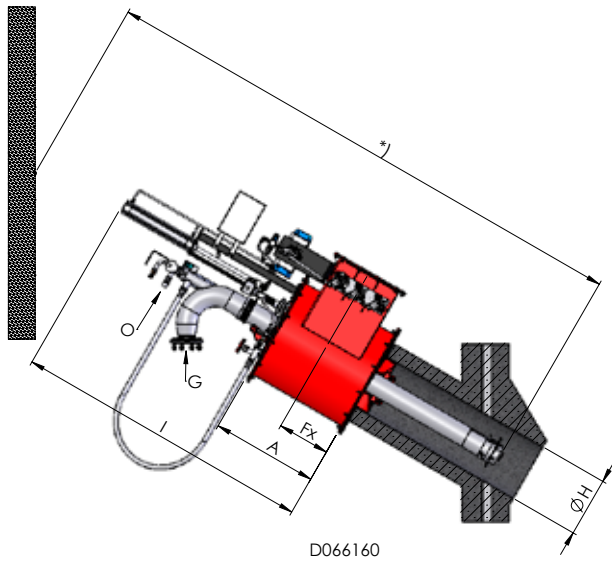

A-A

G = Gas inlet
O = Oil inlet/return
* = Service space case by case

BURNER	A	ØB	C	Di	Ei	Fx	ØH	I
GL/GKL/KL/RL/GRL-250	550	550	515	250	375	270	250	1603
GL/RL/KL/GRL/GKL-350	580	660	565	370	555	280	350	1623
GL/GKL/KL/RL/GRL-450	720	810	625	450	675	355	450	1982
GL/GKL/KL/RL/GRL-550	820	960	695	540	820	405	550	2082
GL/GKL/KL/RL/GRL-650	1005	1210	950	640	990	500	650	2282
GL/GKL/KL/RL/GRL-750	1160	1450	750	740	1180	575	750	2450

Dimensions in mm.

Scope of delivery, S, LITEX, K, and lance burners

	S	K	LITEX	LANCE
Electric actuator, combustion air damper	•	•	•	•
Pressure switch, combustion air	•	•	•	•
Main flame detector, self checking	•	•	•	•
Gas pilot burner with integrated transformer	•	•	•	•
Flame detector integrated in gas pilot burner	•	•	•	•
Retraction of pilot burner, incl. limit switches	–	–	–	•
Limit switch, liquid lance coupled*	•	•	•	•
Steel hose, liquid fuel*	•	•	•	•
Steel hose, atomizing medium*	•	•	•	•
Steel hose, ignition gas	•	•	•	•
Steel hose, ignition air	•	•	•	•
Sight glass	•	•	•	•
Air duct counter flange	•	•	•	•
Gasket, boiler/burner connection	•	•	•	•
Gasket, air duct/burner connection	•	•	•	•
Integrated cooling air supply for components***	•	•	•	•
Operation and maintenance manual	•	•	•	•

• Standard o Option

*In liquid fuel burners

***Possible when combustion air temperature is < 50 °C

Options for S, LITEX, K and lance burners


	S	K	LITEX	LANCE
Pneumatic actuator, combustion air damper	o	o	o	o
Light fuel oil pilot burner	o	o	o	o
Retraction of pilot burner, incl. limit switches	o	o	–	–
Electric igniter, incl. own retraction and limit switches	o	o	o	o
Steel hose, main gas**	o	o	o	o
Boiler flange	o	o	o	o
Cooling air from instrument/plant air	o	o	o	o
Gas ring	o	o	–	–
Dual/triple gas lance	o	o	–	o
Dual liquid fuel lance	o	o	o	o
Simultaneous combustion	o	o	o	o
Hazardous area classification	o	o	o	o
SIL 2 components	o	o	o	o
SIL 3 components	o	o	o	o
FGR	o	o	o	o

• Standard o Option

**In gas burners

PI Diagrams for S, LITEX, K and lance burners

GAS, POSITION CONTROL

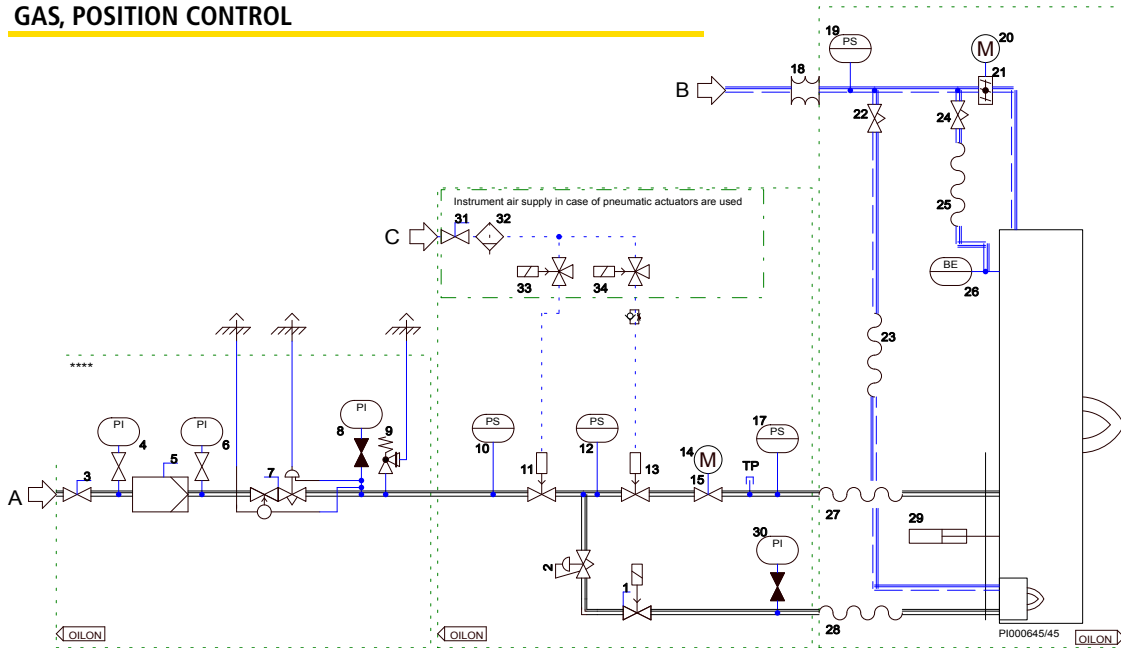

1. Solenoid valve, NC
2. Pressure regulator
3. Manual shut-off valve
4. Pressure gauge
5. Gas filter
6. Pressure gauge
7. Pressure regulator with safety shut-off
8. Pressure gauge
9. Safety relief valve
10. Pressure switch, low
11. Safety shut-off valve
12. Pressure switch, low and high
13. Safety shut-off valve
14. Actuator
15. Gas control valve

17. Pressure switch, high
18. Bellow***
19. Pressure switch, low
20. Actuator
21. Combustion air damper
22. Needle valve
23. Flexible hose
24. Needle valve
25. Flexible hose
26. Flame detector
27. Flexible hose
28. Flexible hose
29. Pneumatic cylinder, optional in lance burners
30. Pressure gauge
31. Manual shut-off valve*

32. Air filter*
33. Solenoid valve*
34. Solenoid valve*

A = Gas supply
B = Air supply
C = Instrument air


TP = Test point. In standard solution, integrated in the pressure switch

*Instrument air components in case pneumatic actuators are used

***Necessary part. Not included in Oilon delivery.

****not included in standard delivery.

GAS, FLOW CONTROL

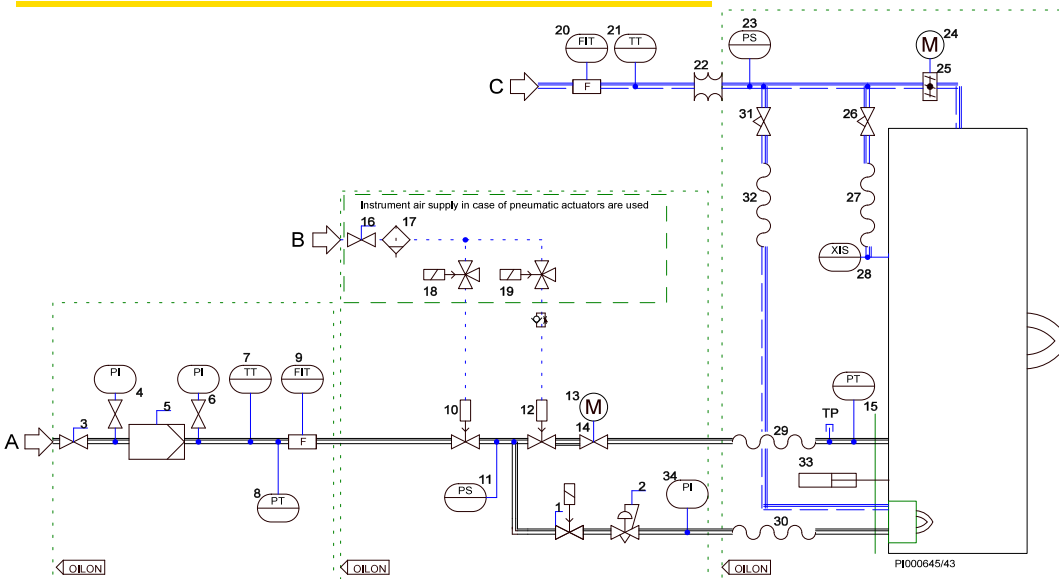

1. Solenoid valve, NC
2. Pressure regulator
3. Manual shut-off valve
4. Pressure gauge
5. Gas filter
6. Pressure gauge
7. Temperature transmitter
8. Pressure transmitter, high and low
9. Flow measurement

10. Safety shut off valve
11. Pressure switch
12. Safety shut off valve
13. Actuator
14. Gas control valve
15. Pressure transmitter, high
16. Manual shut-off valve*
17. Air filter*
18. Solenoid valve*


19. Solenoid valve*
20. Flow measurement
21. Temperature transmitter
22. Bellow, not in Oilon delivery
23. Pressure switch, low
24. Actuator
25. Combustion air damper
26. Needle valve
27. Flexible hose

28. Flame detector
29. Flexible hose
30. Flexible hose
31. Needle valve
32. Flexible hose
33. Pneumatic cylinder, standard in lance burner, optional in S and K burners
34. Pressure gauge

A = Gas supply
B = Instrument air
C = Air supply


*Instrument air components in case pneumatic actuators are used

LIGHT FUEL OIL, POSITION CONTROL

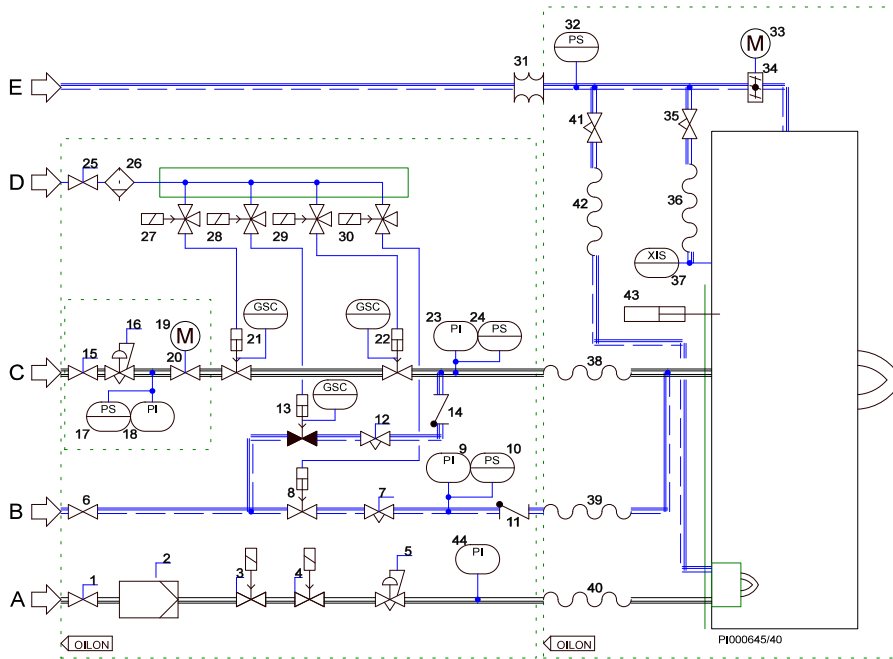

- | | | | |
|---------------------------|---------------------------|---|----------------------|
| 1. Manual shut-off valve | 16. Pressure regulator | 31. Bellow, not in Oilon delivery | 44. Pressure gauge |
| 2. Gas filter | 17. Pressure switch, high | 32. Pressure switch, low | |
| 3. Solenoid valve, NC | 18. Pressure gauge | 33. Actuator | |
| 4. Solenoid valve, NC | 19. Actuator | 34. Combustion air damper | |
| 5. Pressure regulator | 20. Oil control valve | 35. Needle valve | A = Ignition gas |
| 6. Manual shut-off valve | 21. Safety shut-off valve | 36. Flexible hose | B = Atomizing medium |
| 7. Manual control valve | 22. Safety shut-off valve | 37. Flame detector | C = Light fuel oil |
| 8. Shut-off valve | 23. Pressure gauge | 38. Flexible hose | D = Instrument air |
| 9. Pressure gauge | 24. Pressure switch, high | 39. Flexible hose | E = Air supply |
| 10. Pressure switch, low | 25. Manual shut-off valve | 40. Flexible hose | |
| 11. Non-return valve | 26. Air filter | 41. Needle valve | |
| 12. Manual control valve | 27. Solenoid valve | 42. Flexible hose | |
| 13. Shut-off valve, NC | 28. Solenoid valve | 43. Pneumatic cylinder, standard in lance burner, optional in S and K burners | |
| 14. Non-return valve | 29. Solenoid valve | | |
| 15. Manual shut-off valve | 30. Solenoid valve | | |

LIGHT FUEL OIL, FLOW CONTROL

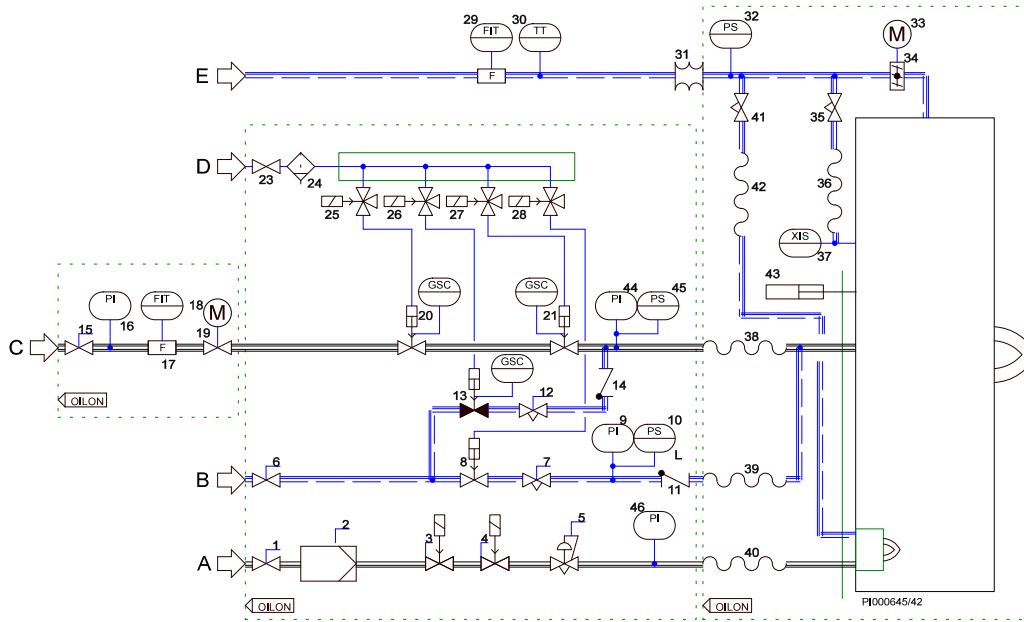


1. Manual shut-off valve
2. Gas filter
3. Solenoid valve, NC
4. Solenoid valve, NC
5. Pressure regulator
6. Manual shut-off valve
7. Manual control valve
8. Shut-off valve
9. Pressure gauge
10. Pressure switch, low
11. Non-return valve
12. Manual control valve
13. Shut-off valve, NC
14. Non-return valve
15. Manual shut-off valve
16. Pressure gauge
17. Flow measurement
18. Actuator

19. Oil Control valve
20. Safety shut-off valve
21. Safety shut-off valve
22. Pressure transmitter
23. Manual shut-off valve
24. Air filter
25. Solenoid valve
26. Solenoid valve
27. Solenoid valve
28. Solenoid valve
29. Flow measurement
30. Temperature transmitter
31. Bellow, not in Oilon delivery
32. Pressure switch, low
33. Actuator
34. Combustion air damper
35. Needle valve
36. Flexible hose

37. Flame detector
 38. Flexible hose
 39. Flexible hose
 40. Flexible hose
 41. Needle valve
 42. Flexible hose
 43. Pneumatic cylinder, standard in lance burner, optional in S and K burners
 44. Pressure gauge
 45. Pressure switch, low
 46. Pressure gauge
- A = Ignition gas
B = Atomizing medium
C = Light fuel oil
D = Instrument air
E = Air supply

HEAVY FUEL OIL, POSITION CONTROL

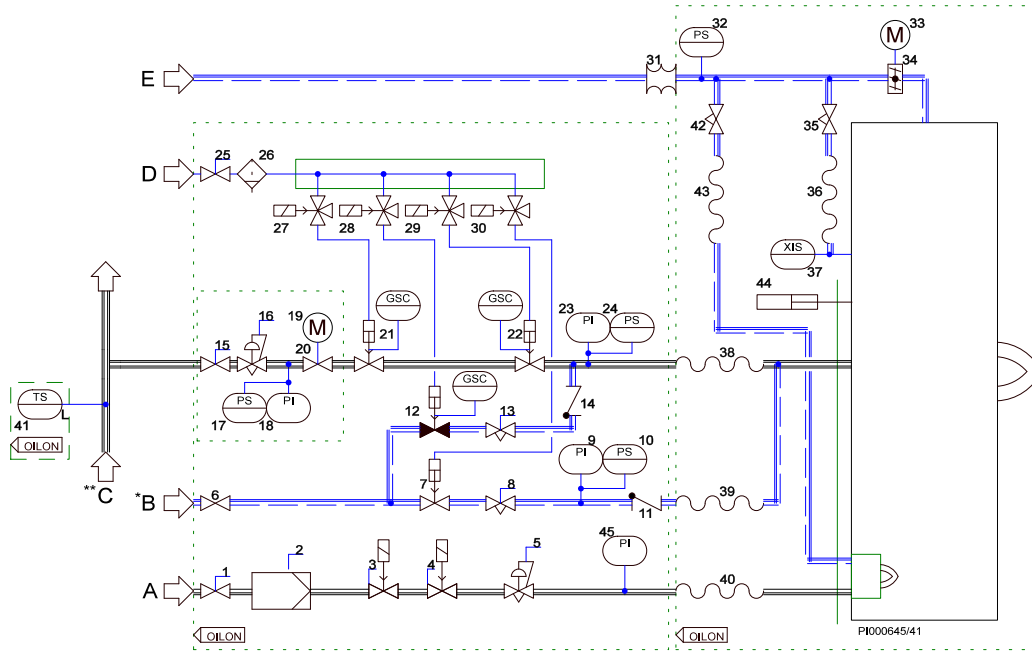

- | | | |
|---------------------------|-----------------------------------|---|
| 1. Manual shut-off valve | 18. Pressure gauge | 35. Needle valve |
| 2. Gas filter | 19. Actuator | 36. Flexible hose |
| 3. Solenoid valve, NC | 20. Oil control valve | 37. Flame detector |
| 4. Solenoid valve, NC | 21. Safety shut-off valve | 38. Flexible hose |
| 5. Pressure regulator | 22. Safety shut-off valve | 39. Flexible hose |
| 6. Manual shut-off valve | 23. Pressure gauge | 40. Flexible hose |
| 7. Shut-off valve | 24. Pressure switch, high | 41. Temperature switch, low, loose delivery |
| 8. Manual control valve | 25. Manual shut-off valve | 42. Needle valve |
| 9. Pressure gauge | 26. Air filter | 43. Flexible hose |
| 10. Pressure switch, low | 27. Solenoid valve | 44. Pneumatic cylinder, standard in lance burner, optional in S and K burners |
| 11. Non-return valve | 28. Solenoid valve | 45. Pressure gauge |
| 12. Shut-off valve, NC | 29. Solenoid valve | |
| 13. Manual control valve | 30. Solenoid valve | |
| 14. Non-return valve | 31. Bellow, not in Oilon delivery | |
| 15. Manual shut-off valve | 32. Pressure switch, low | |
| 16. Pressure regulator | 33. Actuator | |
| 17. Pressure switch, high | 34. Combustion air damper | |


C = Heavy fuel oil
D = Instrument air
E = Air supply

* Insulation of atomizing steam line. Not in Oilon delivery.

** Trace heating and insulation of oil line. Not in Oilon delivery.

A = Ignition gas
B = Atomizing medium, steam

HEAVY FUEL OIL, FLOW CONTROL

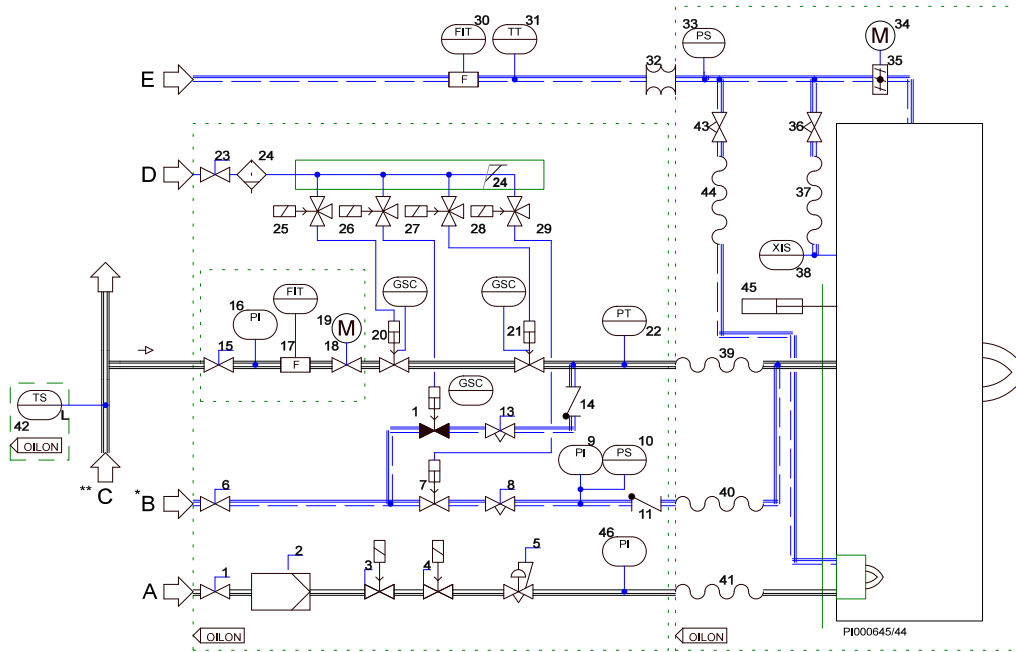

1. Manual shut-off valve
2. Gas filter
3. Solenoid valve, NC
4. Solenoid valve, NC
5. Pressure regulator
6. Manual shut-off valve
7. Shut-off valve
8. Manual control valve
9. Pressure gauge
10. Pressure switch, low
11. Non-return valve
12. Shut-off valve, NC
13. Manual control valve
14. Non-return valve
15. Manual shut-off valve
16. Pressure gauge
17. Flow measurement

18. Oil control valve
19. Actuator
20. Safety shut-off valve
21. Safety shut-off valve
22. Pressure transmitter
23. Manual shut-off valve
24. Air filter
25. Solenoid valve
26. Solenoid valve
27. Solenoid valve
28. Solenoid valve
29. Solenoid valve
30. Flow measurement
31. Temperature transmitter
32. Bellow, not in Oilon delivery
33. Pressure switch, low
34. Actuator

35. Combustion air damper
 36. Needle valve
 37. Flexible hose
 38. Flame detector
 39. Flexible hose
 40. Flexible hose
 41. Flexible hose
 42. Temperature transmitter, low, loose delivery
 43. Needle valve
 44. Flexible hose
 45. Pneumatic cylinder, standard in lance burner, optional in S and K burners
 46. Pressure gauge
- A = Ignition gas



B = Atomizing medium, steam
C = Heavy fuel oil
D = Instrument air
E = Air supply

* = Insulation of atomizing steam line. Not in Oilon delivery.

** = Trace heating and insulation of oil line. Not in Oilon delivery.

Valve units for S, LITEX, K and lance burners

Type labeling, Control valve units

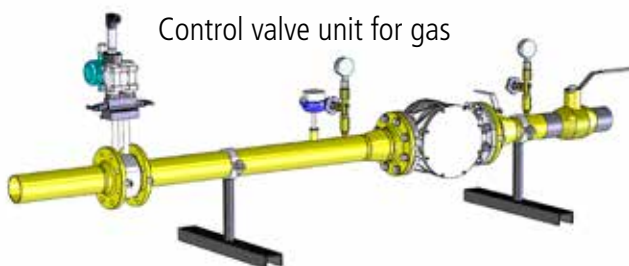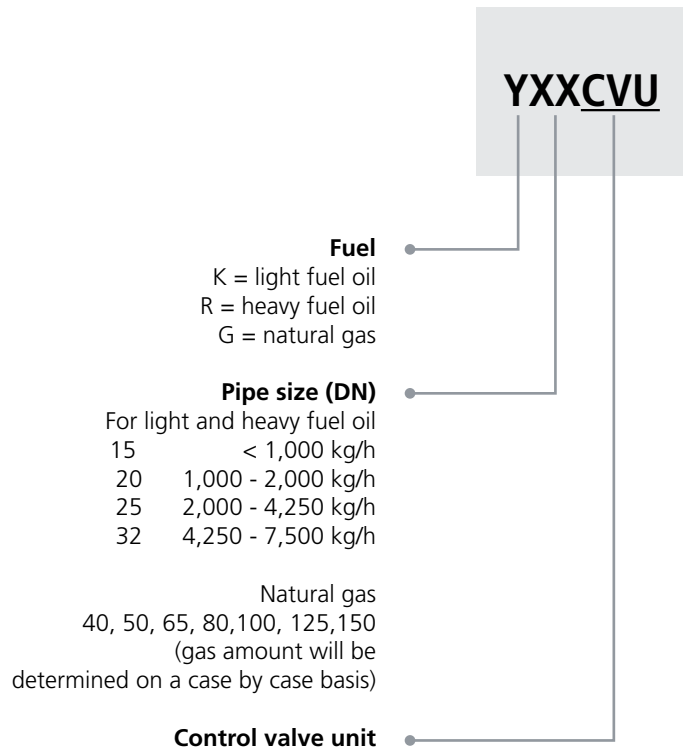

Control valve unit for oil



Type labeling, Shut-off valve units

YXXSVU

Fuel

K = light fuel oil
R = heavy fuel oil
G = natural gas

Pipe size (DN)


For light and heavy fuel oil

15	< 1,000 kg/h
20	1,000 - 2,000 kg/h
25	2,000 - 4,250 kg/h
32	4,250 - 7,500 kg/h

Natural gas

40, 50, 65, 80, 100, 125, 150
(gas amount will be determined on a case by case basis)

Shut-off valve unit

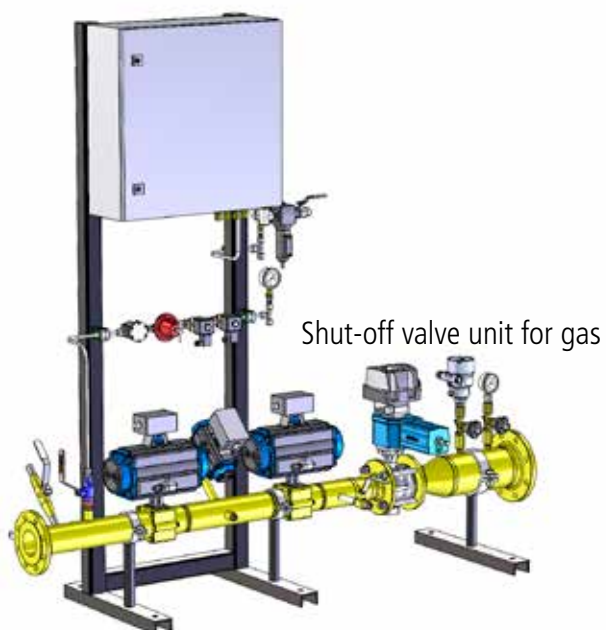

Shut-off valve unit for oil



Type labeling, valve units

Control and shut-off valve units are integrated as one unit

YXXVU

Fuel

- K = light fuel oil
- R = heavy fuel oil
- G = natural gas

Pipe size (DN)


For light and heavy fuel oil	
15	< 1,000 kg/h
20	1,000 - 2,000 kg/h
25	2,000 - 4,250 kg/h
32	4,250 - 7,500 kg/h

Natural gas


40, 50, 65, 80, 100,
125, 150

(gas amount will be
determined on a case by case basis)


Valve unit

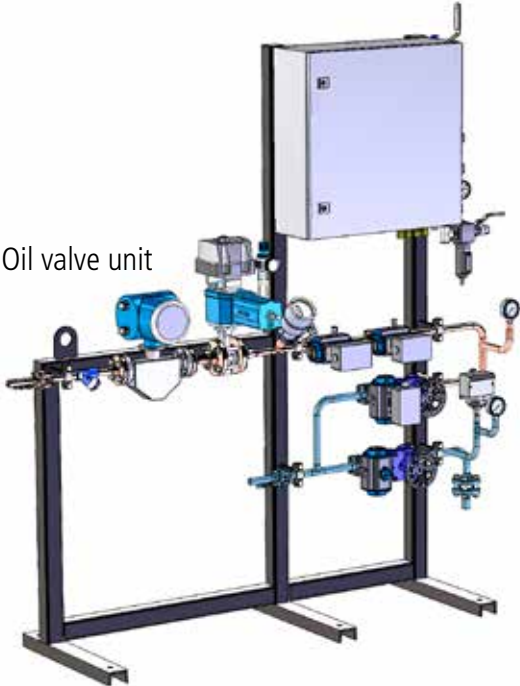

Oil valve unit

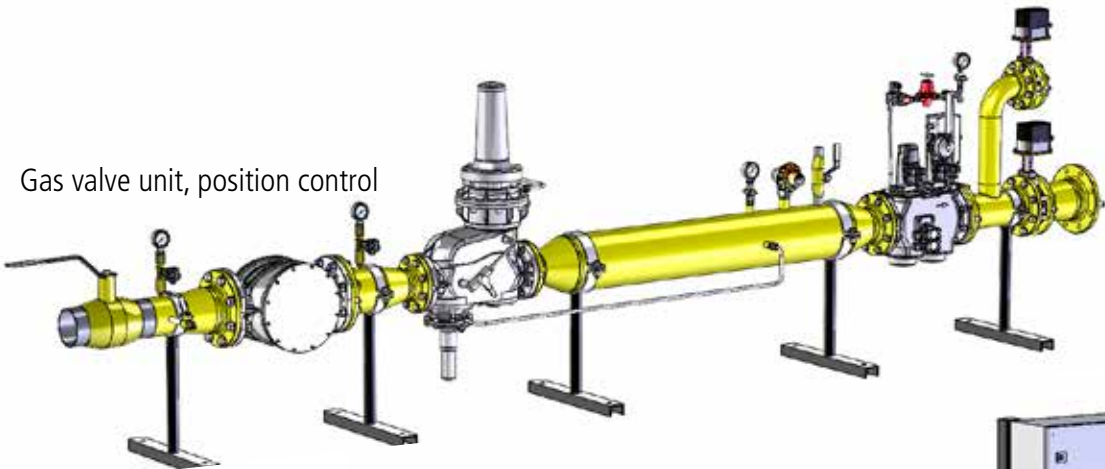

Gas valve unit, position control

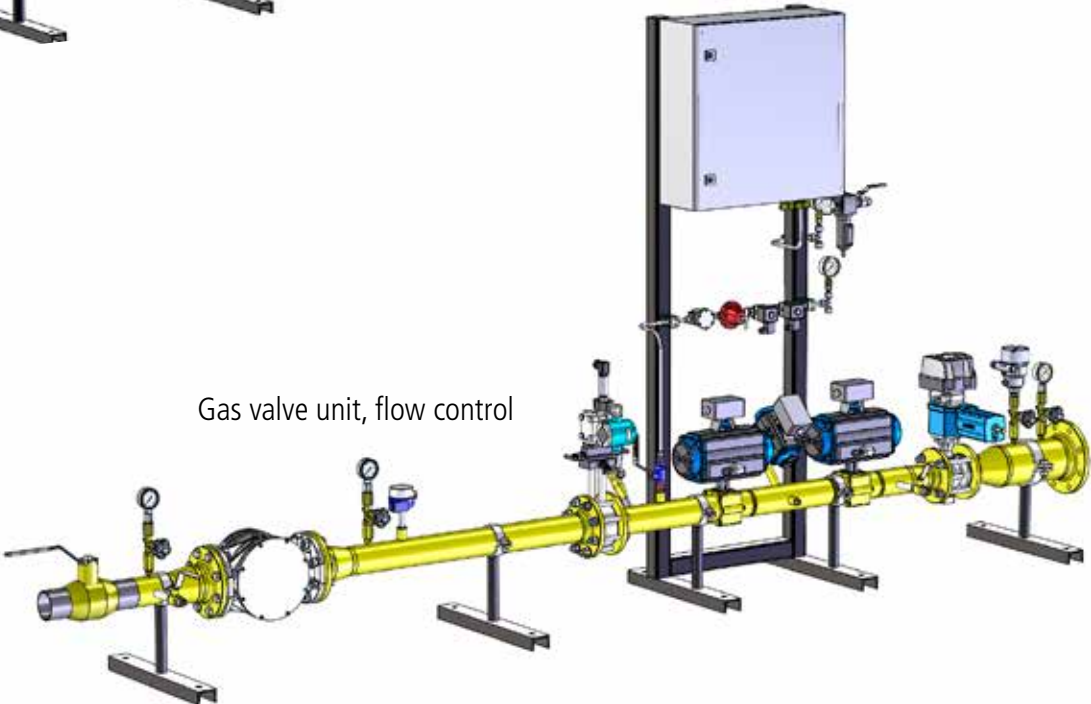

Gas valve unit, flow control

Accessories

Accessories

Combustion air fan

Duoblock burner requires a separate combustion air fan.

Scope of delivery:

- Electric motor
- Flexible connector, pressurized side
- 2 connector flanges
- Vibration dampers



Optional:

- Suction and pressure side silencer
- silencer for the entire fan
- temperature and pressure sensor



Required combustion air flow

Diagrams 1 and 2 indicate the required combustion air flow for each kilogram of oil or nominal cubic meter of natural gas.

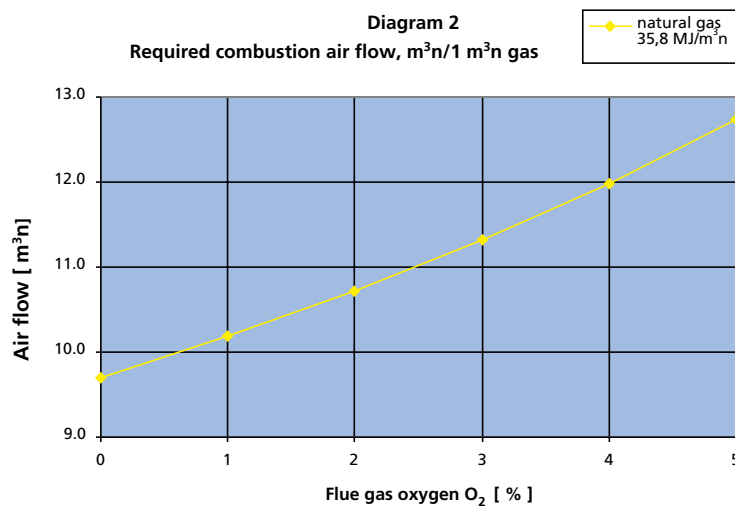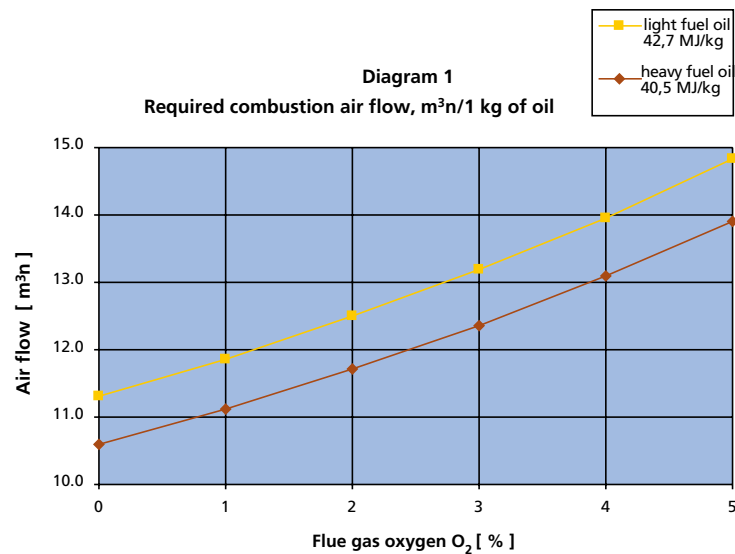


Air distribution

Run the air duct to the burner directly from below the burner. The minimum length for the straight section before the burner is 5 x the channel's characteristic diameter.

If the duct cannot be installed as instructed above, an air distribution box should be used.

Air distribution box for ME burners

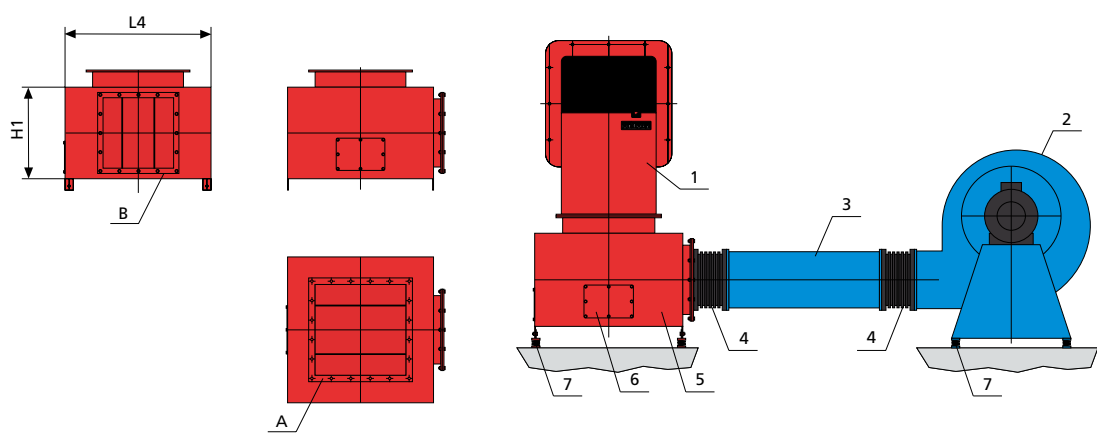

BURNER	H1	L4
400/600	280	800
800/1000/1200	440	900
1600/200	550	1130

The dimensions H1 and L4 are recommended minimum values.


A. To be dimensioned according to the air duct of the burner.
B. To be dimensioned as ordered.

- 1. Burner
- 2. Fan
- 3. Air duct
- 4. Bellows (not necessary at both ends)
- 5. Air distribution box
- 6. Maintenance hatch
- 7. Vibration damper

Dimensions in mm.

The maximum allowed difference in the combustion air flow profile is +/-10% at the burner inlet connection flange. Take special care in multi-burner configurations where it is crucial to make sure that the each burner receives the same amount of combustion air.



Example of an air duct for two burners

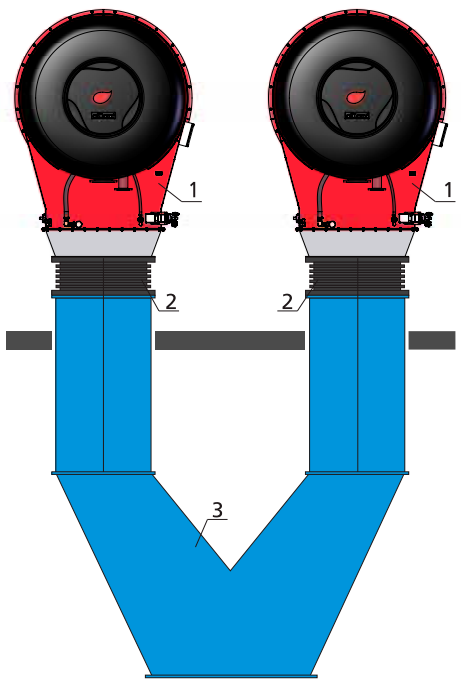

- 1. Burner
- 2. Bellows (not necessary at both ends)
- 3. Air duct

Booster unit PKYK 2...5 for light fuel oil

The booster unit is intended for pumping light fuel oil with a viscosity of 4 - 12 mm²/s at +20 °C. The oil supplied to the booster unit must be filtered, max. filtration degree = 400 µm.

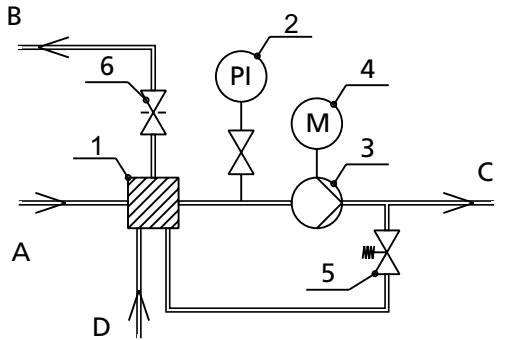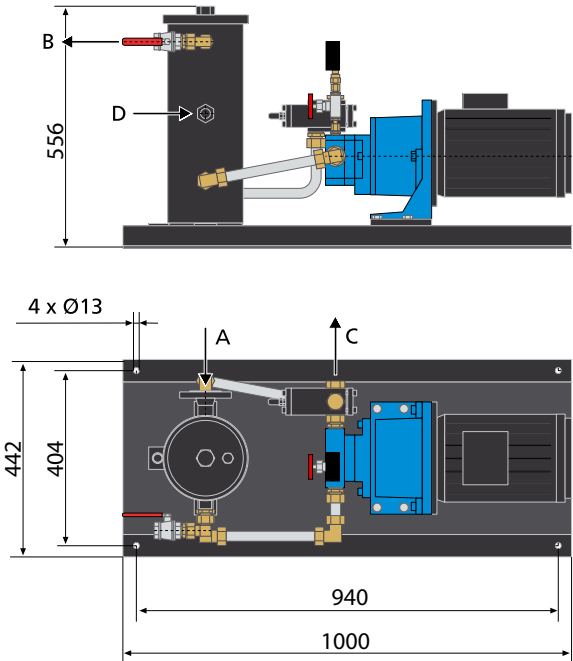


1. Oil filter
2. Pressure gauge
3. Oil pump
4. Electric motor
5. Pressure regulating valve
6. Drilled ball valve
- A. Inlet to the booster unit DN25, 1 - 5 bar, 4 - 12 mm²/s
- B. Return from the booster unit R 1/2"
- C. Inlet to the burner Ø 22
- D. Return from the burner Ø 22

BOOSTER UNIT	MOTOR 400 V/50 HZ		OIL PUMP TYPE	PUMP OUTPUT 12 mm ² /S 25 BAR KG/H
	KW	RPM		
PKYK 2	4	3000	T4 C	1980
PKYK 3	4	3000	T5 C	2900
PKYK 5	5.5	3000	AFI40R54	5500

The output has been calculated using a density of 850 kg/m³ for light fuel oil.

Diagram 3
Selection of the booster unit for light fuel oil

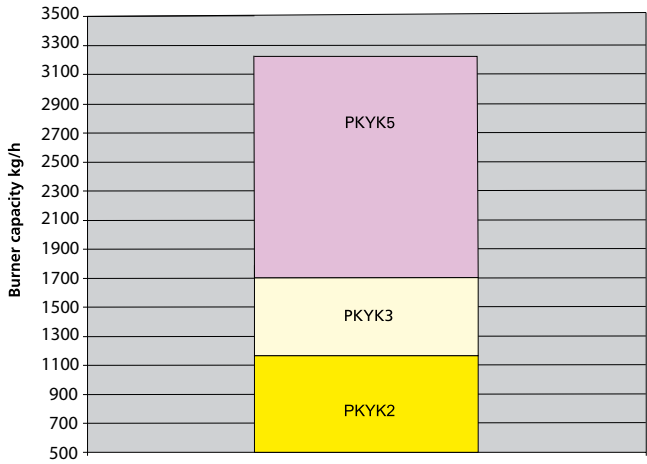


Only valid when using spillback nozzles


Use diagram 3 to select PKYK booster units.

Booster unit PKYR 1...8 for heavy fuel oil


The booster unit is intended for pumping light fuel oil with a viscosity of 650 mm²/s at +50 °C. The oil supplied to the booster unit must be filtered, max. filtration degree = 400 µm.

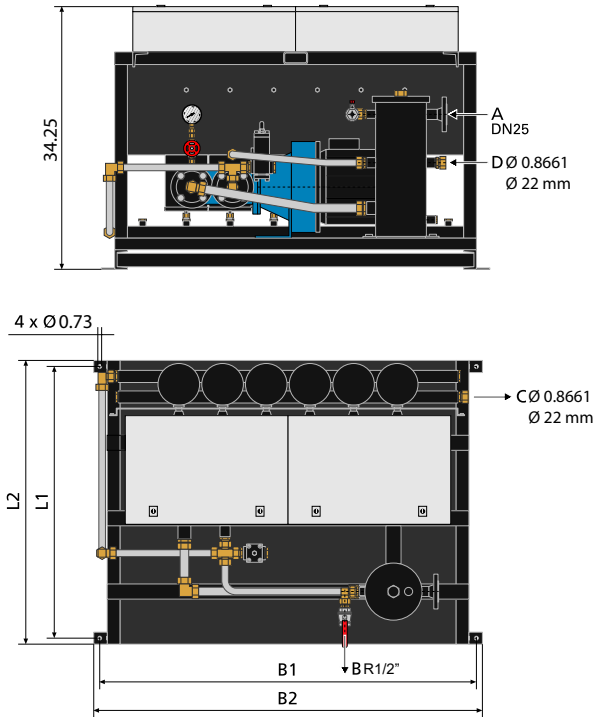

PKYR 1...6

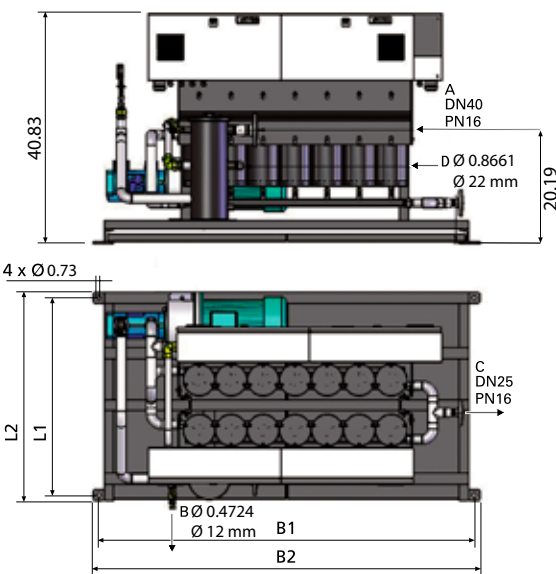

PKYR 7...8

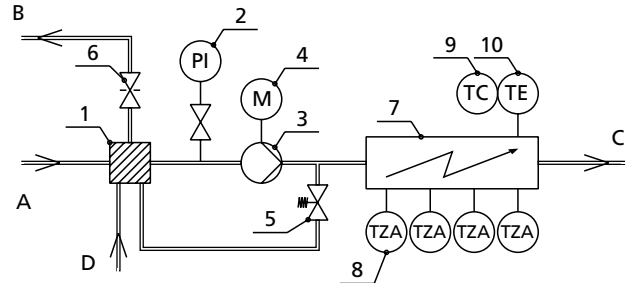


1. Oil filter
2. Pressure gauge
3. Oil pump
4. Electric motor
5. Pressure regulating valve
6. Drilled ball valve
7. Preheater
8. Limit thermostat
9. Temperature regulator and lower limit thermostat
10. Temperature sensor

- A. Inlet to the booster unit
3 - 5 bar, 4 - 70 mm²/s
- B. Return from the booster unit
- C. Inlet to the burner
- D. Return from the burner

Booster unit	L1	L2	B1	B2
PKYR 1	840	880	815	855
PKYR 3	840	880	815	855
PKYR 4	900	940	1250	1290
PKYR 6	900	940	1540	1580
PKYR 8	890	940	1700	1750

Dimensions in mm.

Diagram 4
Selection of the booster unit for heavy fuel oil

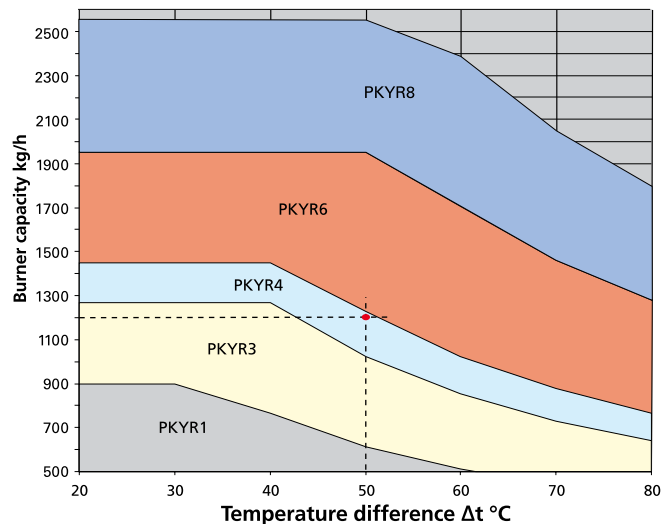

Only valid when using spillback nozzles

Booster unit	Heat exchanger 400 V/50 Hz kW	Motor 400 V/50 Hz kW rpm	Oil pump Type	Pump output 12 mm ² /s 25 bar kg/h
PKYR 1	18	3 3000	AFI20R46	2030
PKYR 3	30	4 3000	AFI20R56	2880
PKYR 4	36	5.5 3000	AFI40R38	3280
PKYR 6	60	5.5 3000	AFI40R46	4430
PKYR 8	84	7.5 3000	AFI40R54	5500

The output has been calculated using a density of 980 kg/m³ for heavy fuel oil.

Use diagram 4 to select PKYR booster units.

Scope of delivery


Booster units include the following equipment:

	PKYK	PKYR
Oil filter	•	•
Pressure gauge	•	•
Oil pump	•	•
Electric motor	•	•
Pressure regulating valve	•	•
Drilled ball valve	•	•
Preheater		•
Limiter thermostats		•
Temperature regulator and lower limit thermostat		•
Temperature sensor		•
Trace heating of the piping		o
Pressure gauge for monitoring oil inlet pressure	o	o
Pressure switch	o	o
Operation and maintenance manual	•	•


• standard delivery o optional

Transfer pump unit SPY

SPY-500-I...3000-I single pump unit for light fuel oil

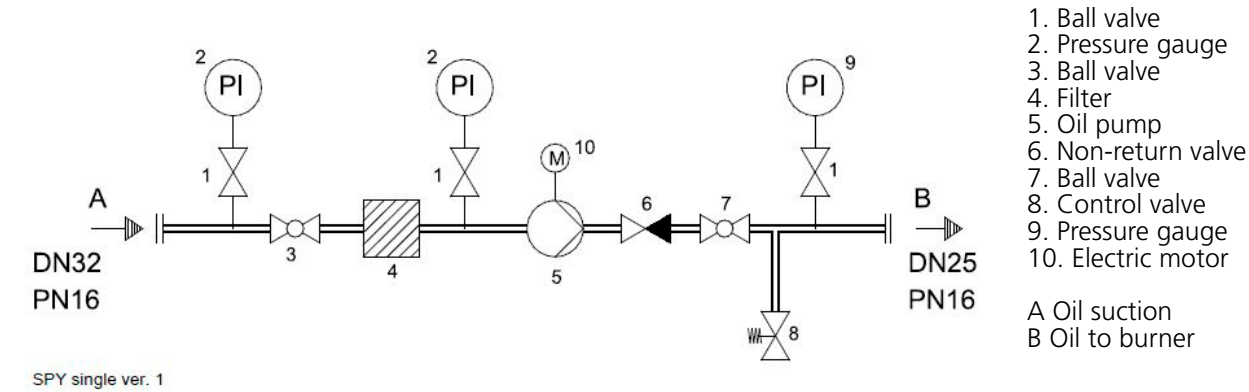

SPY-500-II...3000-II dual pump unit for light fuel oil

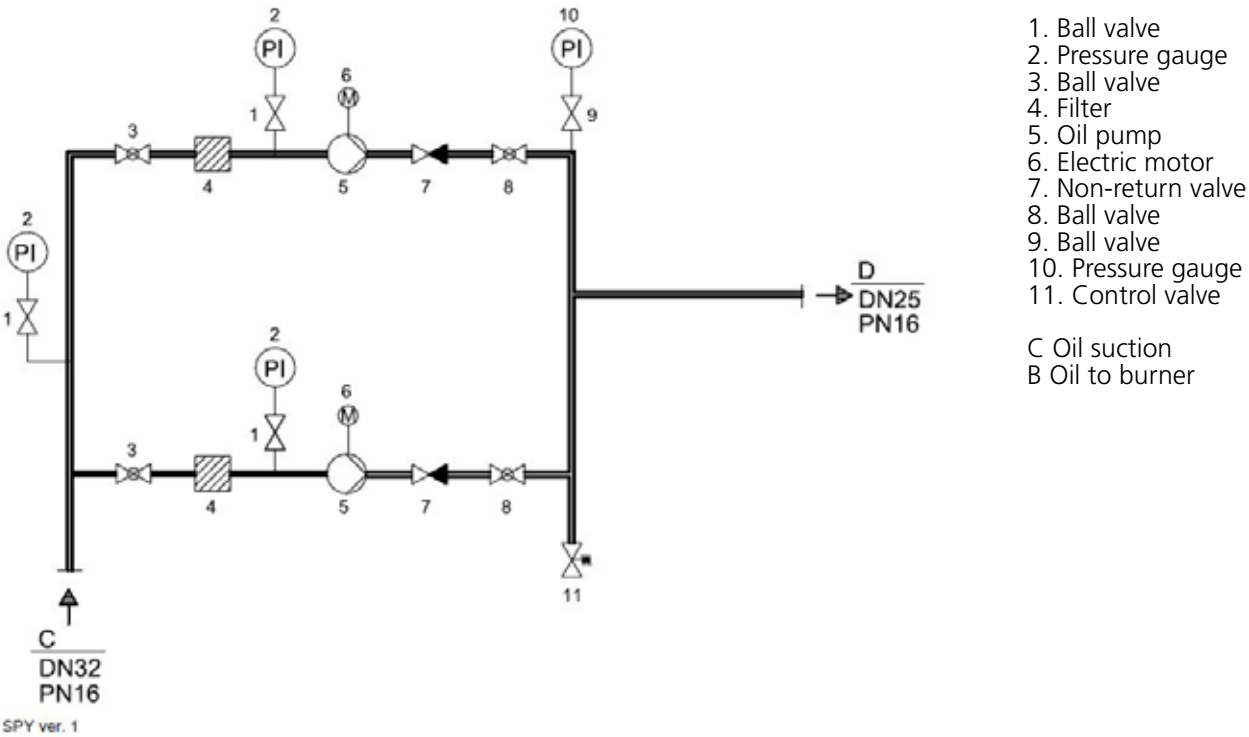

SPY delivery includes:

- oil filter
- oil pump « Allweiler » with electric motor
- pressure gauge
- separate overflow valve

Single pump unit	Dual pump unit	Pump capacity, kg/h at 4 bar 6 mm ² /s / 20°C
TYPE	TYPE	
SPY-500-I	SPY-500-II	670
SPY-800-I	SPY-800-II	940
SPY-1350-I	SPY-1350-II	1460
SPY-2000-I	SPY-2000-II	2120
SPY-2500-I	SPY-2500-II	2680
SPY-3000-I	SPY-3000-II	3250

Pumping unit for light oil with separate overflow valve

Burners for preheated combustion air

By using preheated combustion air, the overall efficiency rate of the plant improves remarkably.



When a burner is built to use preheated combustion air, its electric and mechanical parts are to be protected from heat.

ME	
Standard	< 50 °C
Hot Air	50 - 250 °C

ACE	
Standard	< 50 °C
Hot Air	50 - 200 °C
Request	200 - 400 °C

S, LITEX, K, LANCE	
To be defined when ordering	

Combustion air temperature effect on burner capacity

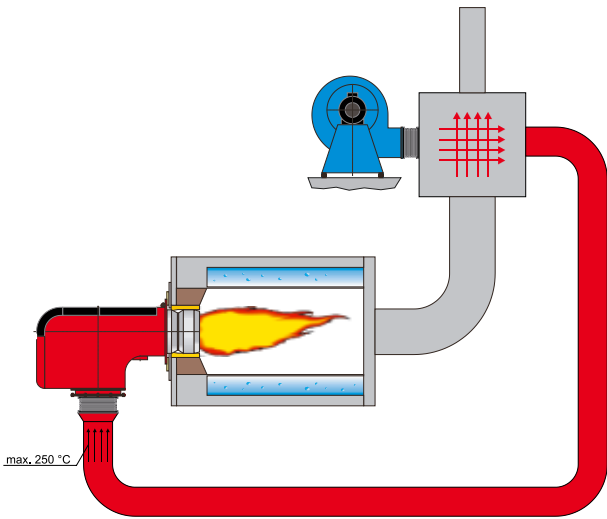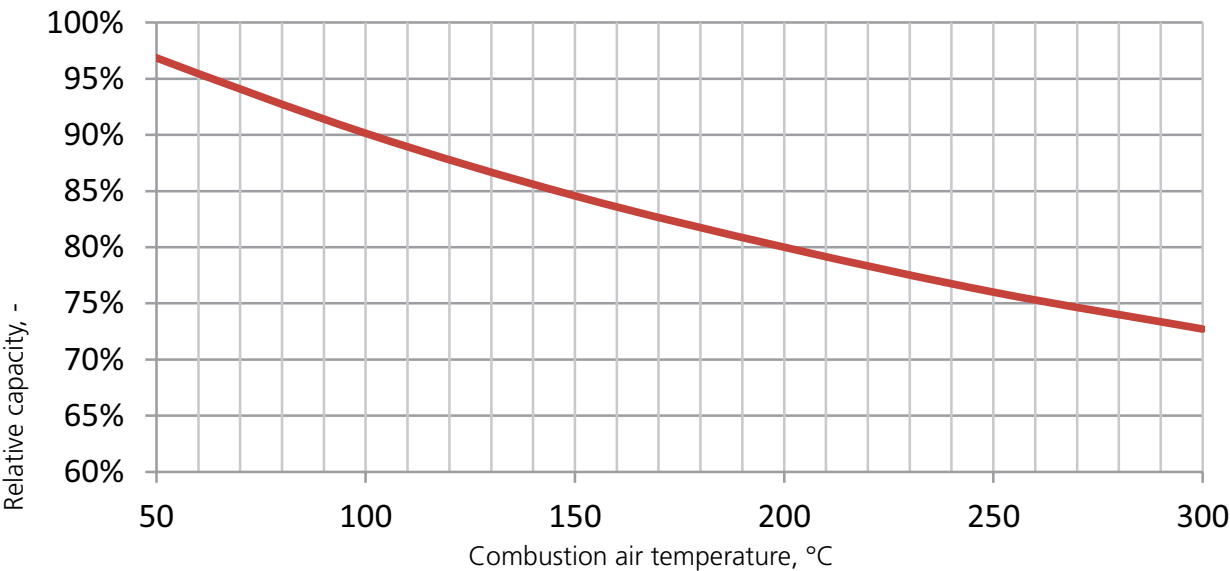


Principle diagram of a plant using preheated combustion air.

Oil preheater


Accurate temperature control guarantees good combustion

When firing heavy fuel oil, the right atomizing viscosity of the oil is essential for good combustion and low flue gas emissions.


A prerequisite for stable atomizing viscosity is that oil temperature stays even at all operating points.

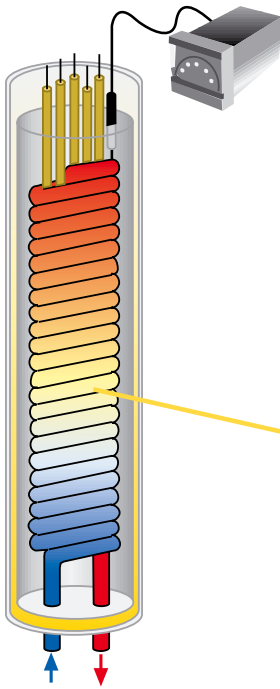

An Oilon ML mass preheater keeps the oil temperature stable even if oil supply temperature fluctuates. The unit's construction and electronic regulator keeps the temperature in the oil flowing to the nozzle stable. Depending on the capacity and model, the burner may have one or more 6-kW heaters equipped with a safety device to guard against overheating. Additionally, the electronic regulator has an integrated minimum temperature limiter which prevents the burner from starting if the oil is too cold.

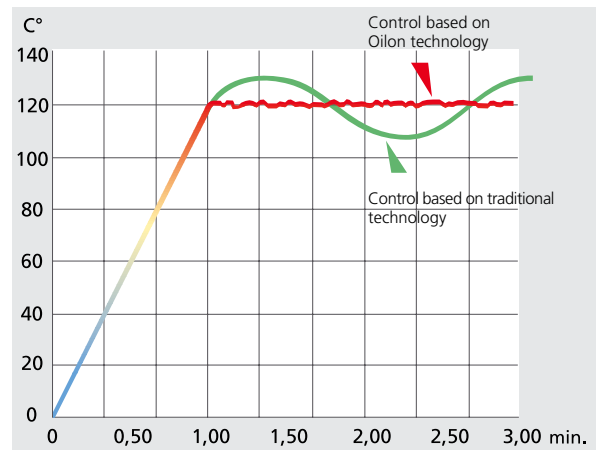

Gas pressure control assembly

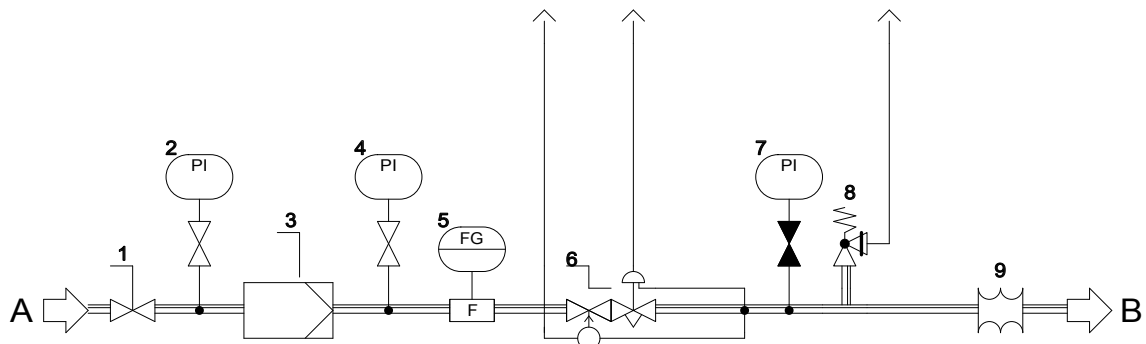


1. Manual shut-off valve
2. Pressure gauge
3. Gas filter
4. Pressure gauge
5. Flow measurement
6. Pressure regulator
7. Pressure gauge
8. Safety relief valve
9. Gas bellow

PI000645/20

A = Gas supply
B = Gas outlet

77

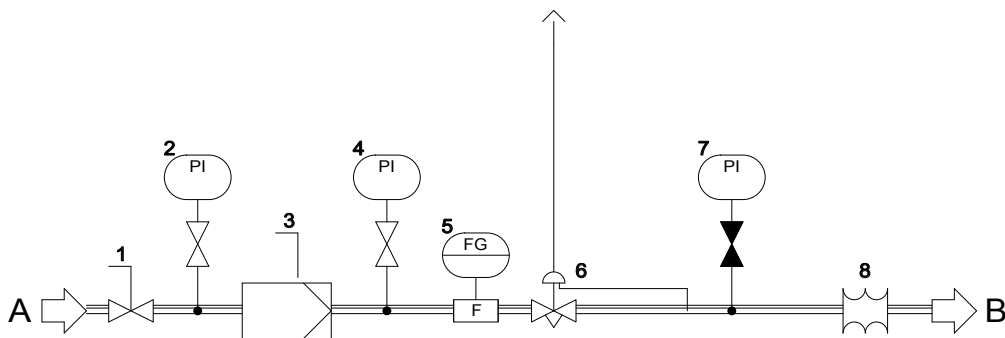

1. Manual shut-off valve
2. Pressure gauge
3. Gas filter
4. Pressure gauge
5. Flow measurement
6. Pressure regulator
7. Pressure gauge
8. Gas bellow


PI000645/21

A = Gas supply
B = Gas outlet

Customized Products and Solutions


Applications

Oilon's combustion technology can be utilized in various industrial processes and applications. Based on our long time experience, we understand the specific requirements and circumstances of different kind of boilers and plants. We have the expertise to provide burner solutions with advanced performance and high availability by selecting the optimal combustion technology, components, and materials for each application. Our specialists will support you in making decisions concerning combustion systems. Here are some typical applications for our solutions.

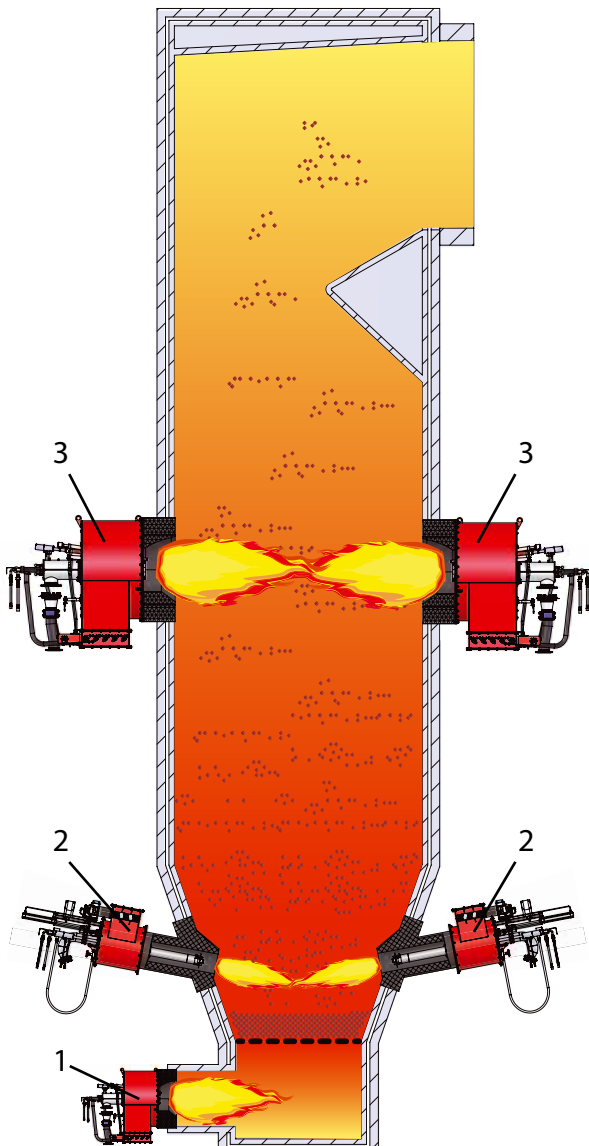



Fluidized bed boiler

1. Underbed start-up burner
2. Overbed start-up burner
3. Load burner

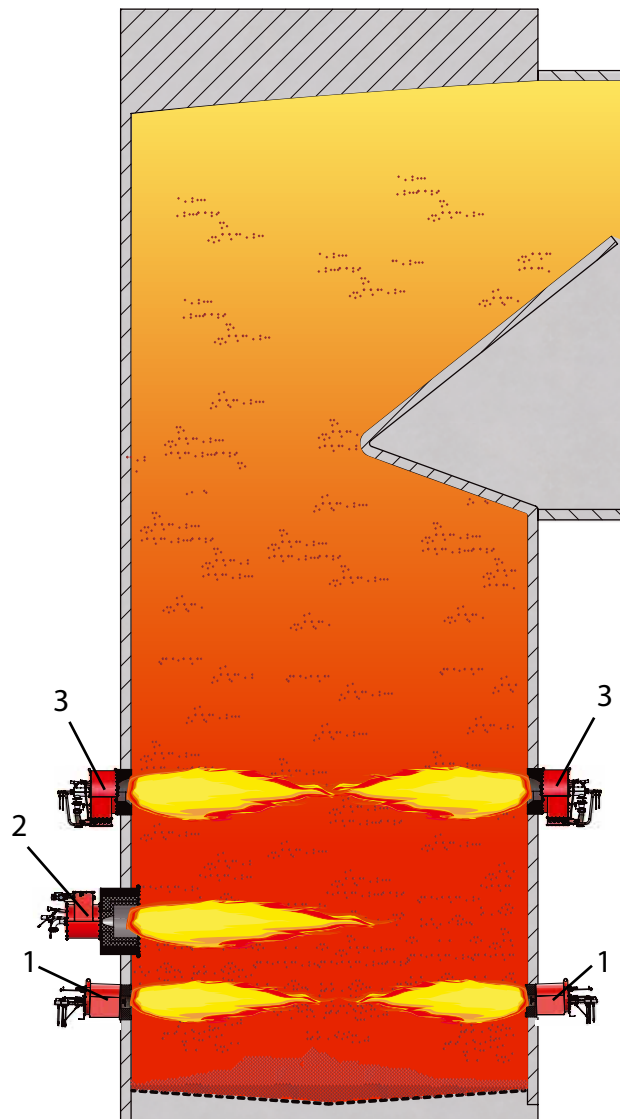

Recovery boiler

1. Start-up burner
2. Odorous gas burner
3. Load burner

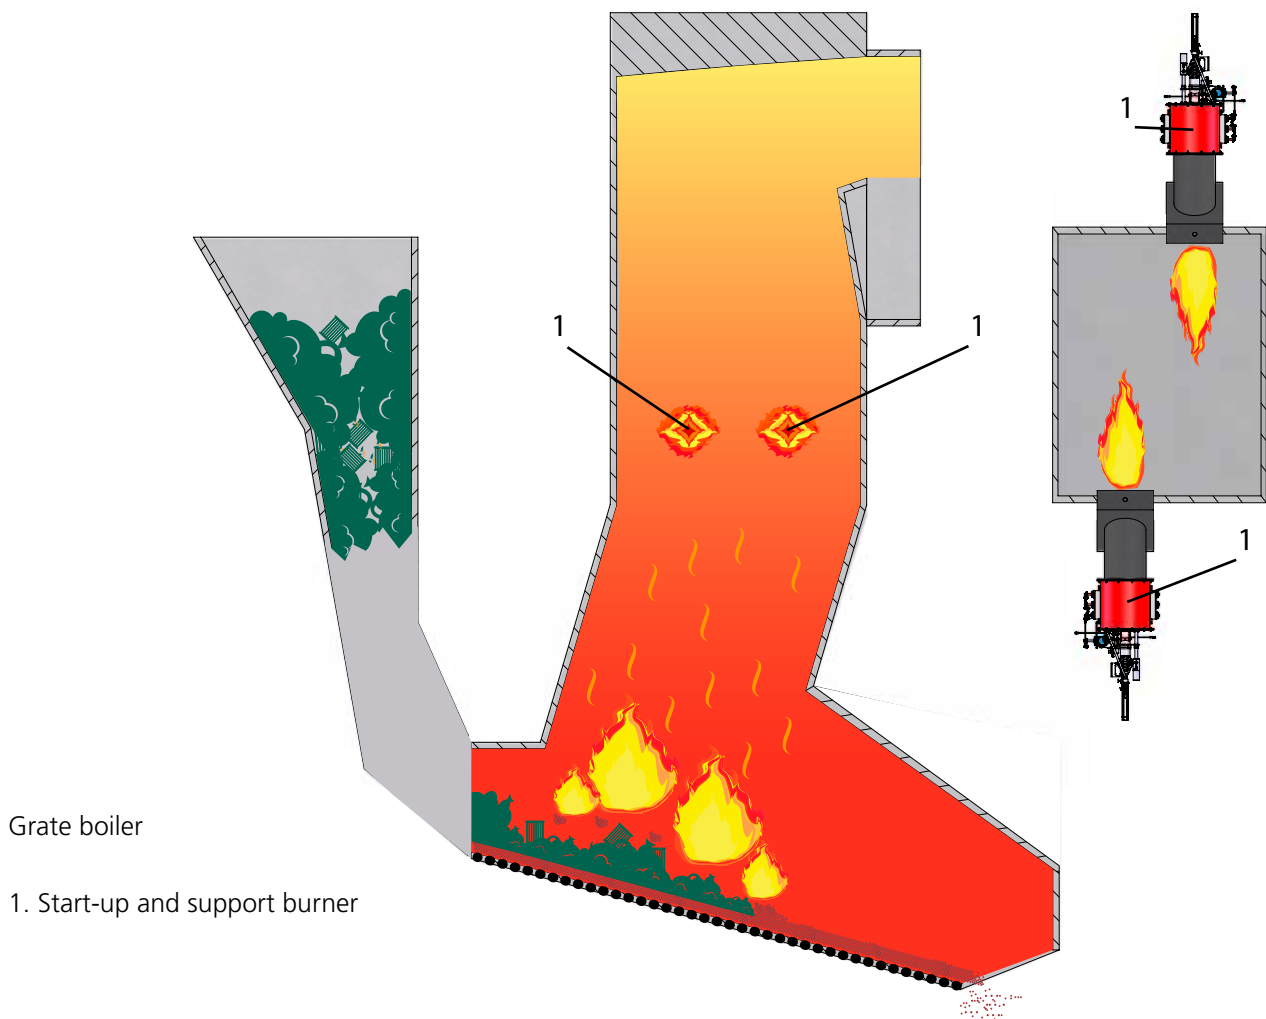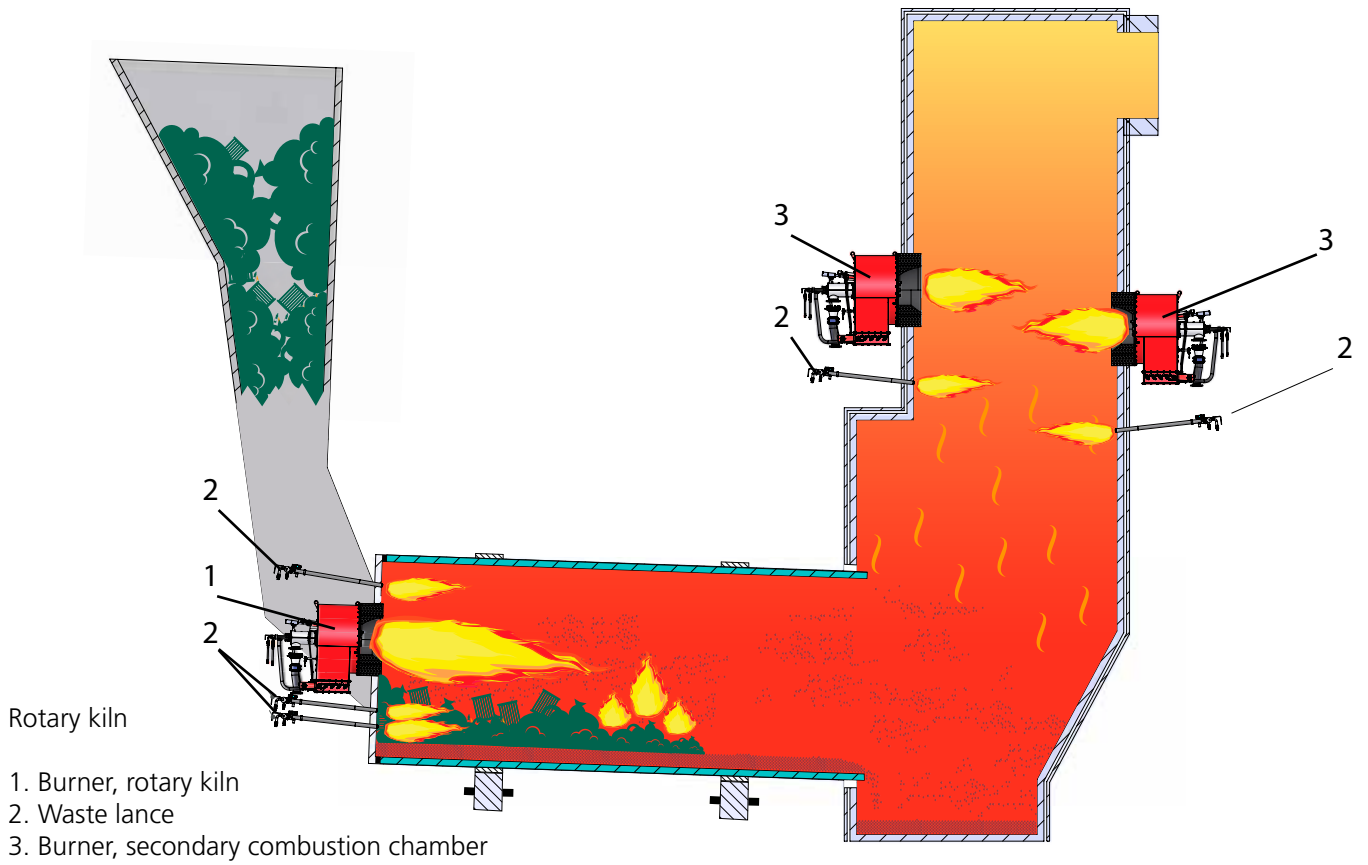

Fuels


In addition to standard, commercially available liquid and gaseous fuels, Oilon has the know-how and experience to employ a large range of other fuels ranging from gases with a low heating value to fuels with extremely intensive combustion. Our multi-fuel burners can fire fuels either one at a time or simultaneously. Below are listed some examples for which we offer proven and reliable combustion technology.

Gaseous fuels

- natural gas
- propane
- butane
- town gas
- bio gases
- carbon monoxide
- coke oven gas (COG)
- blast furnace gas (BFG)
- coal gas
- hydrogen
- process gases
- refinery gases
- etc.

Liquid fuels

- light fuel oil
- heavy fuel oil
- methanol
- tall oil
- pyrolysis oil
- butadiene
- turpentine
- waste oils
- hydraulic oils
- etc.

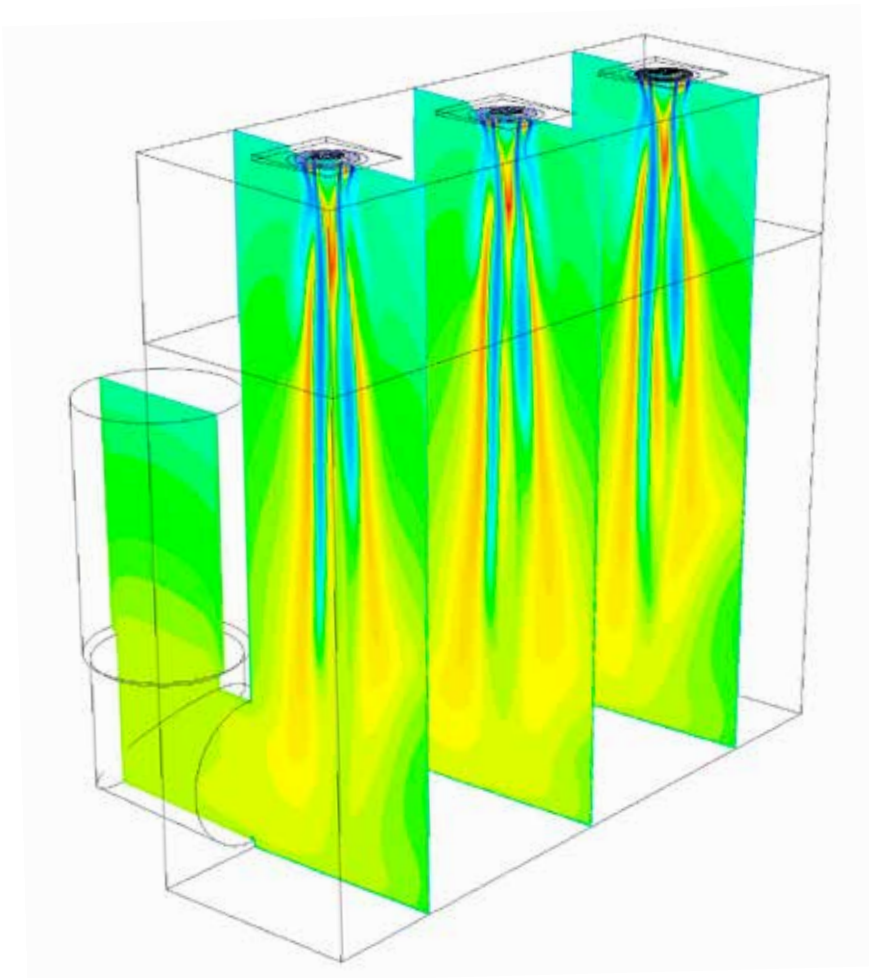


Customized burner features

The following features can be integrated into many of our burner types.

Waste lance

Fuels that contain large particles and/or cause corrosion and erosion can be fed through liquid waste lances. The materials and the fuel atomizing technology will be selected on a case-by-case basis to meet even highly demanding conditions. Burners can be equipped with several liquid lances.

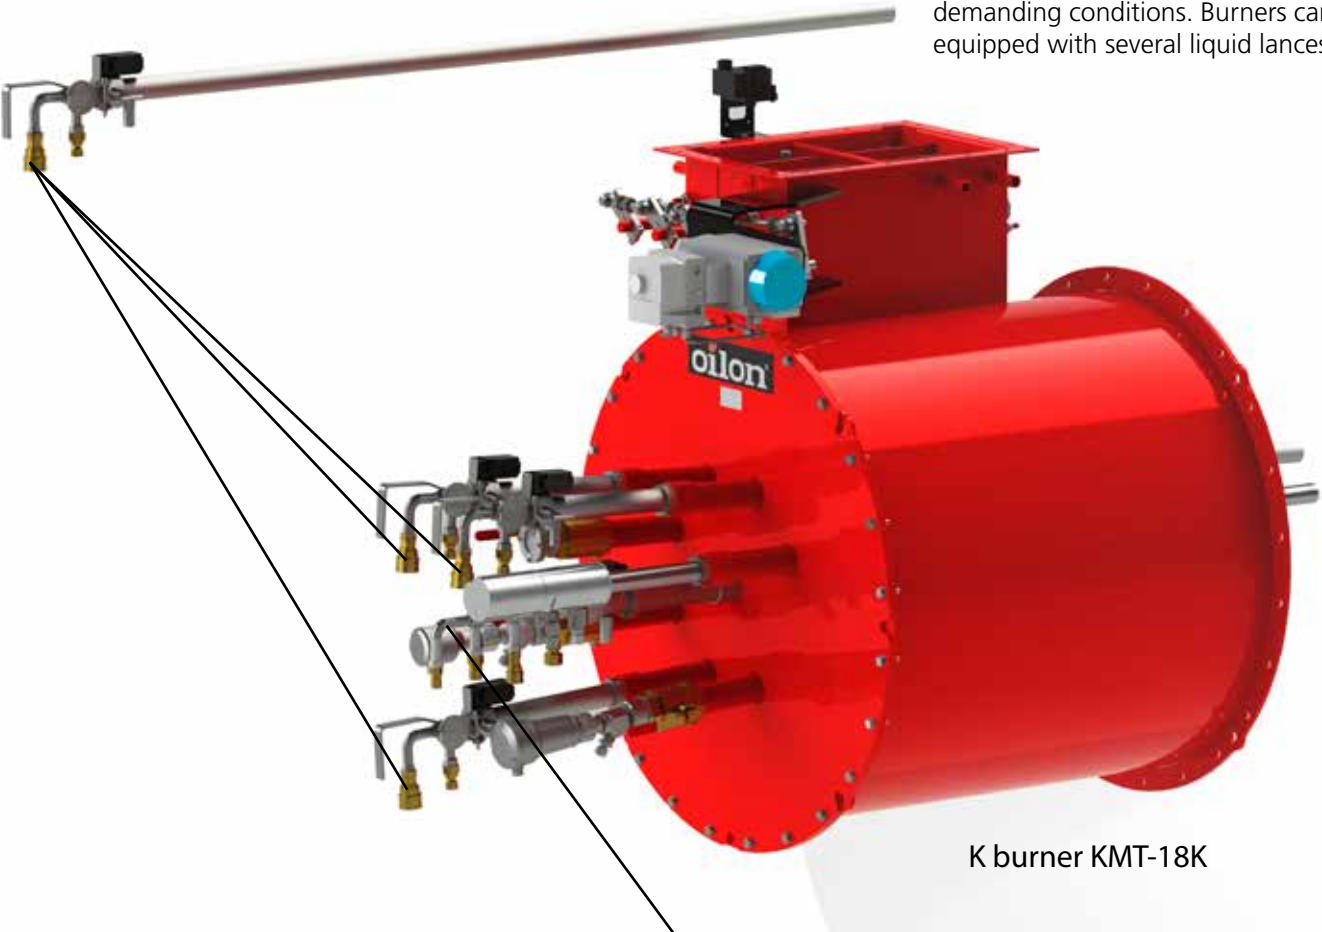

K burner KMT-18K


Dual-fuel liquid lance

Dual-fuel liquid lances can be used to combine two fuels, such as a liquid fuel produced by a plant process (side stream) and a commercially available fuel. Dual fuel lances are tailored based on fuel characteristics and the customer's needs.

Various liquid fuels can be fired either one at a time or simultaneously.

Combustion chamber

Typical applications for a refractory-lined combustion chamber include hot air generators and combustion of gases with a low calorific value. Oilon's proven combustion technology allows customers to fire Blast Furnace Gas (BFG) without any supporting fuel.

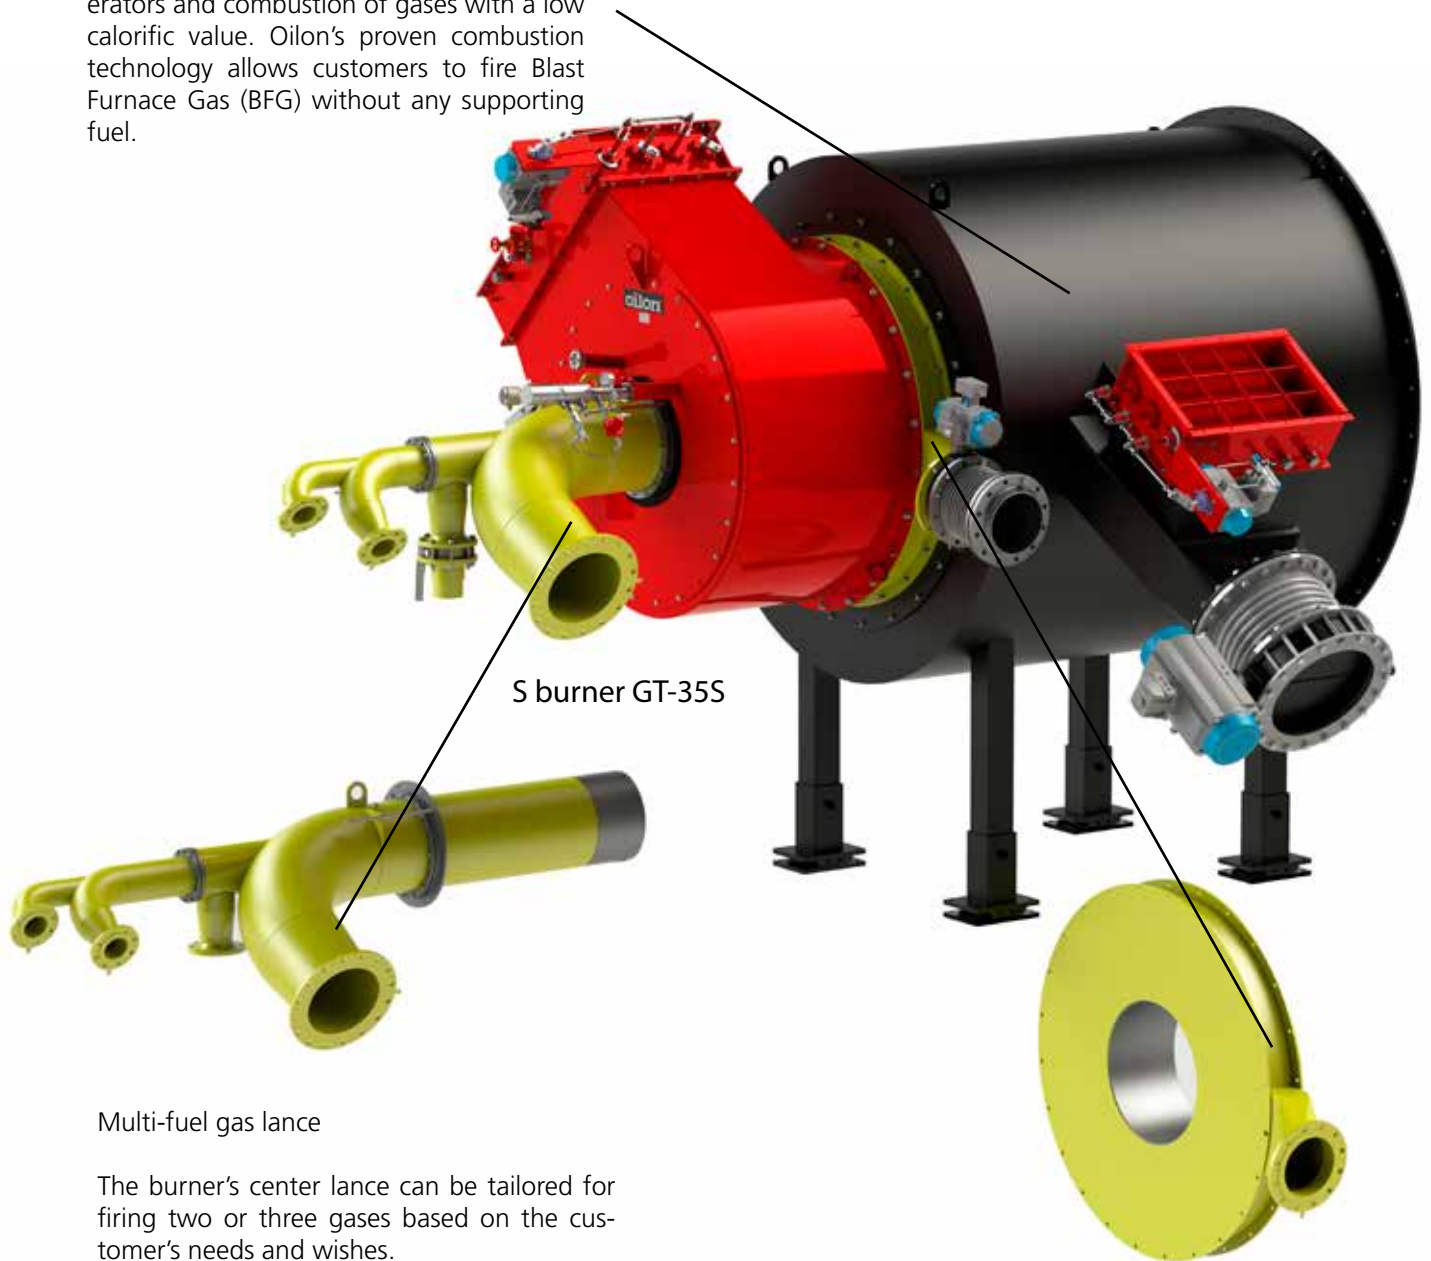

S burner GT-35S

Multi-fuel gas lance

The burner's center lance can be tailored for firing two or three gases based on the customer's needs and wishes.

Gas ring

With some gases that have a low calorific value, the gas volume can be too large for the center lance to handle. In such case, some of the gas can be fed through a gas ring.

The design of our gas lances, gas rings, and combustion chambers is based on long-term research and development, Computational Fluid Dynamics (CFD) modeling as well as our vast practical experience. The gas and air flows will be optimized on a case by case basis to guarantee the required performance. The various gases can be combusted either one at a time or simultaneously.

Retraction mechanism

When the burner is not in operation, the pilot burner and fuel lances can be retracted with a pneumatic cylinder. There are limit switches for the front and the back position.



Lance burner KL-650

Closing hatch

If the furnace should be closed off (from a cooling air flow, for example) when the burner is on standby, the burner throat opening can be blocked with a closing hatch (knife gate). The knife gate will close automatically when the burner is stopped.


บริษัท บุญเยี่ยมและสหาย จำกัด
BOONYIUM AND ASSOCIATES LTD.



1314-1322 ถ.ศรีนครินทร์
แขวงอ่อนนุช เขตสวนหลวง
กรุงเทพฯ 10250
1314-1322 SRINAKARIN Rd
ON-NUT SUANLUANG
BANGKOK 10250
Tel.02 322 1678 Fax.02 322 4329

www.boonyium.com

Customized valve units

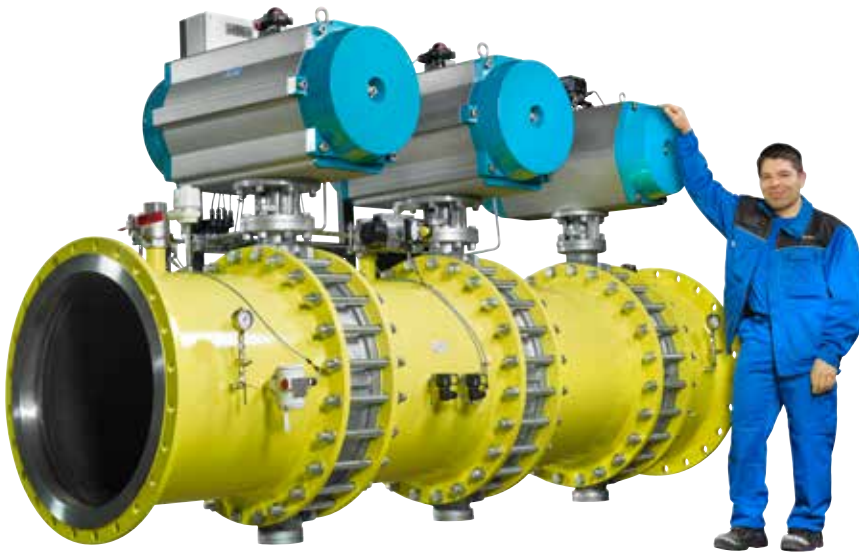

The nature and amount of gases may vary considerably depending on the fuel source. Gas corrosivity, surroundings as well as demanding process and climate conditions will be taken into account.



Shut-off valve units for several burners can be assembled into one common rack. It is also possible to combine several different fuels into one unit.



Multi-burner installations can be implemented using a common control unit for all burners or burner groups.

Oilon customer services and webshop



86

Implementation and maintenance services

We have extensive expertise in burner technology and processes. We offer reliable commissioning, maintenance, and training services for all needs. Our team will help you design a system that will meet environmental legislation and operate at optimal efficiency.

Technical support

The technical support service is intended for retailers, maintenance companies, and end customers. You can contact us with any questions about technical problems or warranty issues. We also design and implement updates for your burner systems with full expertise.

Spare part services

Our spare part service will support the customer throughout the product's life cycle.

- spare part recommendations for all applications
- spare parts for servicing and maintenance

Spare parts store

Service partners and dealers can order spare parts directly from our webshop. Contact our spare part sales team for the required login details.

Visit our spare parts webshop at

<http://webshop.oilon.com>



Modern training facilities



We provide high-level training for our products, and the goal of our product training is to improve the professional competence of installation and maintenance companies.

Our theoretical sessions focus on key considerations for our burners' operating environment and components. Practical exercises include burner adjustment and fault diagnostics, among many other things. We also underline the importance of low emission values for the environment.



Our Sales and Service Network



88

During our extensive years of operation, we have evolved from a small traditional burner manufacturer into a global well-known energy and environmental technology company.

Our strong commitment to research and development has resulted in growing staff know-how and a rapid increase in the product range.

We have production facilities and sales offices in Finland, USA, Brazil and China and resellers all over the world.